





CH3_4 Function Usage

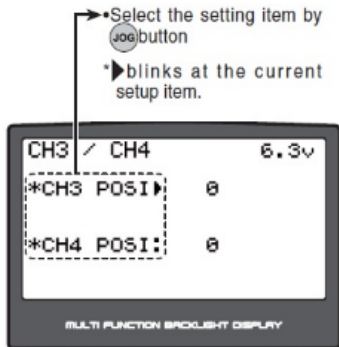

Setup Item
CH3 POSI :Channel 3 position
CH4 POSI :Channel 4 position

Futuba Radio Control

OR

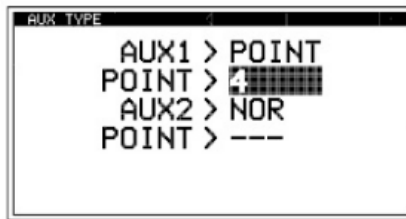

Sanwa Radio

Connect the speed control signal BEC wire (at the back) to CH2 of radio receiver



Connect the speed control signal wire(at front) to CH3/4(Futuba) or AUX 1/2(Sanwa) of radio receiver

Operation Procedures:

1. Connect the speed control signal wire (at front) to CH3/4(Futuba) or AUX 1/2(Sanwa) of radio receiver.
2. CH3/4 function items should be pre-set from Radon program card first.
3. When the speed control and radio power up, the pre-defined items value can be varied through the CH3/4(Futuba) or AUX 1/2(Sanwa) value on the radio.

Notes:

- The valid range of the CH3/4(Futuba) or AUX 1/2(Sanwa) is from -50 to +50.
e.g. if "IP Limiter" function is set in CH3 function in program card, the IP Limiter (1~30%) will be mapped to -50 to +50 CH3/4(Futuba) or AUX 1/2(Sanwa) value accordingly. If the radio value is set at 0, it mean the IP-Limiter is at around 15%.
- When the CH3/4 function is activated and signal wire(at front) is connected to radio, the original items function value set by the program card become invalid.