



TC3

SETUP SHEET Team Associated RC10TC3 4WD Touring Car


Driver: CRAIG DRESCHERSNETTERTONTrack/City: REEDY INTERNATIONAL MAY 5-7, 01

Event: _____ Date: _____

FRONT SUSPENSION

CASTER ☐ 0° ☐ 2° ☒ 4° ANTI-ROLL BAR: ☒ None ☐ Size: _____KICKUP ☒ 0° ☐ 2° ☐ -2°TOE-IN 0° TOE-OUT 0°CAMBER -1.5°

RIDE HEIGHT

BUMP
STEER
STD

ACKERMAN SETTING

☒ Std ☐ Other: _____

Ball end: _____

Spacer: _____



FRONT SHOCKS

BODY ☐ Composite ☒ Alum.SHAFT ☐ Std ☒ Other: UNOBTAINIUM

LIMITERS:

Inside: _____


Outside: _____

DROOP GAUGE #: 4.5PISTON # 3OIL 60 WTSPRING REDSHOCK MOUNT &
CAMBER LINK
Fill in holes used

REAR SUSPENSION

ANTI-SQUAT ☒ 0° ☐ 2°ANTI-ROLL BAR: ☒ None ☐ Size: _____TOE-IN ☐ 3° ☐ Other: 2CAMBER: 1.5°

RIDE HEIGHT

WHEELBASE
ADJUSTMENT**FRONT**☐ Short☒ Medium☐ Long


REAR SHOCKS

BODY ☐ Composite ☒ Alum.SHAFT ☐ Std ☒ Other: UNOBTAINIUM

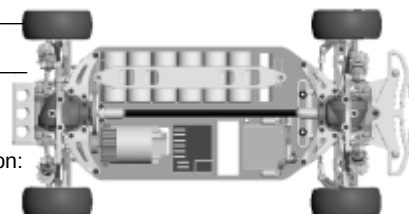
LIMITERS:

Inside: _____

Outside: _____

DROOP GAUGE #: 4PISTON # 3OIL 40 WTSPRING BLUESHOCK MOUNT &
CAMBER LINK
Fill in holes used

OTHER

FRONT TIRES: H13 Compound: _____ Insert: PIT M Wheel: VELOCITYREAR TIRES: H13 Compound: _____ Insert: PIT M Wheel: VELOCITYBATTERY PLACEMENT ☐ Back ☒ Front ☐ Other: _____ BATTERY TYPE: _____CHASSIS ☒ Std ☐ Carbon FiberFRONT/REAR DRIVE ☐ Std ☒ One-waySPUR/PINION 96 T / 44 TMOTOR REEDY TI 12X2BRUSH QUASARSPRING STDRADIO KOSERVO AIRTRONICSESC LRPBODY PROTOFORM VECTRAWING STDTIRE ADDITIVE _____
☐ NoneLEAD WEIGHTS 40G (oz/gm) Indicate location:
☐ None

TRACK CONDITIONS

SURFACE: ☒ Smooth ☐ BumpyTRACTION: ☐ Low ☒ Med. ☐ High

COMPOSITION:

☐ Concrete ☒ Asphalt ☐ Carpet ☐ Other: _____NOTES: HOTTER CONDITIONS HARDER INSERT WORKEDBETTER. BELTING WAS A PERSONAL THING--SMOOTHER MAYBE NOT FASTER.

RACE COMMENTS

MAIN A FINISH 1 QUALIFYING. POS. 3RD

NOTES: _____

CAR COMMENTS

NOTES: _____