A800

SETUP SHEET

Alterations by Arn0 at PetitRC.com

NAME	Colin Jackson
COUNTRY	UK
RACE	BRCA 2016 Rd 2 17.5
TRACK	STAFFORD

DATE 17\04\2016 TEMP.°C AIR / TRACK 13°C / 27°C

CARPET ☐ ASPHALT ☑

TRACK CONDITION TECHNICAL ☐ MIXED ☑ FAST ☑

TRACTION LOW ☑ MEDIUM ☑ HIGH ☐

FRONT

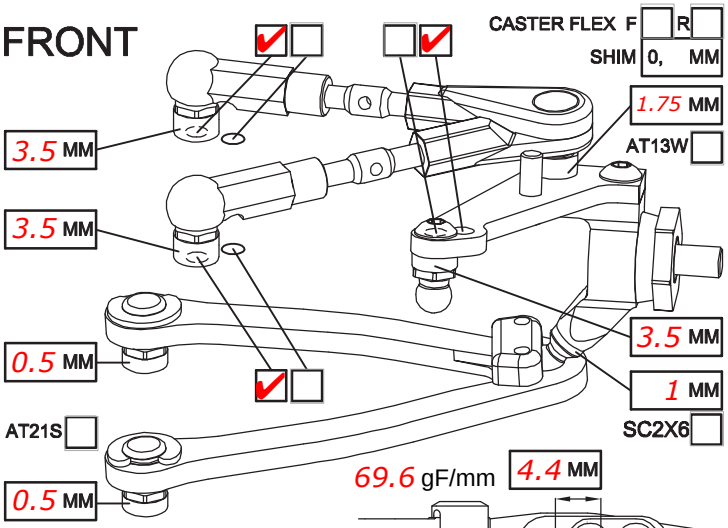

69.6 gF/mm

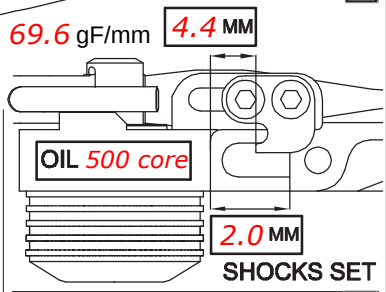

SHOCKS SET

CAMBER ANGLE / °	2	ROTOR	STD ☑	☐
CASTER ANGLE / °	4	SPRING	STD ☐	S ☑
TOE ANGLE / °	0.5 each wheel	DAMPER	D2.1 ☑	☐
RIDE HEIGHT / MM	5.8	ACTION	SYM. ☑	ASYM. ☐
DOWNSTOP / MM	5.5 (10mmblock)	SRS/RHS ARR.	I ☑	II ☐
UPSTOP / MM	Max			
STABILIZER Ø / MM	1.1			
LOW ARM	C04AL ☐ +0.5 ☑			
STEERING ARM	STD ☑ ☐			
WHEEL SPACER / MM	0.75 each side			

FRONT DRIVE ☐ GD3 ☐ SPOOL ☑ GD2B ☐

DIFF OIL | DIFF WASHERS

DOGBONE DRIVE ST17-1 ☑ ST11 ☑ ST12 ☐ BB ☐ ST02 ☐

REAR

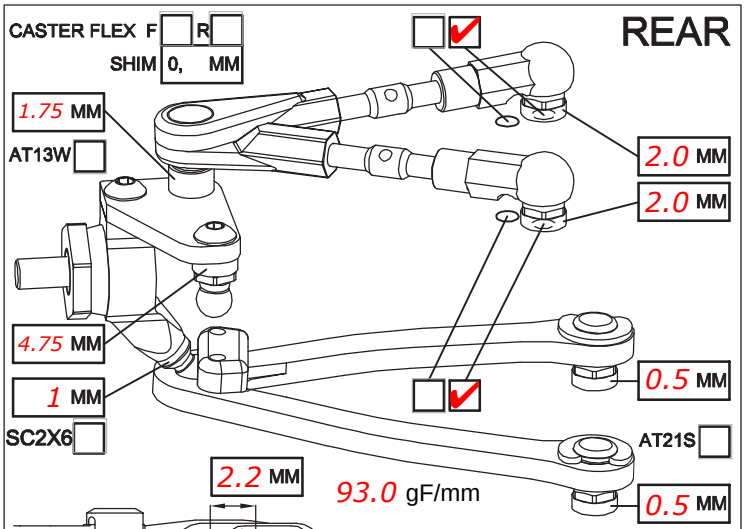

93.0 gF/mm

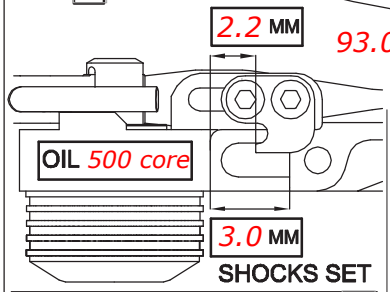

SHOCKS SET

CAMBER ANGLE / °	2	ROTOR	STD ☑	☐
CASTER ANGLE / °	0 deg angle	SPRING	STD ☐	S ☑
TOE ANGLE / °	3	DAMPER	D2.1 ☐	☐
RIDE HEIGHT / MM	6.0	ACTION	SYM. ☐	ASYM. ☐
DOWNSTOP / MM	4.5 (10mm block)	SRS/RHS ARR.	I ☑	II ☐
UPSTOP / MM	max			
STABILIZER Ø / MM	1.0			
LOW ARM	C04AL ☐ +0.5 ☑			
STEERING ARM	STD ☑ ☐			
WHEEL SPACER / MM	0			

REAR DRIVE ☐ GD3R ☐ GD2B ☑

DIFF OIL 2k CORE | DIFF WASHERS standard

DOGBONE DRIVE ST11 ☑ ST12 ☐ BB ☐ ST17-1 ☐ EVD ☐

FRAME FLEX SETTING

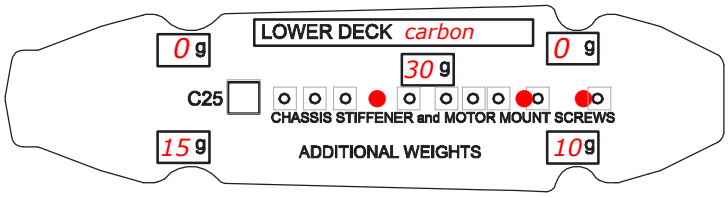

CHASSIS STIFFENER AM110 ☐ AM115 ☐ ST130 ☑

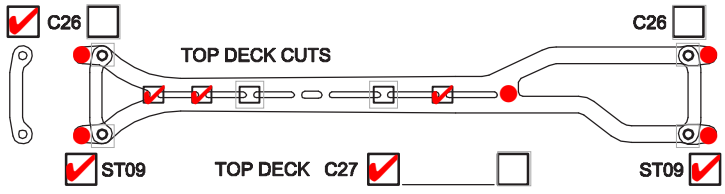

COMMENTS

battery weight 331g. If reg battery used (270g ish) run st160 with 10 grams each corner



TIRES	FRONT	REAR
BRAND	sorex 32	sorex 32
INSERTS	RY BRCA	RY BRCA
WHEELS	revlight	revlight
ADDITIVE	MR33	MR33

MOTOR LATERAL SHIFT / MM	0	MOTOR	ACTINIUM
ACKERMANN SHIMS / MM	1mm	SERVO	AWESOMATIX
DRIVE RATIO	3.2	ESC	LRP FLOW
SPUR 85	PINION 50	BATTERY	LRP STOCK SPEC 7500
BODY	LTCR 1	RECEIVER	KO
WING	DART reg weight		v5.4 SOFTWARE

BEST LAPTIME 16.02 QUALIF. / FINAL POSITION 1 / DNF

ESC SETTING V5.4 MAX initial drive, all else std

COMMENTS / IMPRESSIONS

spr02h
c04m-0.5
Body +6mm, wing mounted 2nd hole back

CONTACT bigmolas@gmail.com