


A800MMX

1/10-SCALE TOURING CAR

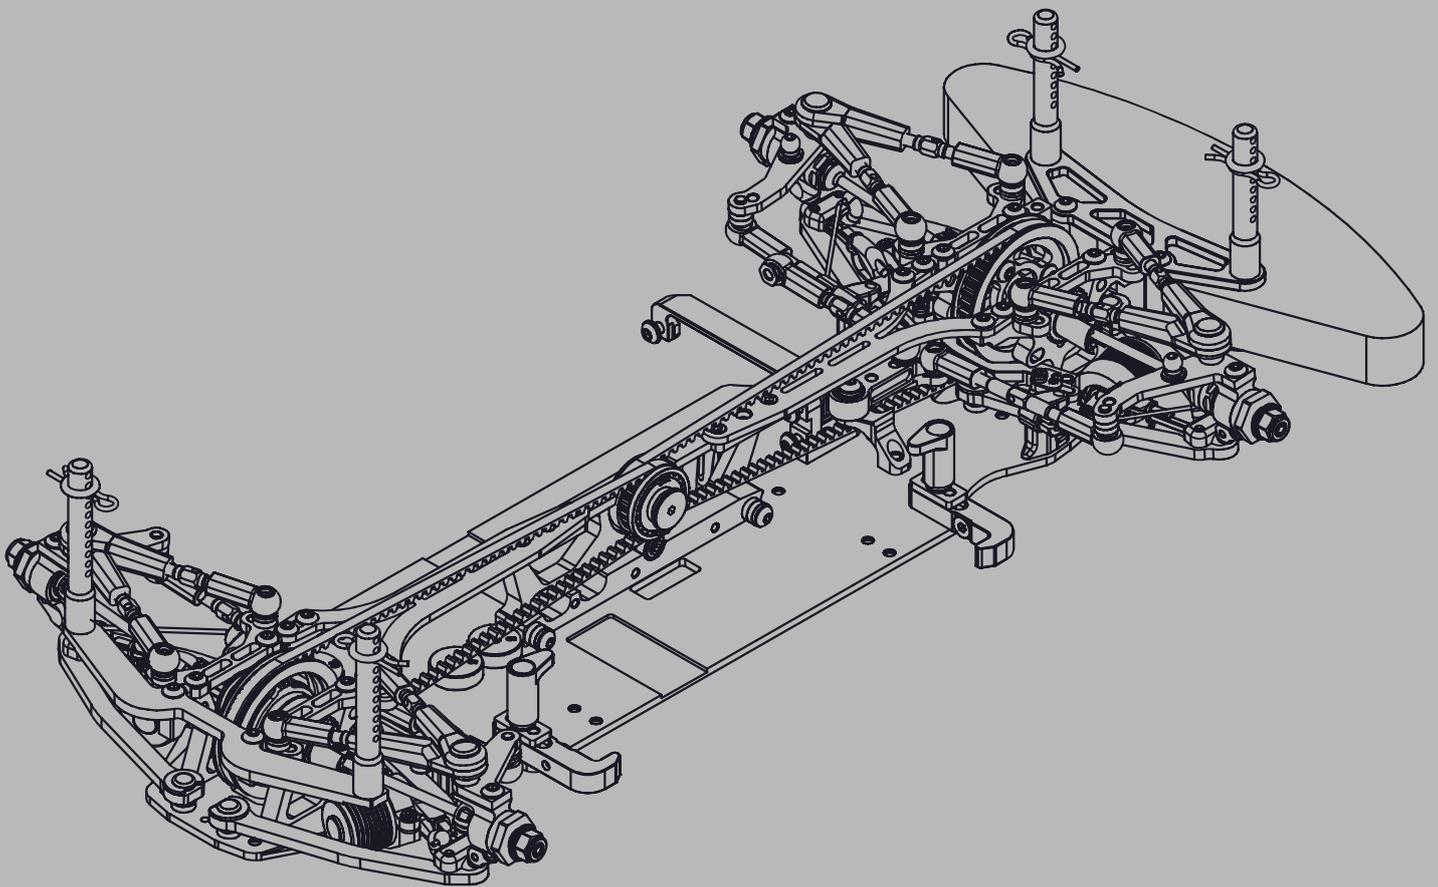

INSTRUCTION MANUAL

INTRODUCTION

Congratulations on purchasing your Awesomatix car!

The A800MMX car was produced by UAB "Awesomatix" company.

The A800MMX car utilises many unique features, including some patented innovations.

BEFORE YOU START

The A800MMX car is the high-quality, innovative 1/10-scale touring car and should be built only by persons with previous experience building R/C model racing cars.

This is not a toy and is not intended for use by children without direct supervision of a responsible, knowledgeable adult. Read the instruction manual carefully and fully understand it before beginning assembly. If you have any problems or questions please do not hesitate to contact the Awesomatix team at support@awesomatix.com. If, for any reason, you decide that you do not want your A800MMX car you must not begin assembly.

Your A800MMX car cannot be returned to UAB "Awesomatix" for a refund or exchange if it has been fully or partially assembled.

This kit is a radio controlled model racing product and could cause harm and personal injury.

The A800MMX car is designed for use on r/c car race tracks. It should not be used in general public areas.

UAB "Awesomatix" accepts no responsibility for any injuries caused by making or using this kit.

Due to policy of continuous product development the exact specifications of the kit may vary.

UAB "Awesomatix" do reserve all rights to change any specifications without prior notice. All rights reserved.

ASSEMBLY NOTES

Before starting each build-stage check that you have the right quantity and size of items for the build-stage. To assist you with the assembly of your A800MMX car we have included full-size images of all the small hardware parts laid out so that you can place items on top of the images to check are they correct size/length. You can find the useful tips and pictures of A800MMX assembling on the Internet site: <http://site.petitrc.com/reglages/awesomatix/SetupSheetsAwesomatixA800.html>

GENERAL PRECAUTIONS

- Many of the items in this kit are small enough to be accidentally swallowed and are therefore potential choking hazards, making them potentially fatal. Please ensure that when assembling the kit you do so out of the reach of small/young children.
- Take care when building, as some parts may have sharp edges.
- Please read this manual carefully to understand which ancillary items (tools, electrics, electronics etc) are used with this kit. UAB "Awesomatix" accepts no responsibility for the operation of any such ancillary items.
- Exercise care when using tools and sharp instruments.
- Follow the operating instructions for the radio equipment at all times.
- Never touch rotating parts of the car as this may cause injury.
- Keep the wheels of the model off the ground when checking the operation of the radio equipment.
- To prevent any serious personal injury and/or damage to property, be responsible when operating all remote controlled models.
- The model car is not intended for use on roads or areas where its operation can conflict with or disrupt pedestrian or vehicular traffic.
- Do not run your car in poor light or if it goes out of sight. Any impairment to your vision may result in damage to your car or, worse, injury to others or their property.
- As a radio controlled device, your car is subject to radio interference from things beyond your control. Any such interference may cause a loss of control of your car so please consider this possibility at all times.
- When not using RC model, always disconnect and remove battery.
- Insulate any exposed electrical wiring to prevent dangerous short circuits. Take maximum care in wiring, connecting and insulating cables. Make sure cables are always connected securely. Check connectors for if they become loose and if so reconnect them securely. Never use R/C models with damaged wires. A damaged wire is extremely dangerous and can cause short-circuits resulting in fire.


EQUIPMENT RECOMMENDED (NOT INCLUDED)

- Radio Transmitter
- Radio Receiver
- Electronic Speed Control
- Steering Servo
- Servo Horn
- Electric Motor
- Pinion Gear (64 or 48 Pitch)
- Spur Gear (64 or 48 Pitch)
- 7.4 V Li-Po Battery
- 190mm Body Shell
- Touring Car Wheels, Tires, Inserts

TOOLS RECOMMENDED (NOT INCLUDED)

- 1.5mm, 2.0mm Hex Driver
- 5.5mm, 9mm, 3/8", 10mm Wrenches
- Callipers
- Hobby Knife
- Camber Gauge
- Ride Height Gauge
- Thin CA Glue
- Thread Lock
- Diff Silicone Oil
- 450cst Silicone Shock Oil
- Joint Grease

STEP 1

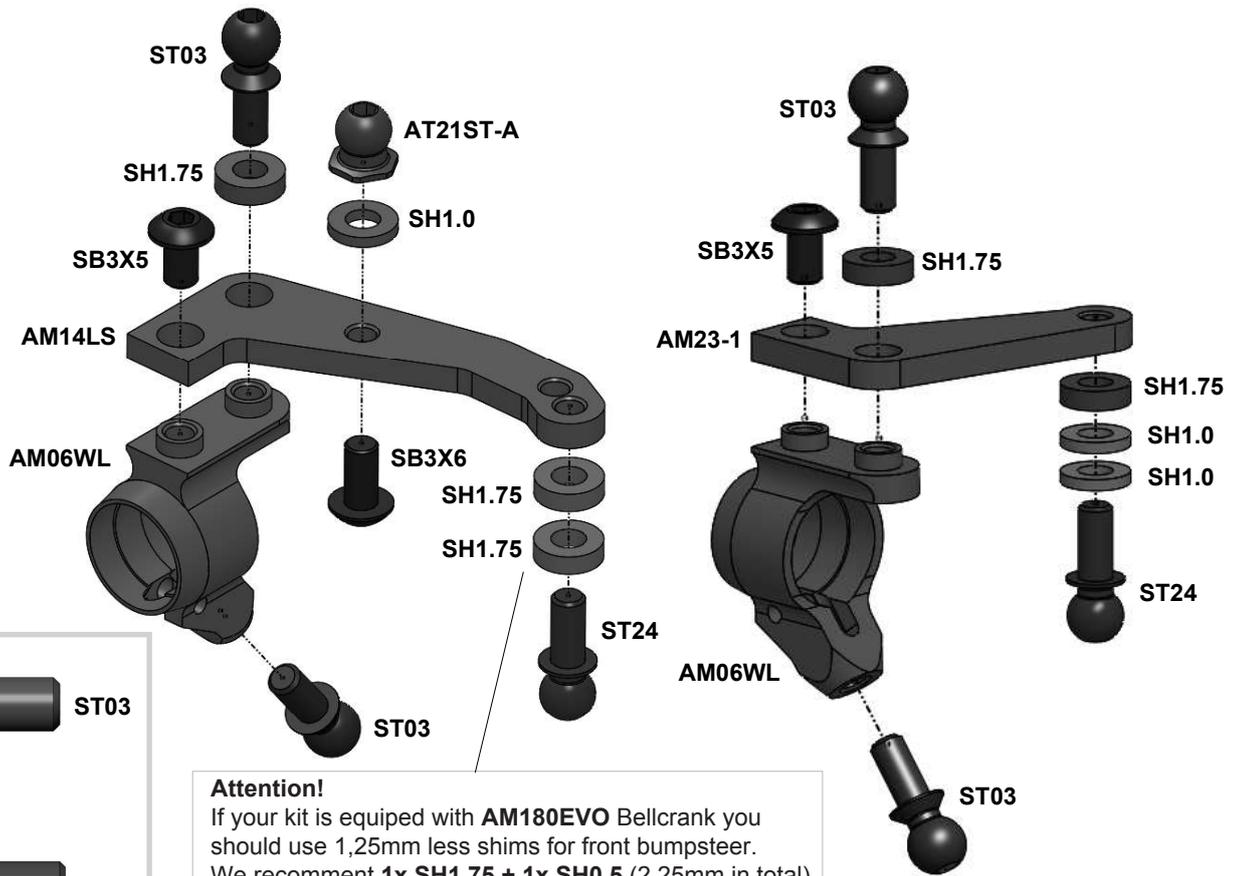

Attention!
 If your kit is equipped with **AM180EVO** Bellcrank you should use 1,25mm less shims for front bumpsteer. We recommend **1x SH1.75 + 1x SH0.5** (2,25mm in total)


Note: The last turns of the lower ST03 Ball Studs and SB3X5 screws can be tight, Screw them with force.

Note the difference between **ST03** and **ST24** Ball Studs!


		SB3X5 M3x5 Button Head Screw	x4		ST03 Ball Stud	x8
		SB3X6 M3x6 Button Head Screw	x2		AM06WL Steering Block	x4
		SH1.0 6x3x1mm Spacer (Gray)	x6		AM14LS Steering Arm	x2
		SH1.75 6x3x1.75mm Spacer (Black)	x10		AM23-1 Rear Steering Arm	x2
		AT21ST-A Pivot Ball	x2		ST24 4,8mm Ball Stud	x4

STEP 1 FINISHED

Note: Use other combinations of **SH0.5**, **SH1.0** and **SH1.75** Spacers under appropriate Pivot Balls and Ball Studs to adjust your car set-up to better suit different track conditions.

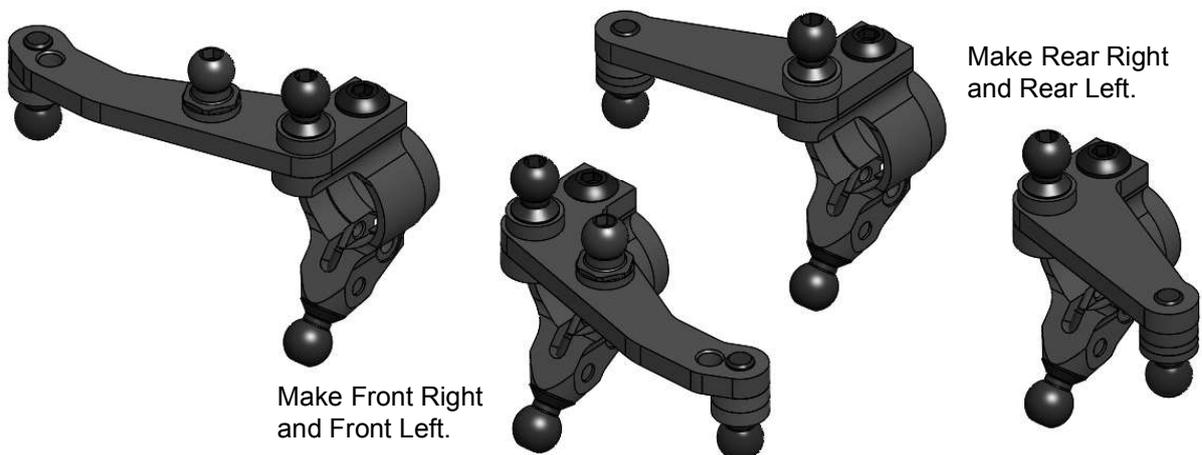



STEP 2

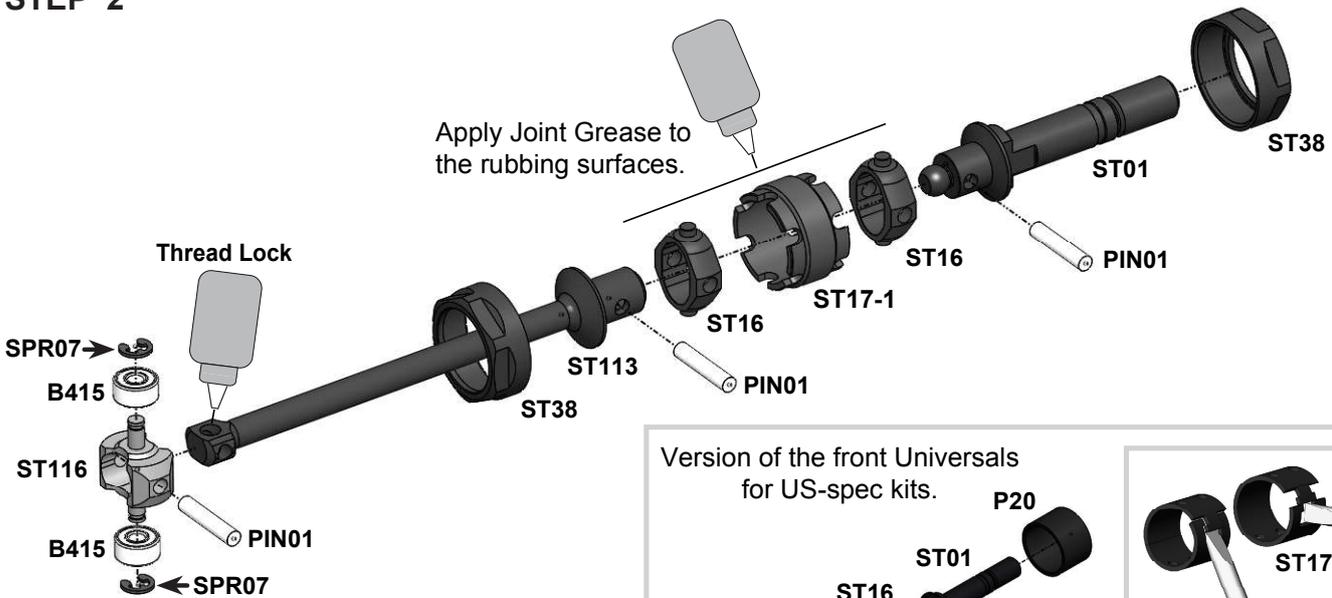

Attention!

Note the mutual orientation of **ST16** at screwing of **ST38**.
The pins of both **ST16** should be parallel to each other. The recommended wrench for screwing of **ST38** is 3/8 US standard wrench (~9,53 mm).

Version of the front Universals for US-spec kits.

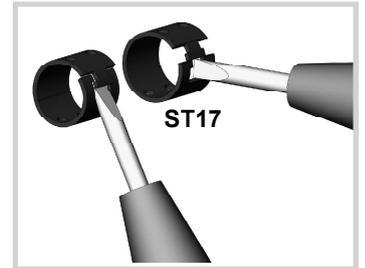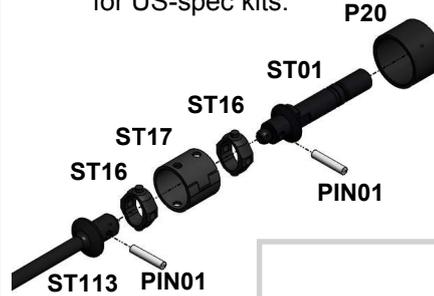

1. Insert a 2.5mm flat screwdriver tip into **ST17** Universal Ring slot, bend of the lug and turn screwdriver through 90 deg.
2. Take out/insert **ST16** U-Joint Cross from/into unclamped **ST17** Universal Ring.

STEP 2 FINISHED

	PIN01 1.5x7.8 Pin	x6	ST01 Front Axle	x2
	SPR07 E-Ring	x4	ST16 U-Joint Cross	x4
	B415 Bearing	x4	ST17-1 Universal Ring	x2
	ST116 IFJ/IRJ Cross	x2	ST113 Front Universal Bone	x2
			ST38 Universals Nut	x4



Make 2 Front Universals.



Front Universals for US-spec kits.




STEP 3

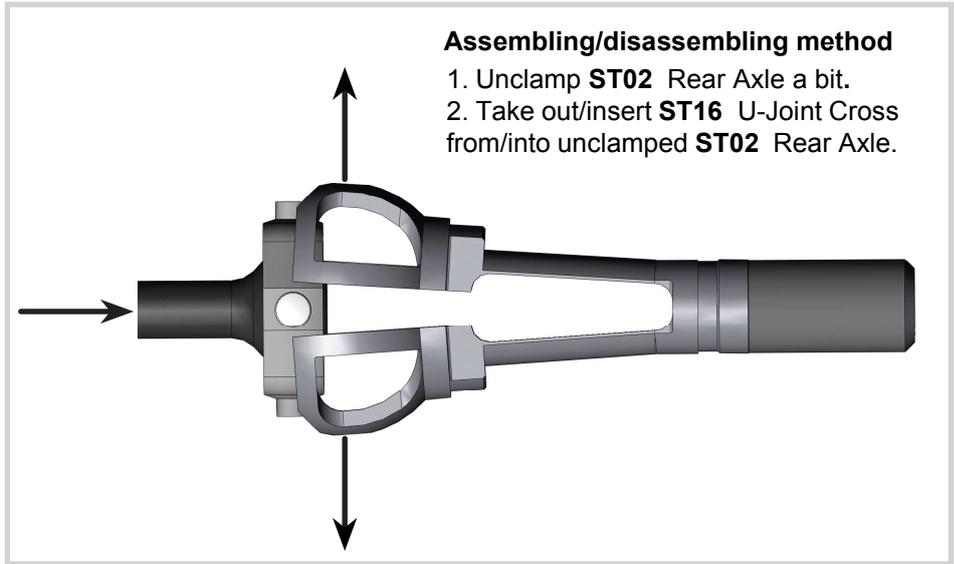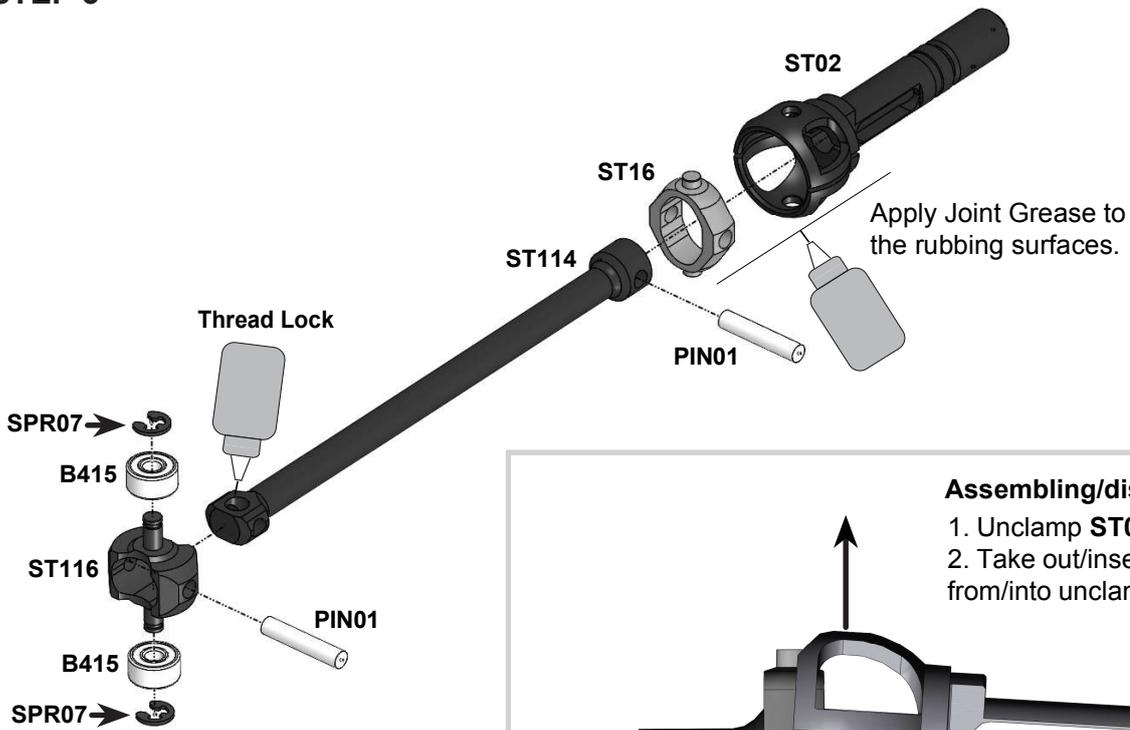


	PIN01 1.5x7.8 Pin	x4	ST02 Rear Axle	x2
	SPR07 E-Ring	x4	ST16 U-Joint Cross	x2
	B415 Bearing	x4	ST114 Rear Universal Bone	x2
			ST116 IFJ/IRJ Cross	x2

STEP 3 FINISHED

Make 2 Rear Universals.

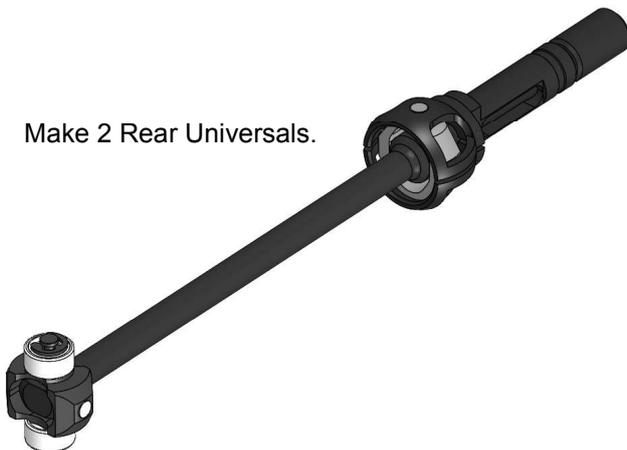


Tip:
Use a 2.5mm flat screwdriver to unclamp **ST02** Rear Axle.

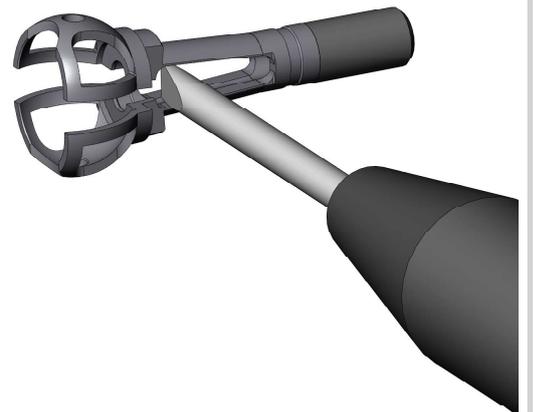


STEP 4

Note: We recommend to install **SC2X6** screws only at high traction conditions.

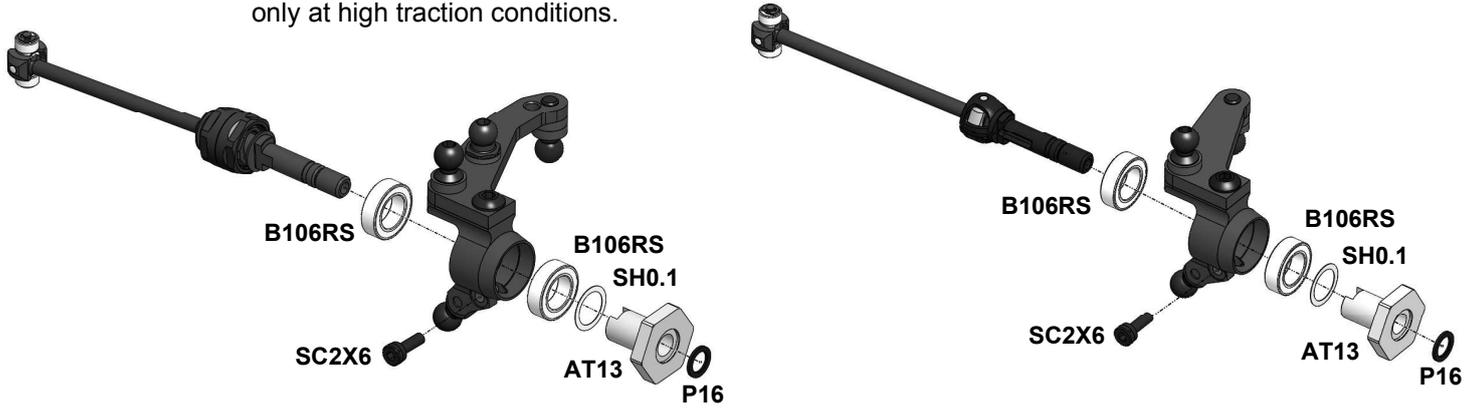

	B106RS MR106RS Bearing	x8		AT13 Wheel Hex	x4
	SC2X6 M2x6 Cap Head Screw	x4		SH0.1 6x8x0.1mm Shim	x4
	P16 Lock Ring (transparent colour)	x4			

STEP 4 FINISHED


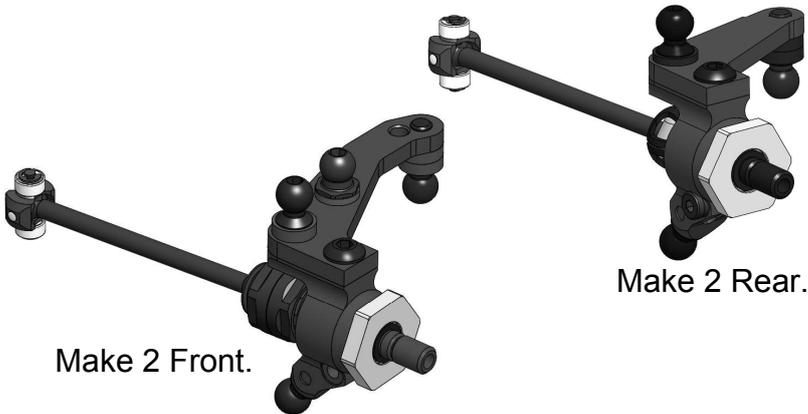


Note: Rear Universals may be a bit tight at this stage. But don't worry as the Rear Universals take its true position after the wheels are mounted.




STEP 5

	SB25X8 M2.5x8 Button Head Screw	x8
	C04M1+8.0 Suspension Arm	x2
	C04M1+9.0 Suspension Arm	x2
	P04 Arm Hasp	x4

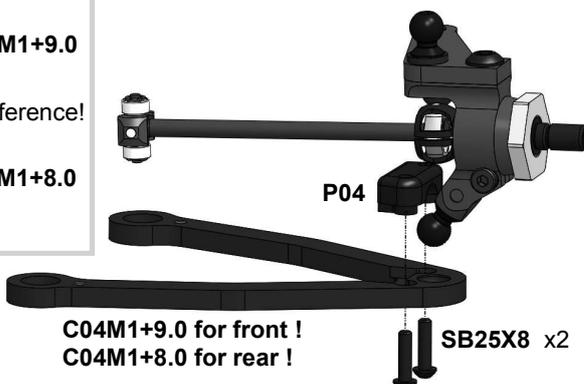

Note:
P04 have the tight fit in the **C04M1+8.0** and **C04M1+9.0** arms.
 Don't overtighten **SB25X8** screws to avoid **ST03** binding.
 Achieve a free action of the ball joint with a minimal backlash.

STEP 5 FINISHED

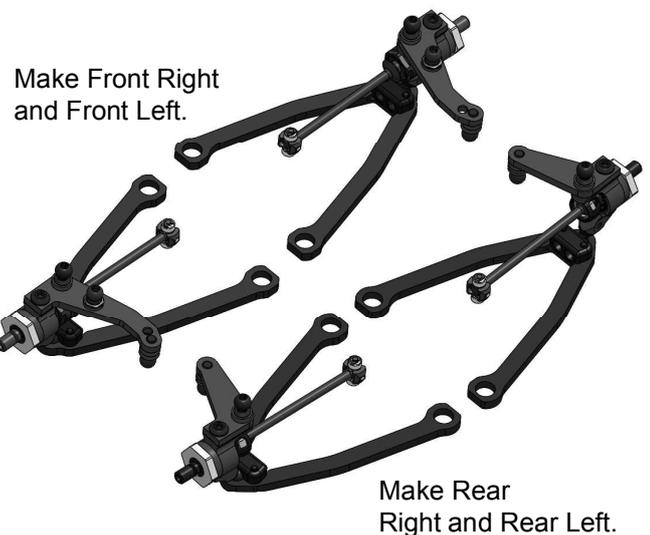


Assembling of the Dampers


Note: We recommend to use 450 cst pure silicone oil for **D2.2-S-P** dampers of this kit.

- 1) Stretch and place **OR18V** O-ring in the groove of the **AT40-1** Cup.
- 2) Insert **P63** Piston into **AT41-2** Vane cavity. Align the outer face of **P63** Piston with the outer edge of **AT41-2** Vane cavity. Keep **AT41-2** in vertical position and add a drop of oil into outer conical hollow of **P63** Piston to fill this hollow fully.
- 3) Stand **AT42-1** Case up and fill ~1/2 of volume with the desirable silicone oil. Insert **AT41-2** Vane into **AT42-1** Case slowly full way down.
- 4) Add more silicone oil. The oil should cover the **AT41-2** Vane completely. It is highly recommended the damper should be placed into a shock air remover. Otherwise let the damper sit for 30m+ to allow air bubbles to escape.
- 5) With the damper still exactly vertical (important!), screw **AT40-1** Cup into the **AT42-1** Case with a 9mm socket wrench until fully threaded. Do not force the **AT40-1** Cup - once aligned, it will screw on easily. The excessive oil should go out through the gap between **AT40-1** and **AT41-2** Vane. Please don't remove this oil from the bearing cavity of **AT40-1** Cup at this stage!
- 6) Place **OR155V** O-ring into **AT40-1** Cup. You can use a piece of an appropriate tube to press o-ring slowly and fully into cavity.
- 7) Place **B85** bearing and one **SH5X7X0.1** shim onto **AT41-2** Vane output shaft.
- 8) Clean up oil off the outer surface of damper.

For disassembling please do all steps in the reverse order.

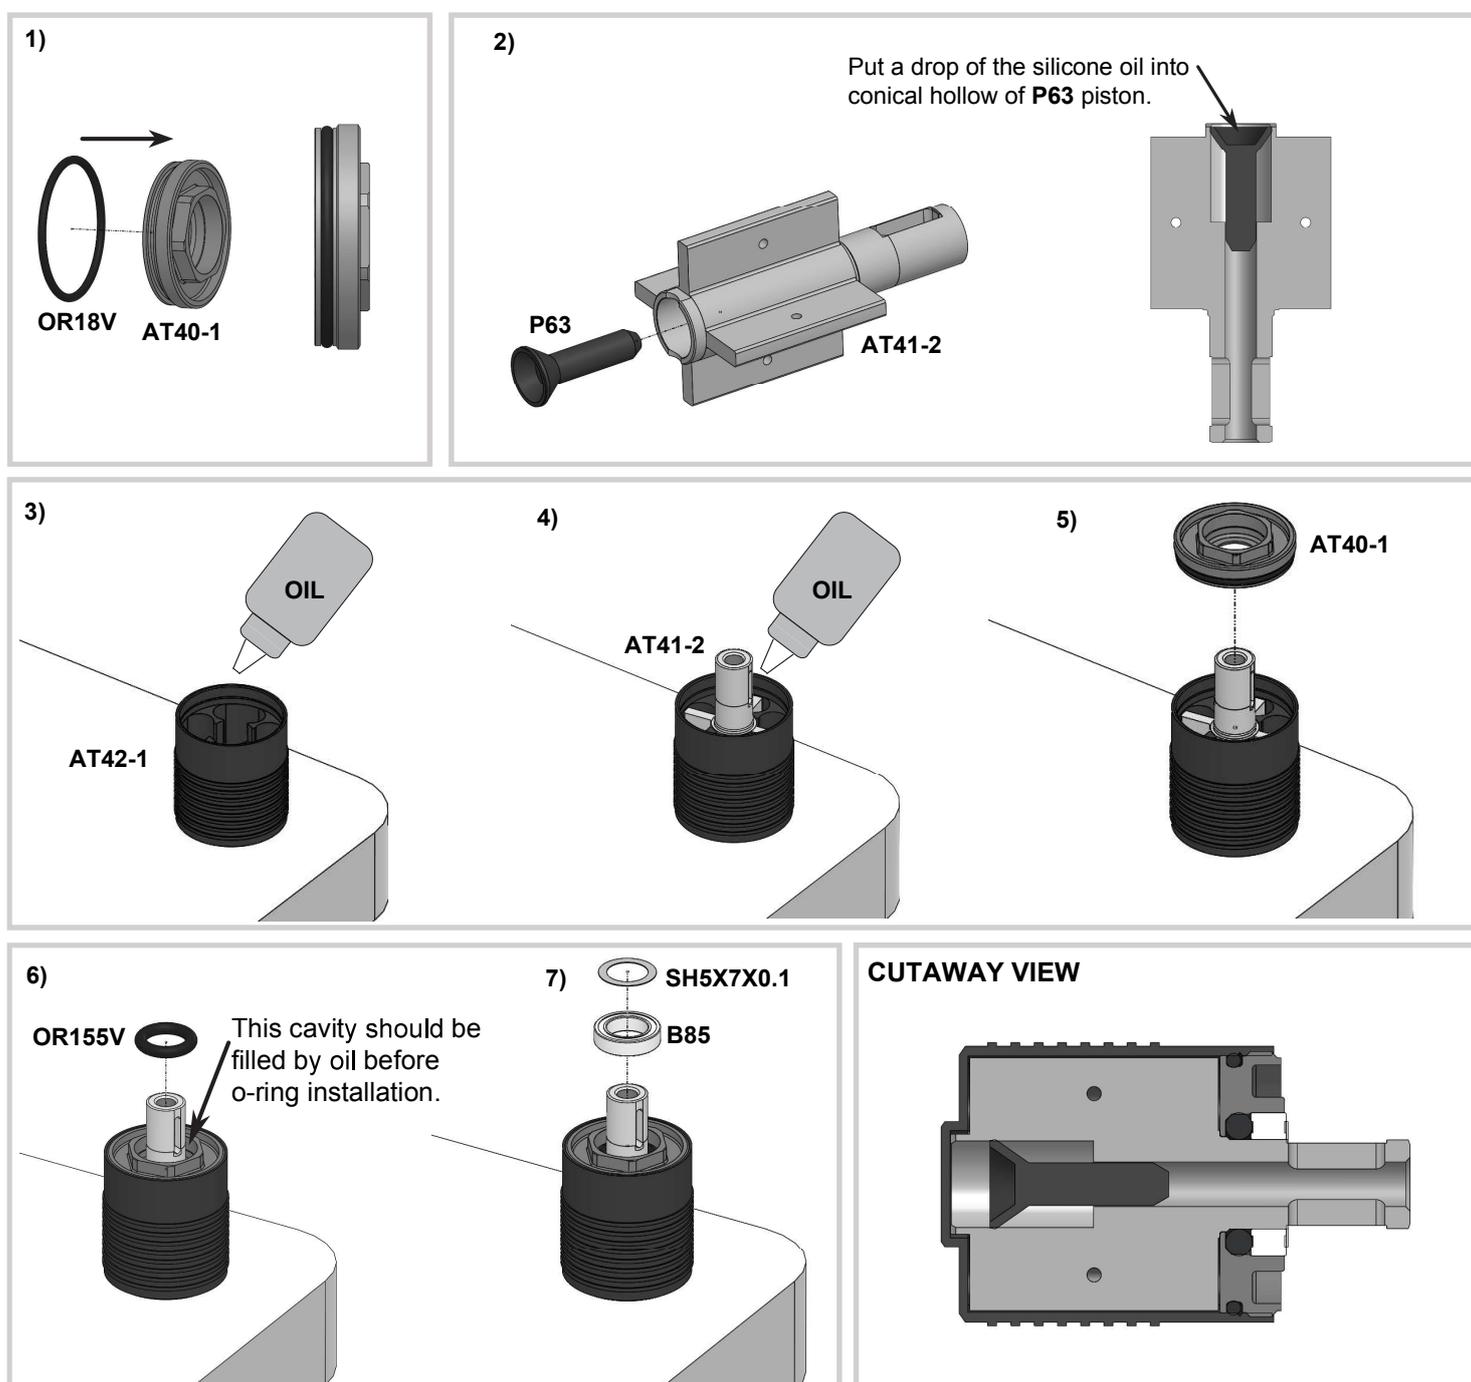

STEP 6

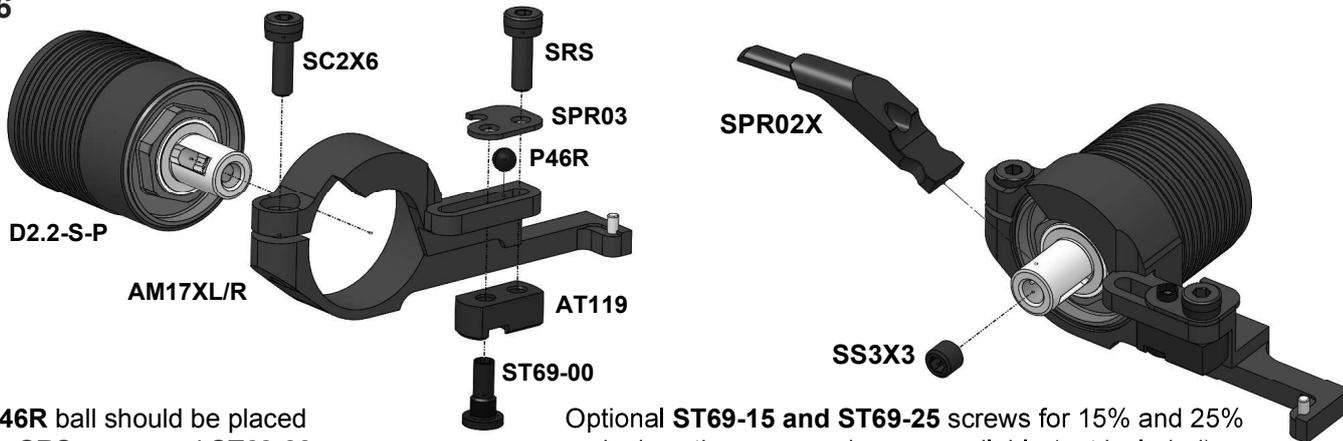



Note: **P46R** ball should be placed between **SRS** screw and **ST69-00** screw.

Optional **ST69-15** and **ST69-25** screws for 15% and 25% spring's action progression are available (not included).

STEP 6 (cont'd)


	SC2X6 M2x6 Cap Head Screw	x4	AM17XR Damper Holder Right	x2
	SRS Spring Rating Screw	x4	AM17XL Damper Holder Left	x2
	SS3X3 Set Screw	x4	D2.2-S-P Damper	x4
	SPR03 Shock Pointer	x4	SPR01 STD Shock Spring	x4
			SPR02X Shock Rod Guide	x4
			ST69-00 Ride Height Screw	x4
			AT119 Spring Screw Holder	x4
			P46R Ball Piston	x4

Attention! After installation of **SPR02X** rotate the complete **D2.2-S-P** damper within **AM17XR/L** until the maximum up travel is reached and secure **SC2X6** screw in the **AM17X/RL** after that. At the max up travel position the **SPR02X** should touch the stopper on **AM17X/RL** !!!

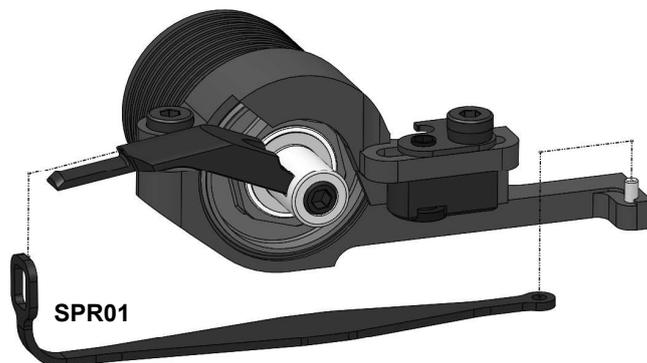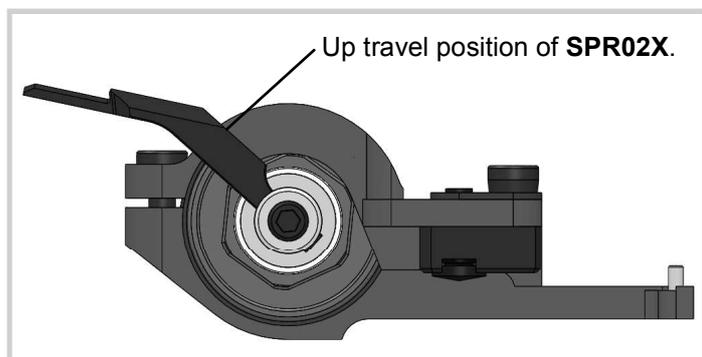

STEPS 6 FINISHED

Assemble 2 Right Shocks and 2 Left Shocks.

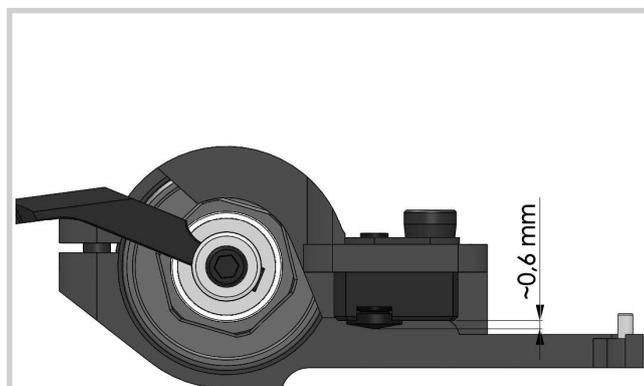


Note: Initial position of **ST69-0** Screw is ~0,6mm.

STEP 7


Note: C01B-X-MM2 Carbon Lower Deck is used in A800MMX kit.
C01B-X-MMA Alloy Lower Deck is used in A800MMXA kit.

Don't tighten **SF3X6** screws under **AT21ST-A** balls at this stage.

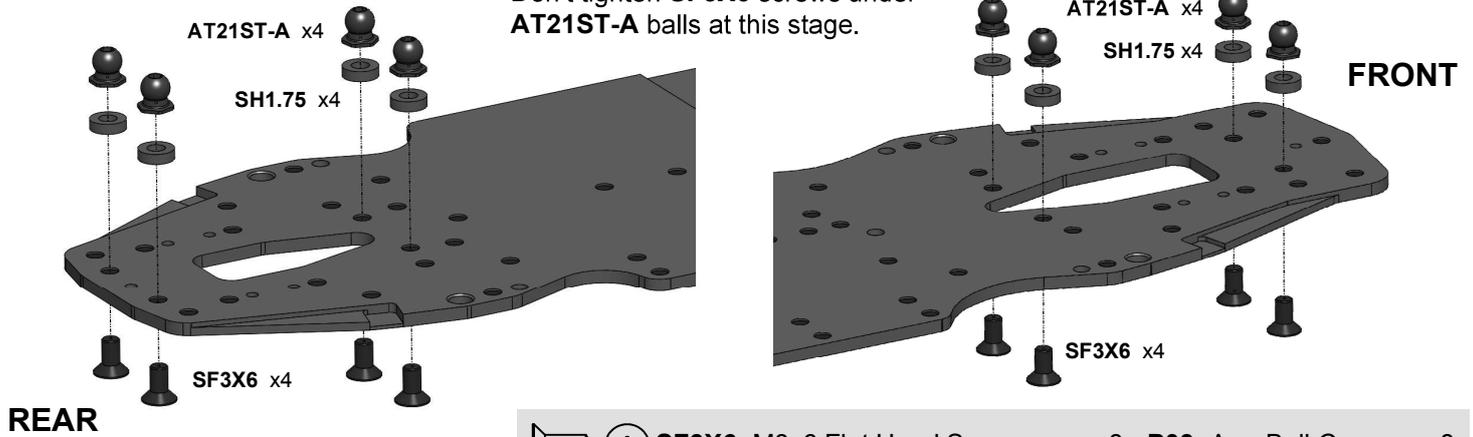

	SF3X6 M3x6 Flat Head Screw	x8	P03 Arm Ball Cap	x8
	SH1.75 6x3x1.75mm Spacer (Black)	x8	AT21ST-A Pivot Ball	x8

STEP 7 FINISHED

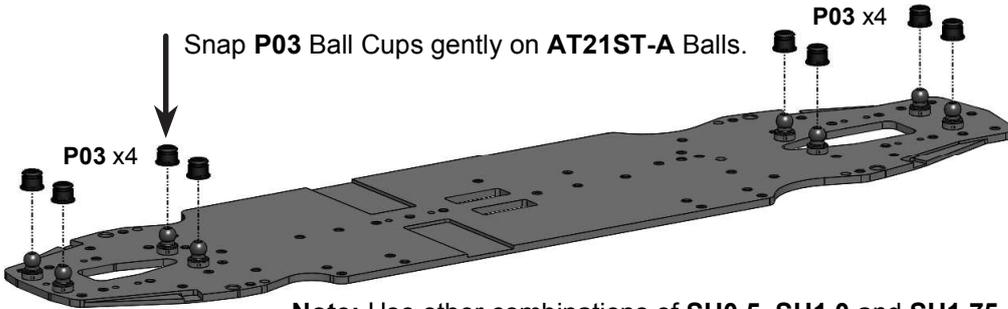

Crimp the **P03** if movement is tight.



Note: Use other combinations of **SH0.5**, **SH1.0** and **SH1.75** spacers under appropriate **AT21ST-A** balls to adjust your car set-up.



STEP 8

Install two **ST24** Ball Studs on two rear **AM78X1** Bulkheads.




	SF3X5 M3x6 Flat Head Screw	x14	ST24 4,8mm Ball Stud	x2
			AM177 Motor Mount	x1
			AM78X1 Bulkhead	x4
			P56 Antenna Holder	x1

SF3X5 screws can be added or removed from the motor mount to alter overall flex, as well as change the flex distribution along the chassis.

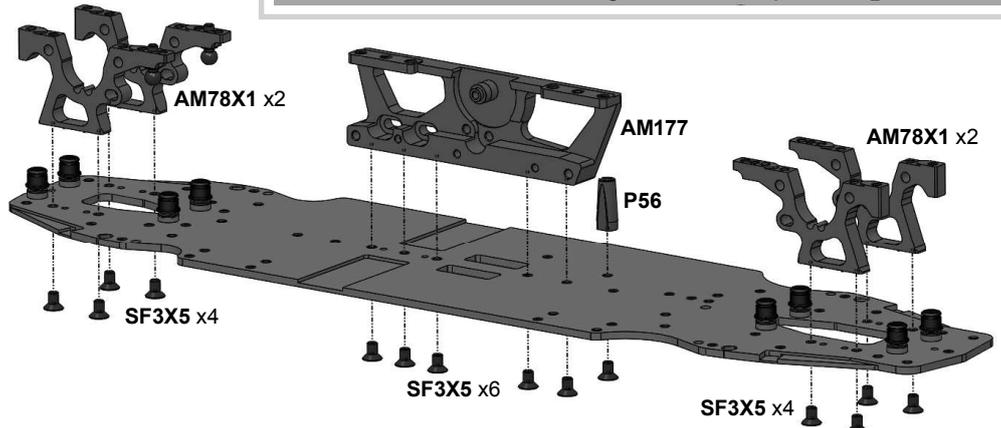
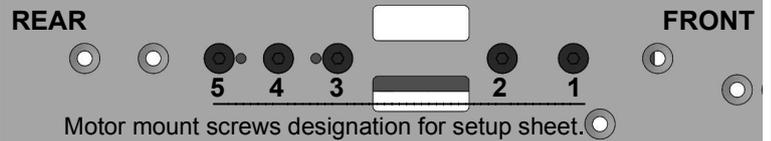


STEP 9

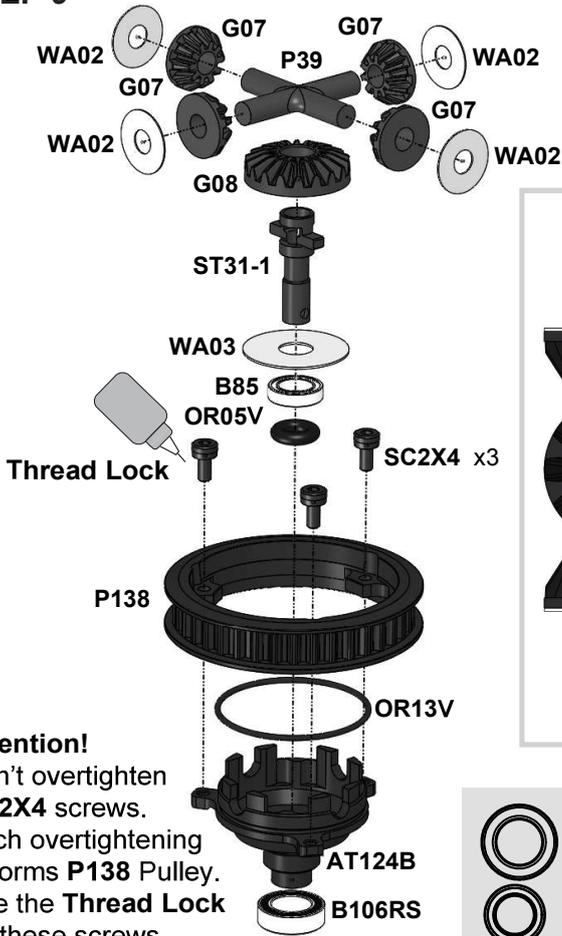

Attention!
Don't overtighten **SC2X4** screws. Such overtightening deforms **P138** Pulley. Use the **Thread Lock** for these screws.


STEP 10

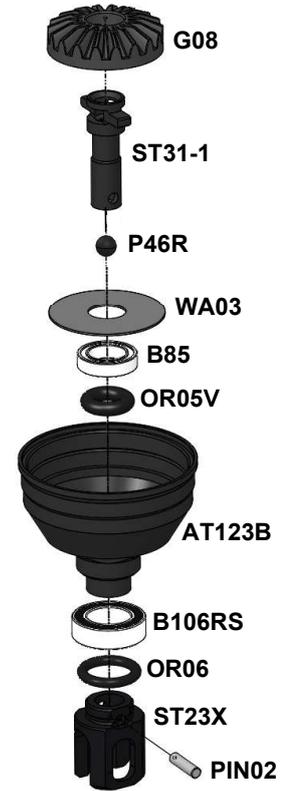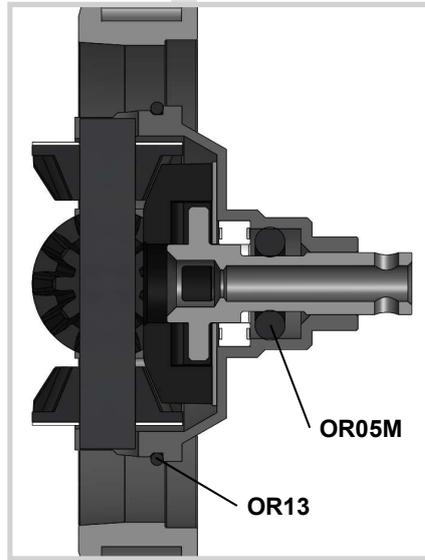

	B106RS	MR106RS Bearing	x2	AT123B	GD2B Case1	x1
	B85	MR85 Bearing	x2	AT124B	GD2B Case2	x1
	OR05V	O-Ring	x2	P138	38T Pulley	x1
	OR06	O-Ring	x2	ST23X	IRJ Outdrive	x2
	P46R	Piston	x2	ST31-1	GD2 Output Axle	x2
	PIN02	1,5x5,8 Pin	x2	P39	GD2 Cross Pin	x1
	SC2X4	M2x4 Cap Head screw	x3	OR13V	13 mm O-Ring	x1
				G07	GD2 Satellite Gear	x4
				G08	GD2 Bevel Gear	x1
				WA02	3.5x9.5x0.2 Washer	x4
				WA03	5x15.5x0.3 Washer	x2


STEP 11

Fill with desirable silicone oil (not included).
Screw **AT123B** GD2B Case with 10mm wrench slowly.
The excessive oil will go out through the **ST31-1** axial hole.

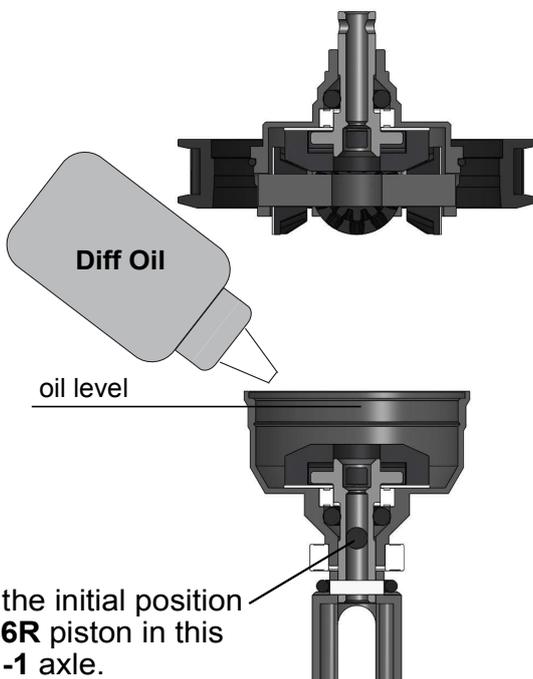


Note the initial position of **P46R** piston in this **ST31-1** axle.

STEP 12

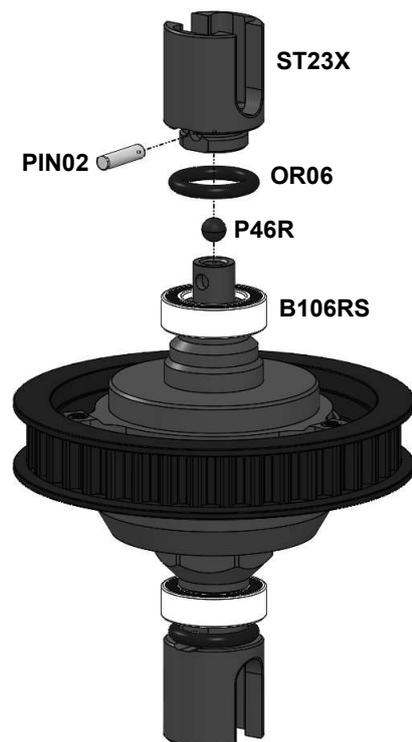


STEP 13

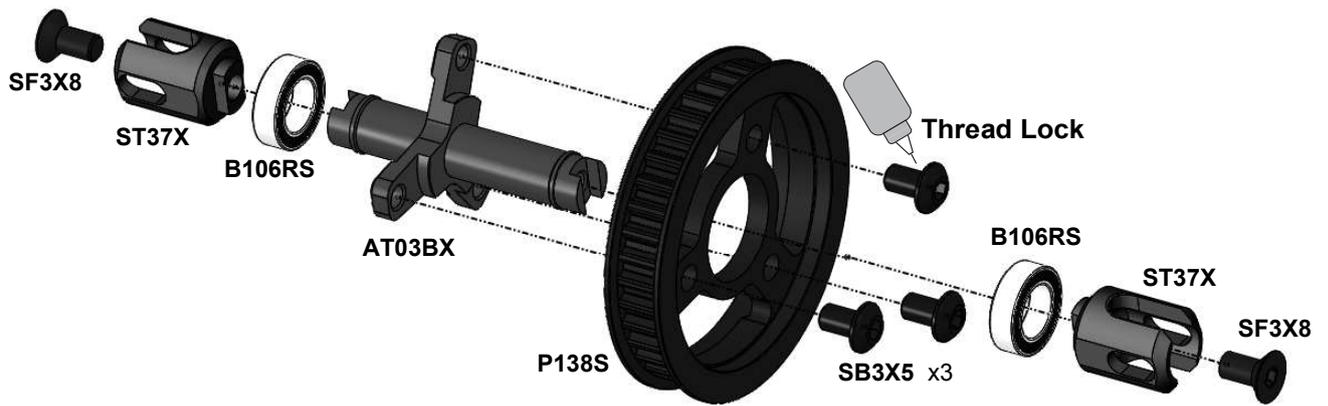

	B106RS MR106RS Bearing	x2	ST37X Spool Outdrive	x2
	SF3X8 M3x8 Flat Head Screw	x2	AT03BX Spool Axle	x1
	SB3X5 M3x5 Button Head Screw	x3	P138S Spool38T Pulley	x1

STEP 13 FINISHED

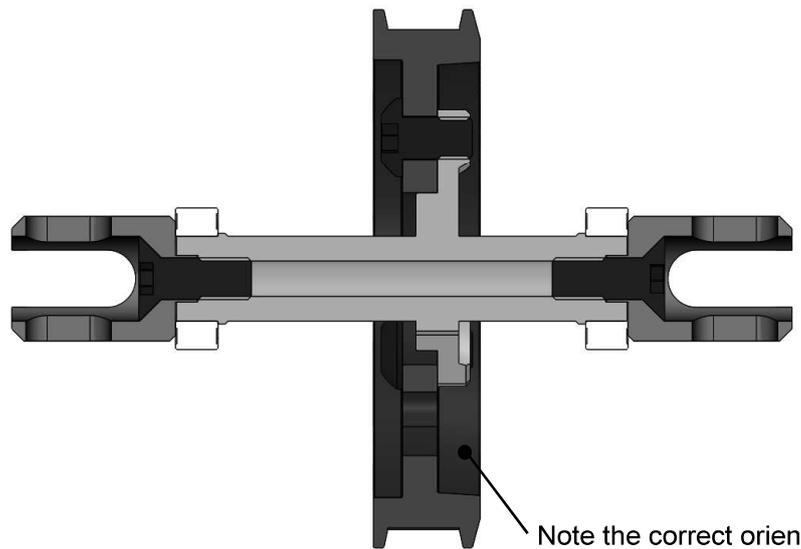


Attention!

Don't overtighten **SB3X5** screws. Such overtightening deforms **P138S** Pulley. Use the **Thread Lock** for these screws.


Note the correct orientation of **AT03BX** Axle regarding to **P138S** Pulley.

STEP 14

P110 Bearing Housing x4

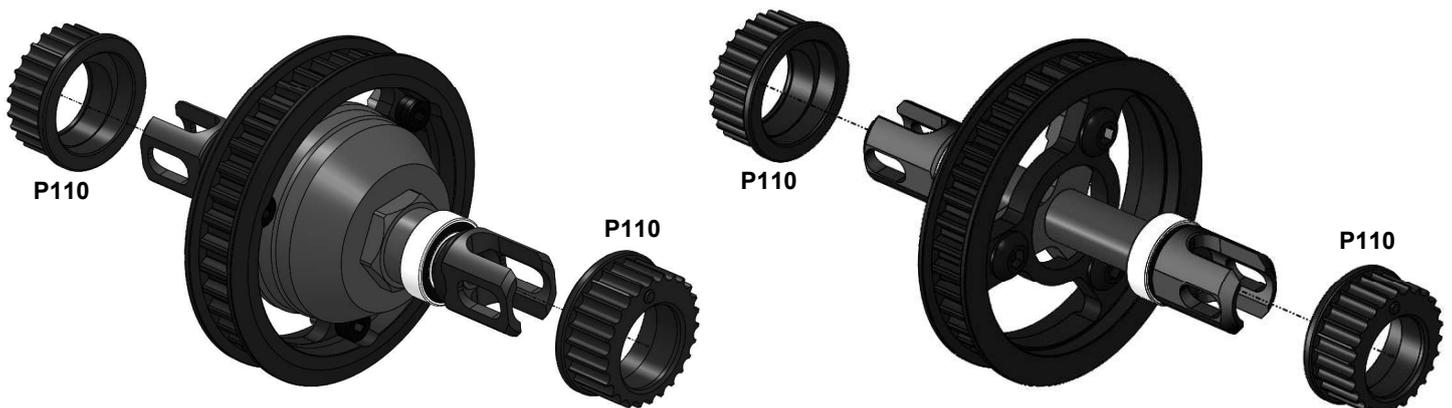


STEP 15

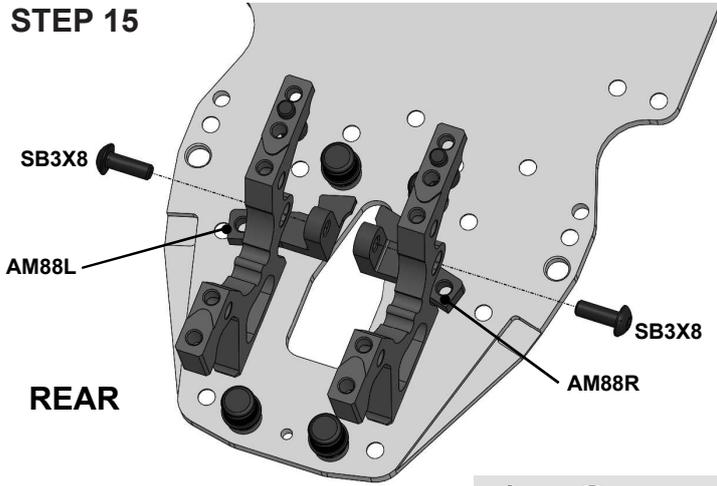

STEP 16

Attention! Note orientation of this chamfer on DT22.

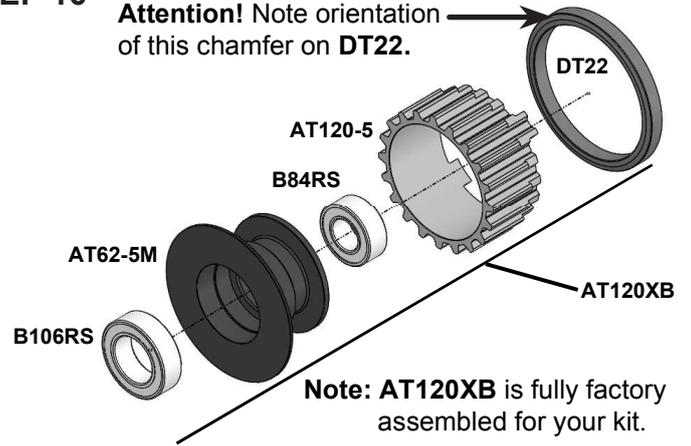


Note: AT120XB is fully factory assembled for your kit.





Attention!
Don't tighten **SB3X8** screws on this stage.

		SB3X5 M3x5 Button Head Screw	x8	AM88R Shock Holder R	x1
		SB25X8 M2.5x8 Button Head Screw	x1	AM88L Shock Holder R	x1
		SB3X8 M3x8 Button Head Screw	x2	AT120XB 20T Alloy Pulley	x1
				AM19-FX Upper Arm Holder	x4
				BEL351B Belt 351 mm	x2


STEP 17

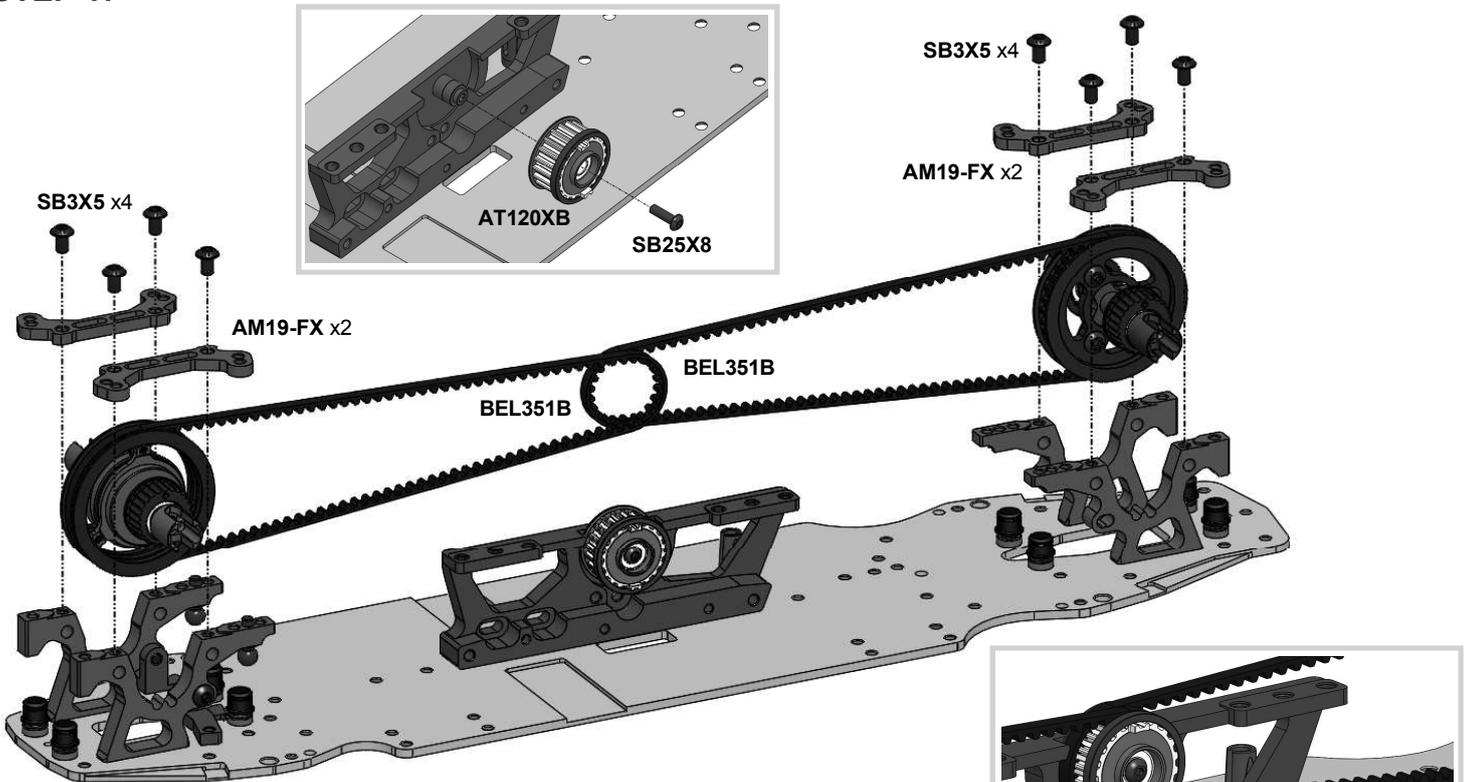


	B73SS Ball bearing	x2
	SH0.5 6x3x0.5mm Spacer (Silver)	x2
	ST59 LS2 Long Screw	x1

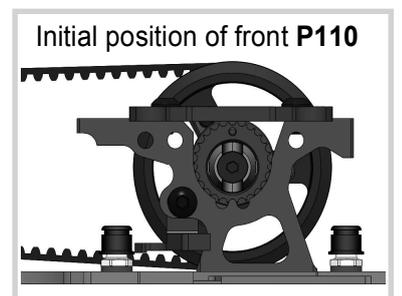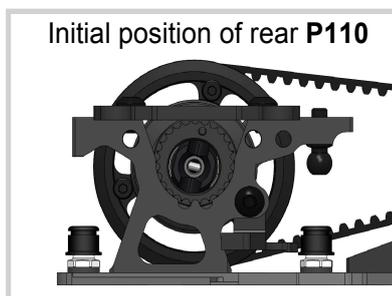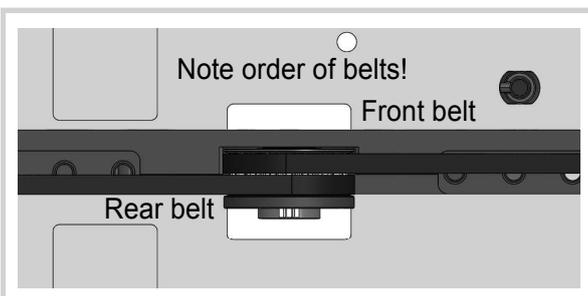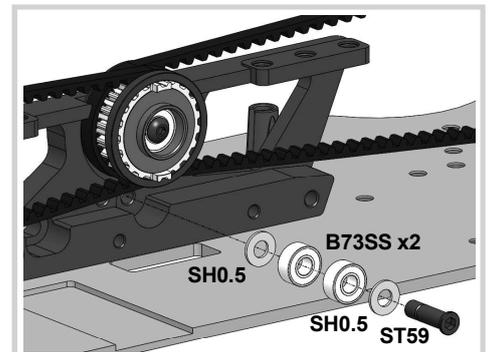

STEP 18

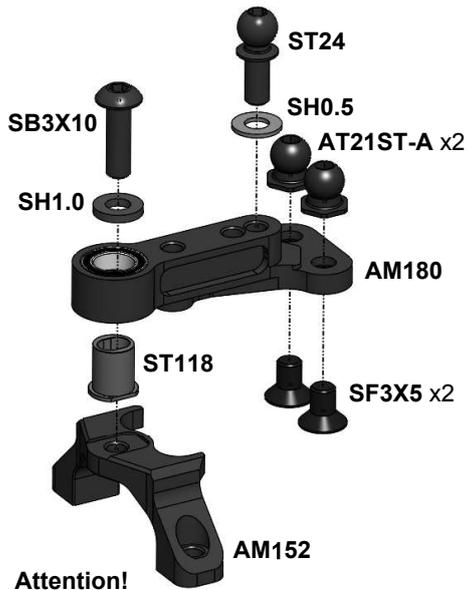


Attention!
If your kit is equipped with the **AM180EVO** Bellcrank you have to use **1.5mm** shims in total under **ST24** to have enough clearance!

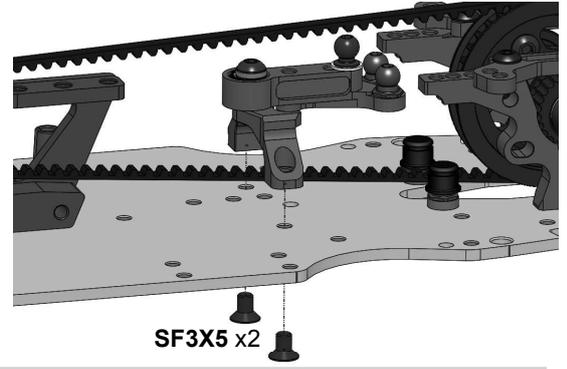


	SFX5 M3x5 Flay Head Screw	x4	AM180 SB Bellcrank	x1
	SB3X10 M3x10 Button Head Screw	x1	AM152 SB Stand	
	SF3X10 M3x10 Flat Head Screw	x4	ST118 SB Bellcrank Axle	x1
	SH0.5 6x3x0.5mm Spacer (Silver)	x1	ST24 4,8x6mm Ball Stud	x1
	SH1.0 6x3x1mm Spacer (Gray)	x1	AT21ST-A Pivot Ball	x2


STEP 19

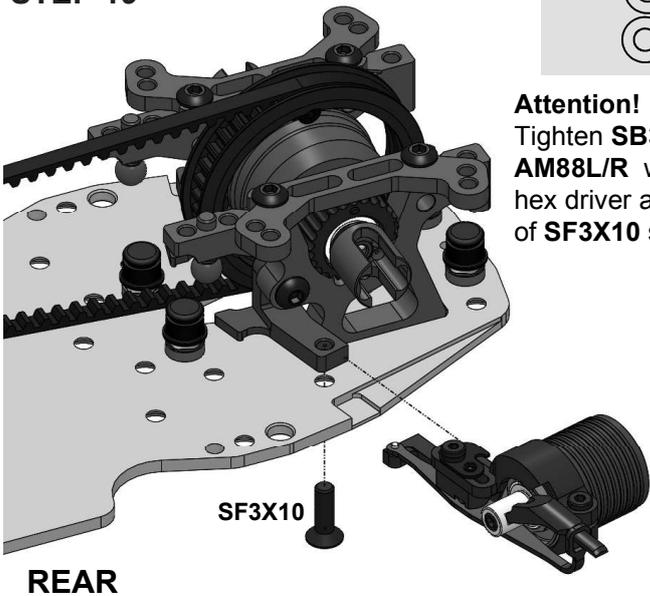


Attention!
Tighten **SB3X8** screws of **AM88L/R** with 2mm ball hex driver after tightening of **SF3X10** screws.

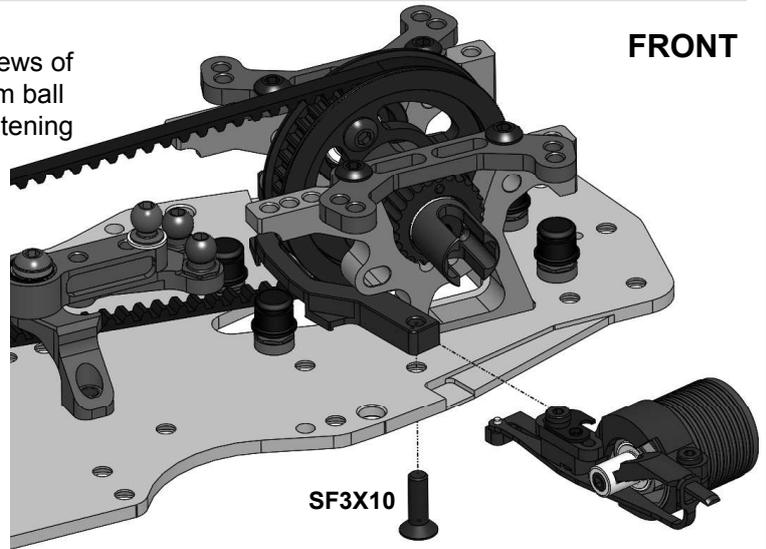


STEP 19 FINISHED

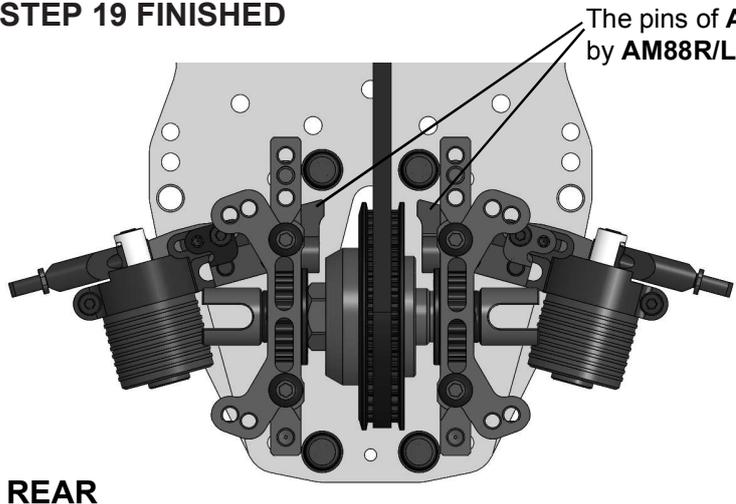


The pins of **AM17** should be covered by **AM88R/L** Shock Holders.

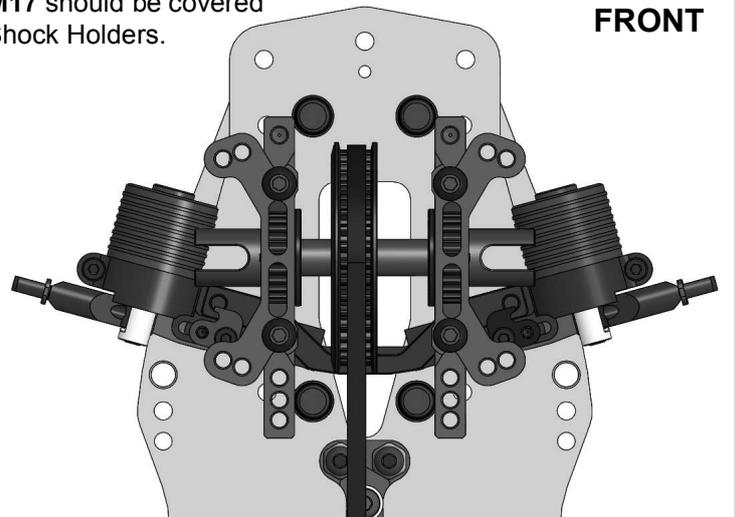

STEP 20 Note: C127S Top Decks are used in A800MMXA kit.
C127 Top Decks are used in A800MMX kit.

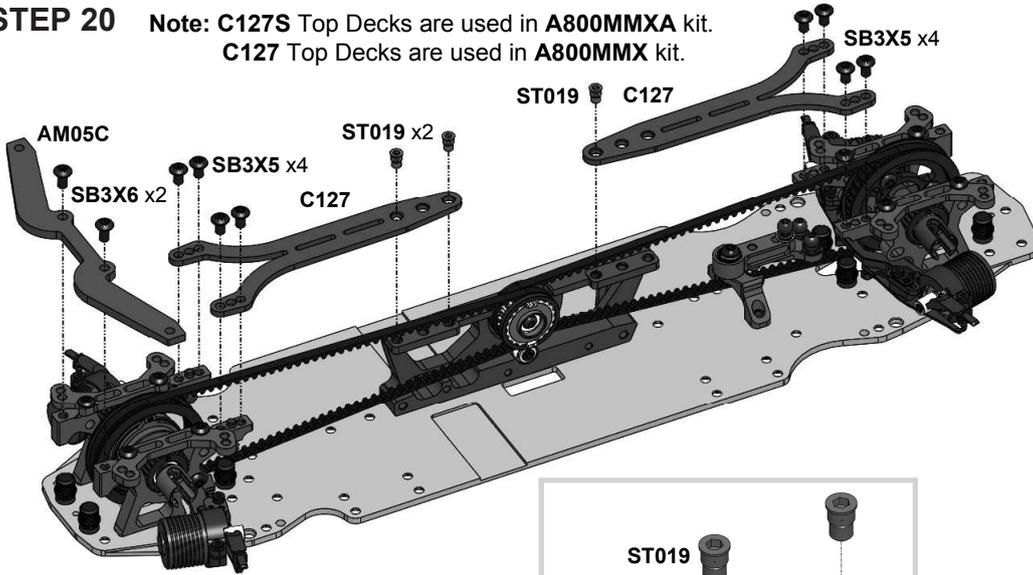


- C127 Top Deck x2
- AM05C Rear Holder x1


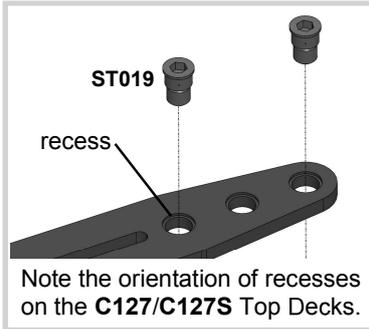


Note the orientation of recesses on the C127/C127S Top Decks.

- SB3X5 M3x5 Button Head Screw x8
- SB3X6 M3x6 Button Head Screw x2
- ST019 Top Deck Screw x3

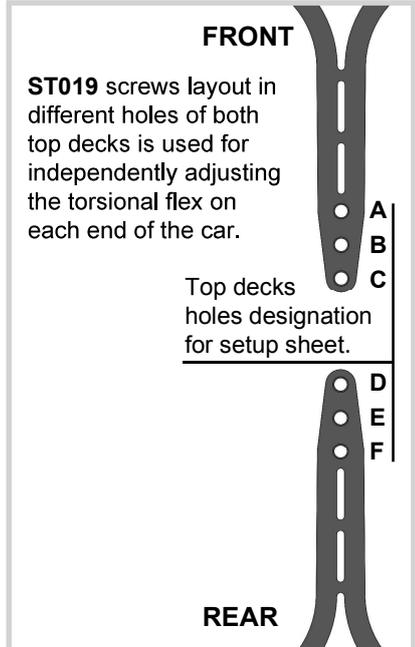


STEP 21

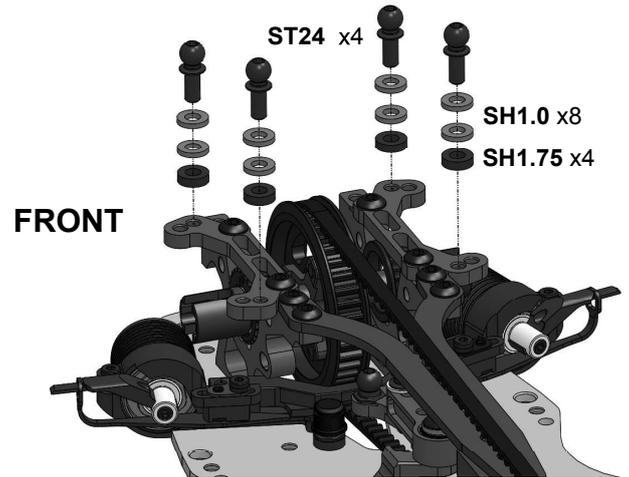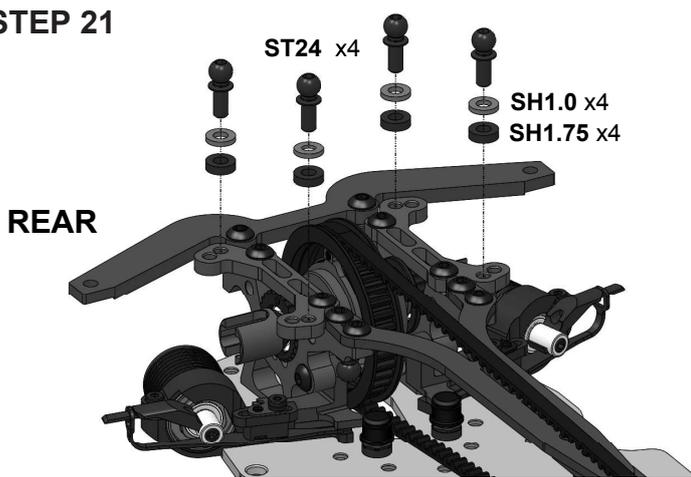


- SH1.0 6x3x1mm Spacer (Gray) x12
- SH1.75 6x3x1.75mm Spacer (Black) x8
- ST24 4,8x6mm Ball Stud x8

STEP 22

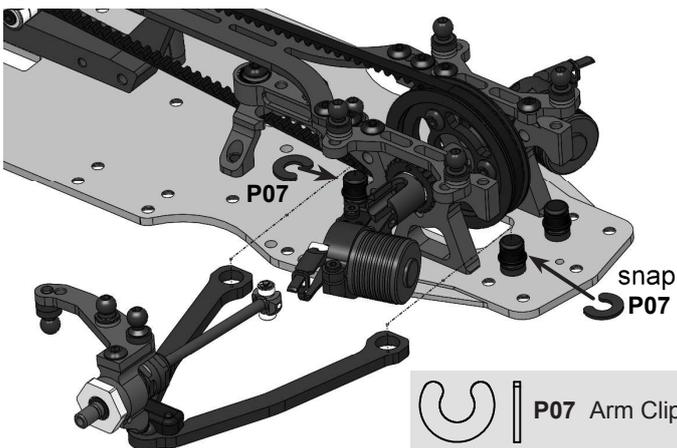


- P07 Arm Clip x8

STEP 22 FINISHED

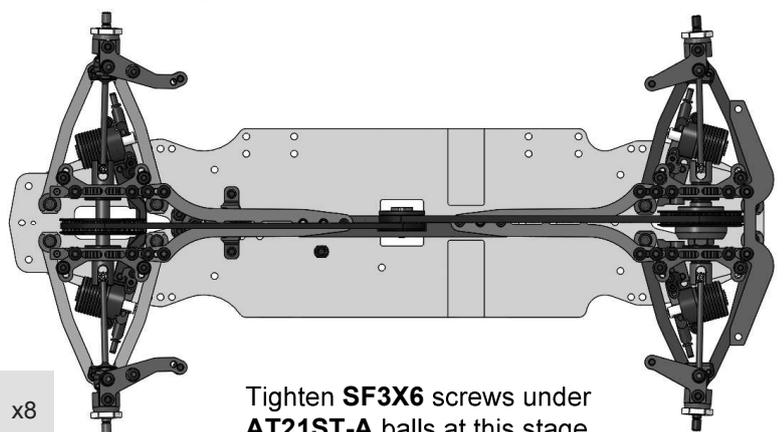


Tighten SF3X6 screws under AT21ST-A balls at this stage.

STEP 23


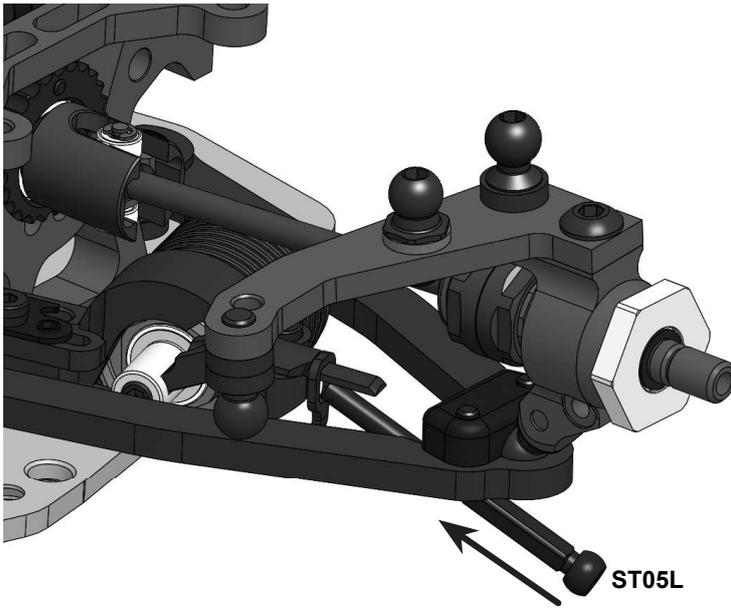


STEP 23 FINISHED

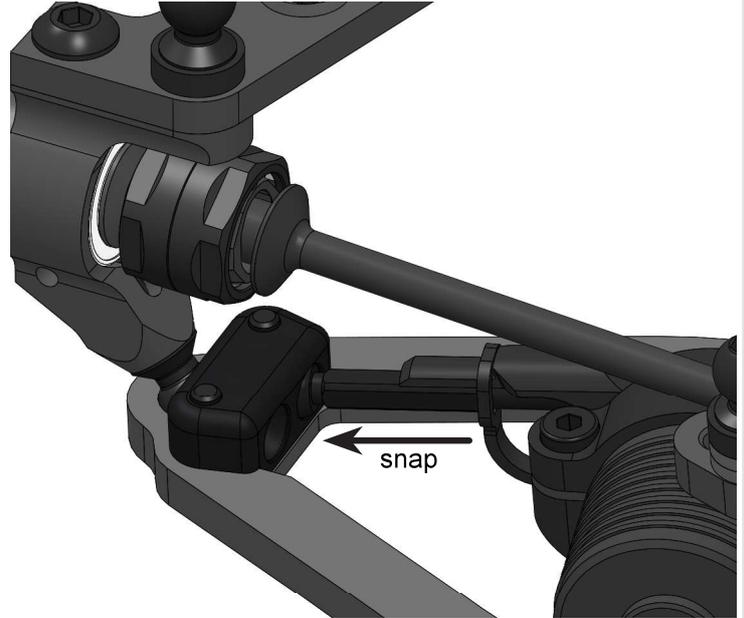


ST05L Shock Rod x4

STEP 24

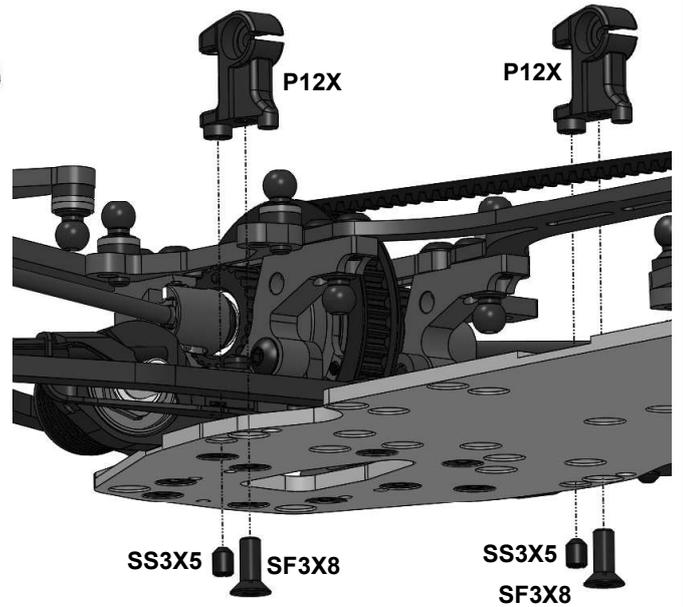
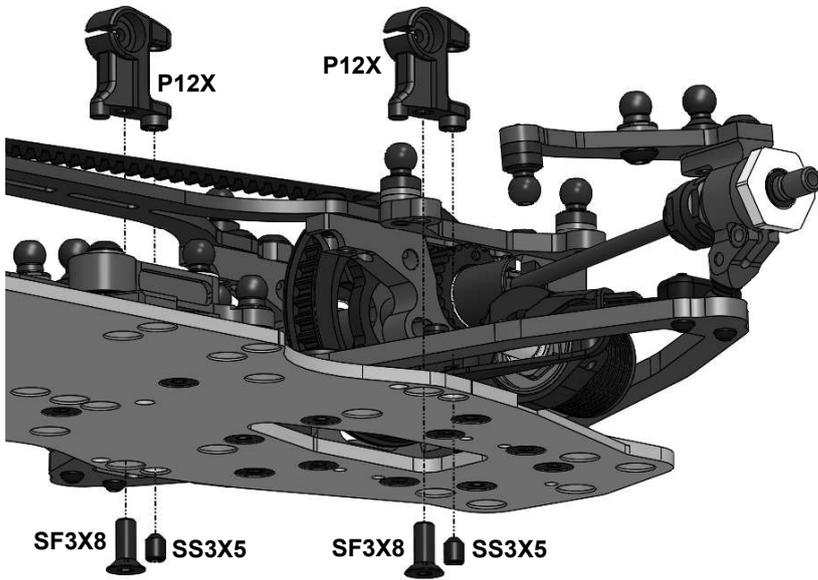


-   SF3X8 M3x8 Flat head Screw x4
-   SS3X5 M3x5 Set Screw x4
-  P12X Sway Bar Holder x4


STEP 26

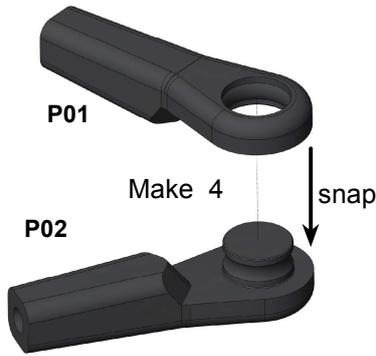


Servo rod for long servo link layout

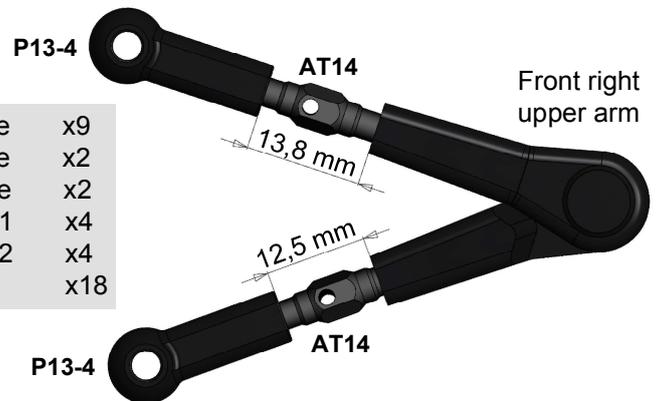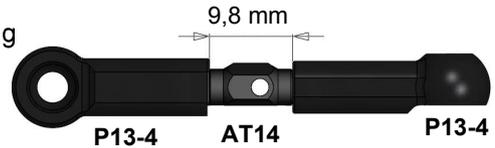

AT14	Turnbuckle	x9
AT25	Turnbuckle	x2
AT25-44	Turnbuckle	x2
P01	Ball Joint 1	x4
P02	Ball Joint 2	x4
P13-4	Ball End	x18

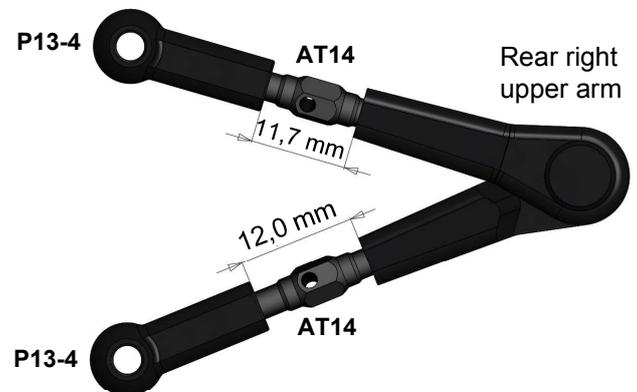



Notes: The given rods and arms sizes are approximately for 4° front caster and 0° rear caster, 2° both front and rear cambers, 3,0° rear toe-in and 1° front toe out angles. Use a setup station or angles gauge for further precise suspension geometry setting. See our recommendations on page #23 for quick and easy suspension geometry change.

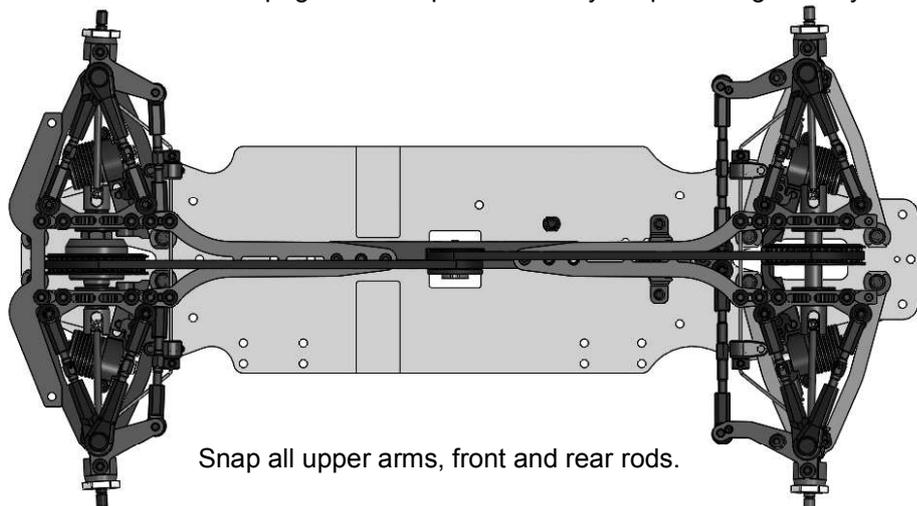

Snap all upper arms, front and rear rods.

STEP 27

Note: Use the appropriate combination of SH spacers for sufficient gap between battery and P25 Clamps.

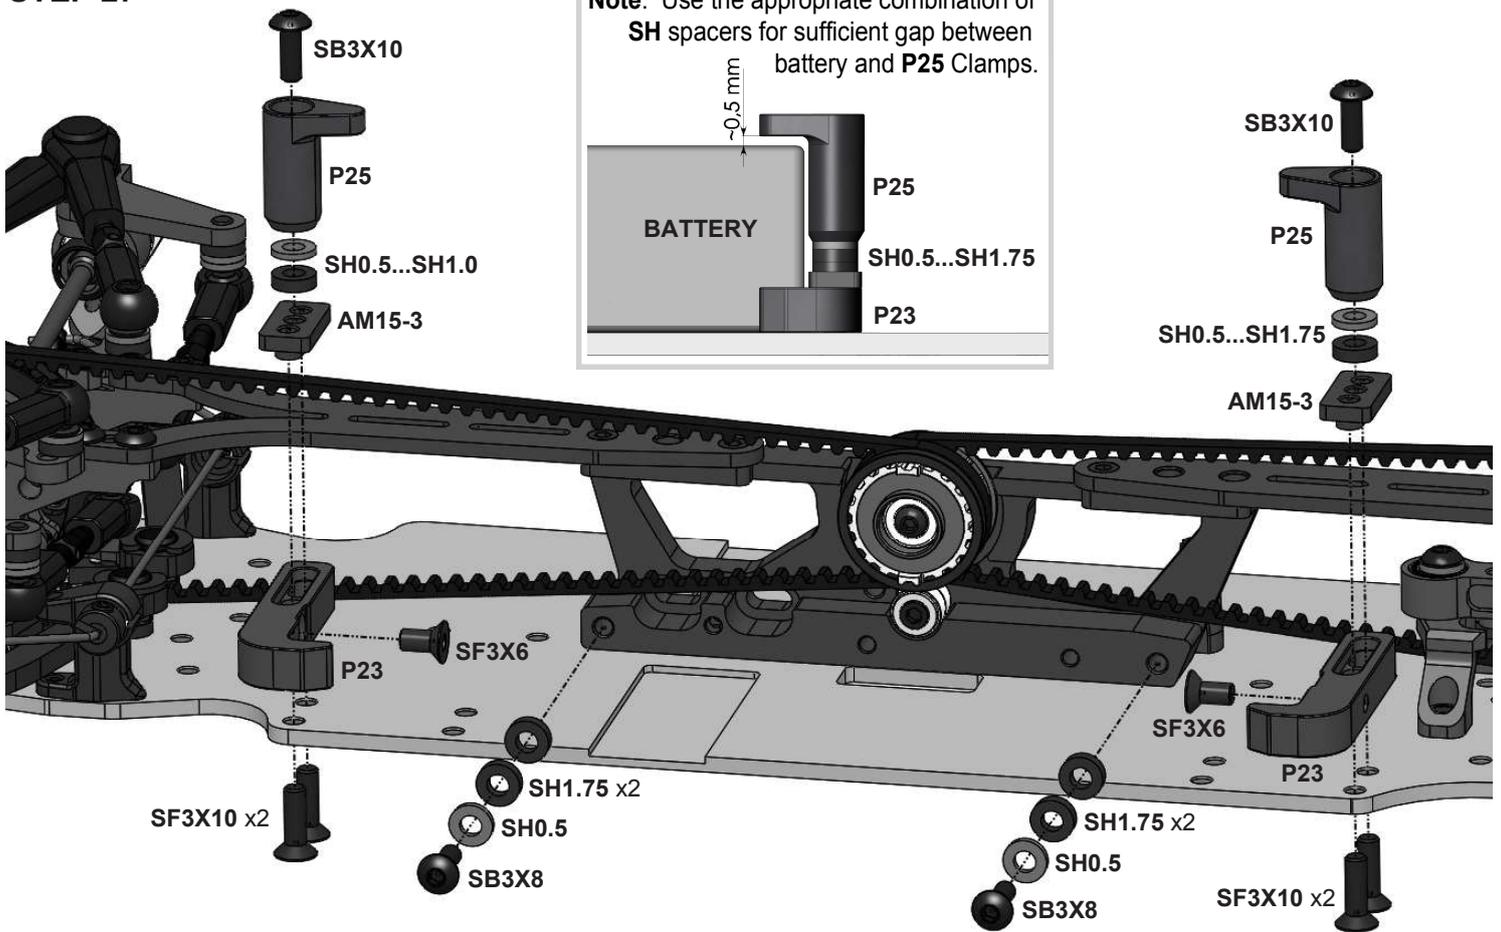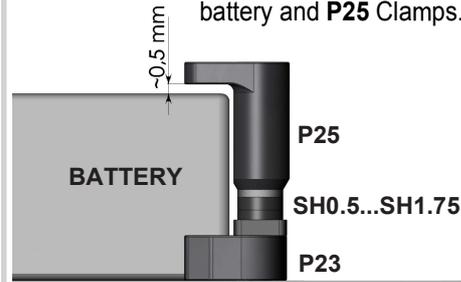

Battery Holders adjustment:

Choose the desirable battery position.

Tighten up **SF3X10** screws to fix

P23 Battery Holders.


Adjust **SF3X6** screws to achieve ~0.5mm clearance between them and the battery.

		SF3X10 M3x10 Flat Head Screw	x4	P23 Outer Battery Holder	x2
		SF3X6 M3x6 Flat Head Screw	x2	P25 Battery Clamp	x2
		SB3X10 M3x10 Button Head Screw	x2	AM15-3 Battery Nut	x2
		SB3X8 M3x8 Button Head Screw	x2	SH0.5 SH1.0 SH1.75 Spacers	


ST110 and **ST105** Round Weights should be used for adjusting of the final weight and the weight distribution of the car.

By screwing in the **ST110** and **ST105** with chamfered side down almost all influence of the round weights to the chassis flex is removed.

ST110 or **ST105**

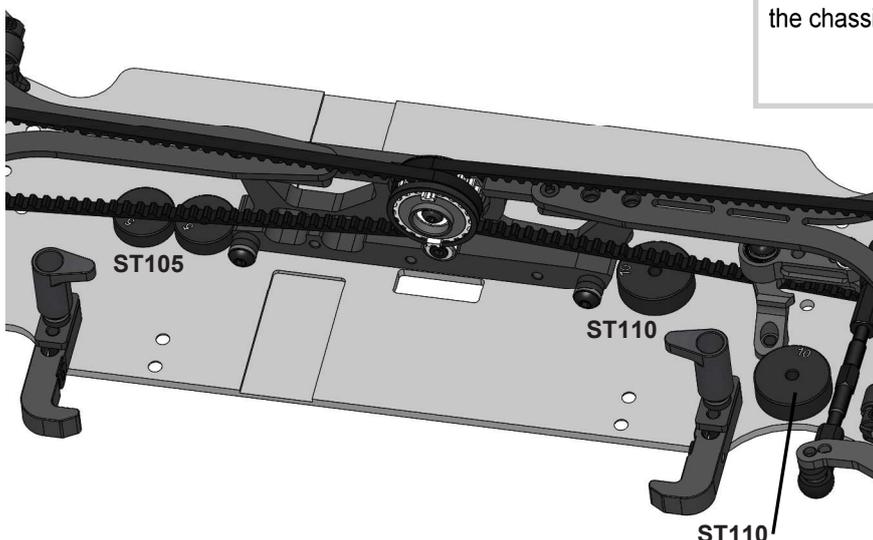

The engraved sides of **ST110** and **ST105** are flat. The opposite sides are chamfered.





ST110 10g Round Weight



ST105 5g Round Weight

STEP28

Servo and Servo Horn (not included)

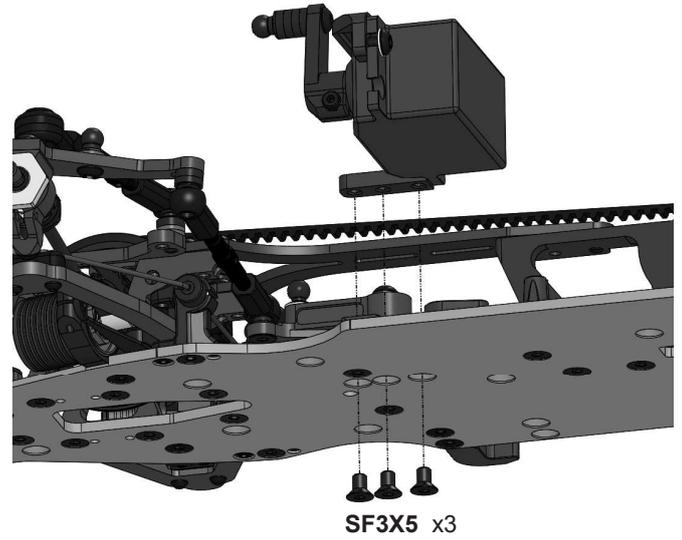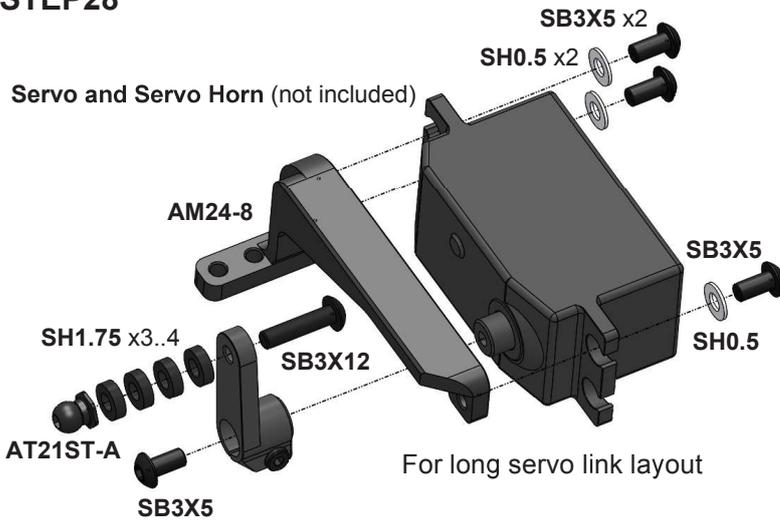


- SB3X12** M3x12 Button Head Screw x1
- SF3X5** M3x5 Flat Head Screw x3
- SB3X5** M3x5 Button Head Screw x4
- SH0.5** 6x3x0.5mm Spacer (Silver) x3
- SH1.75** 6x3x1.75mm Spacer (Black) x4
- AT21ST-A** Pivot Ball x1
- AM24-8** Servo Holder x1






Note: Recommended length of the servo horn at the long servo link layout is 16,5-17,5 mm.
Recommended length of the servo horn at the short servo link layout is ~15 mm.


Attention! Neutral servo arm position at long servo link layout.

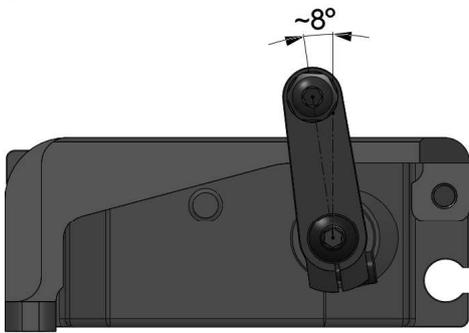


Long servo link layout

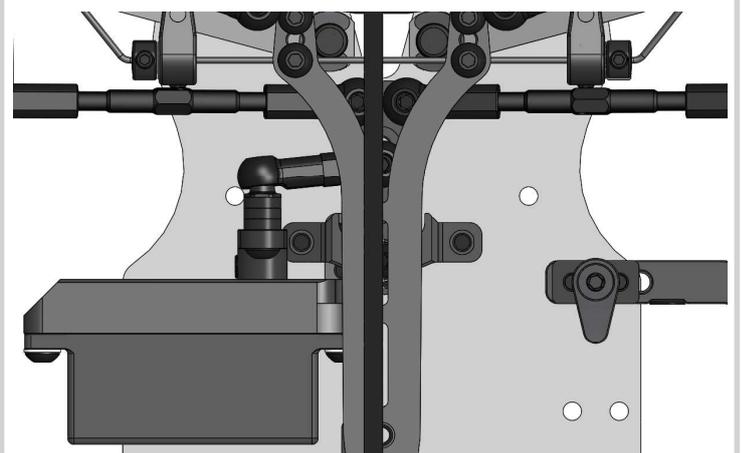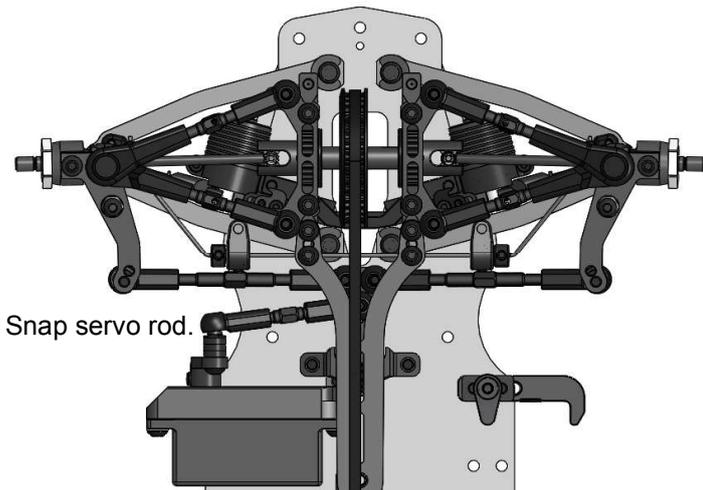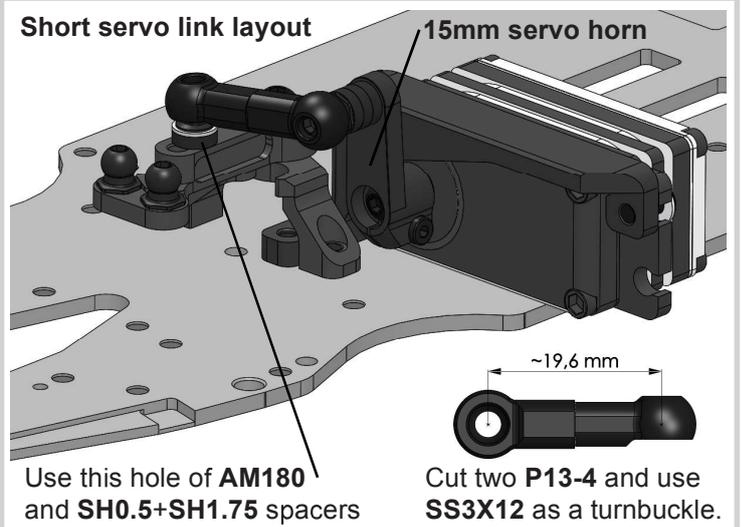

STEP 29



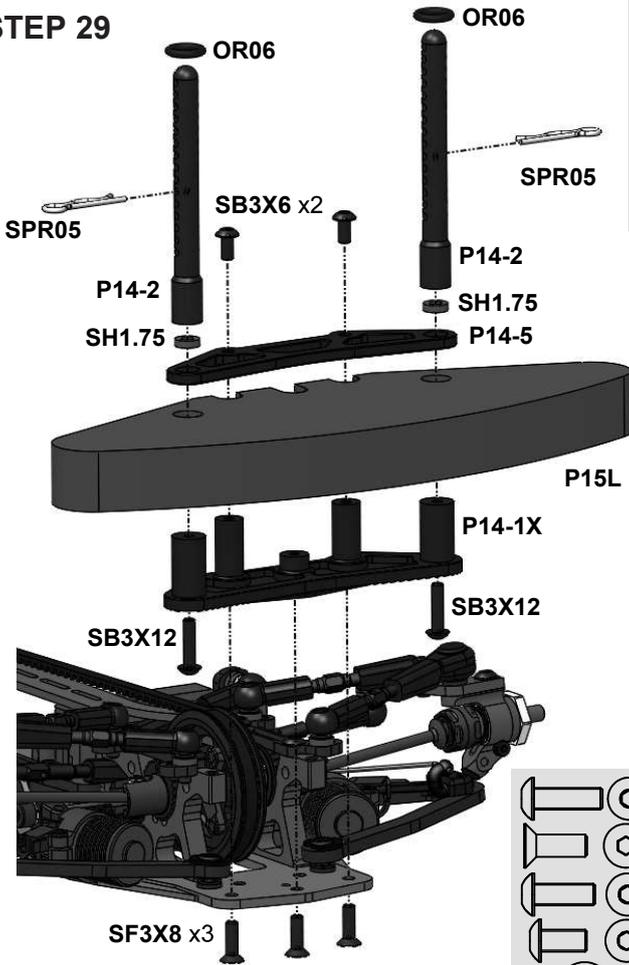


Attention!
Make two round cutouts at the P14-1X backside to create enough clearance to the suspension arm mounts.

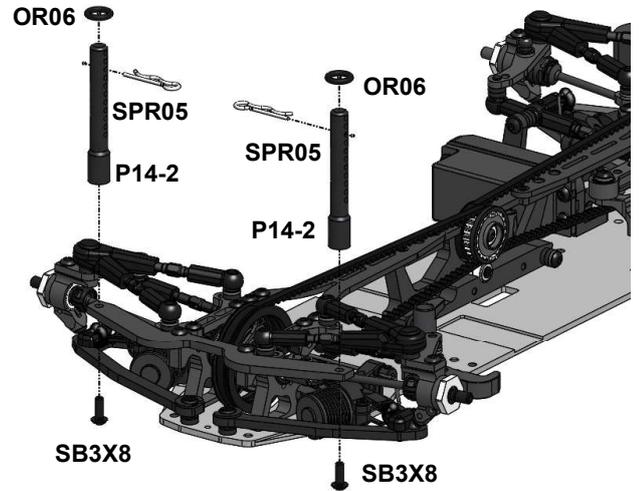


- | | | | | | |
|--|--|---------------------------------------|----|----------------------------|----|
| | | SB3X12 M3x12 Button Head Screw | x2 | P14-1X Lower Bumper | x1 |
| | | SF3X8 M3x8 Flat Head Screw | x3 | P14-2 Body Post | x4 |
| | | SB3X8 M3x8 Button Head Screw | x2 | P14-5 Upper Bumper | x1 |
| | | SB3X6 M3x6 Button Head Screw | x2 | P15L Foam Bumper | x1 |
| | | OR06 5mm O-Ring | x4 | SPR05 Body Clip | x4 |

STEP 30

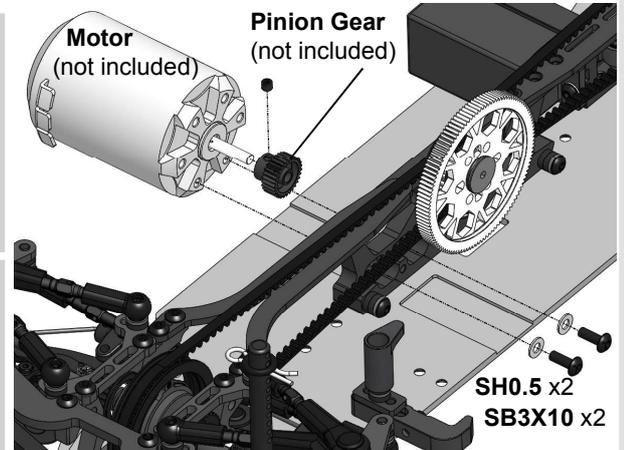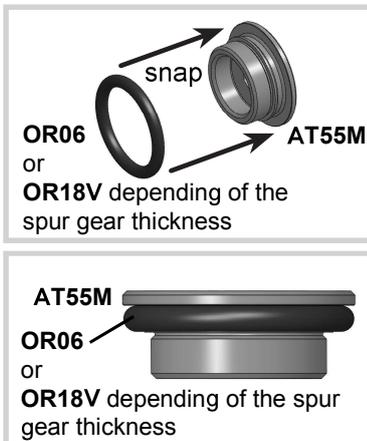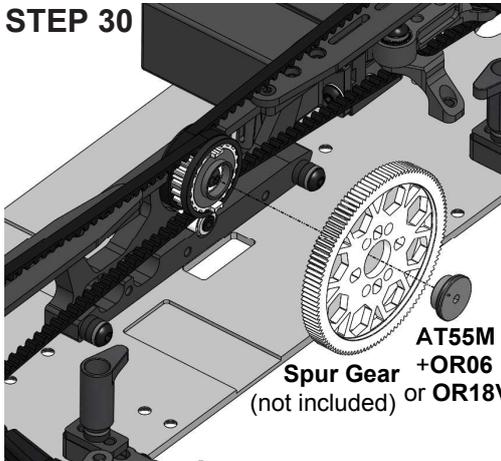

STEP 31 FINAL ASSEMBLY


Install:
Speed controller (not included),
Receiver (not included),
Battery (not included)
Wheels (not included)

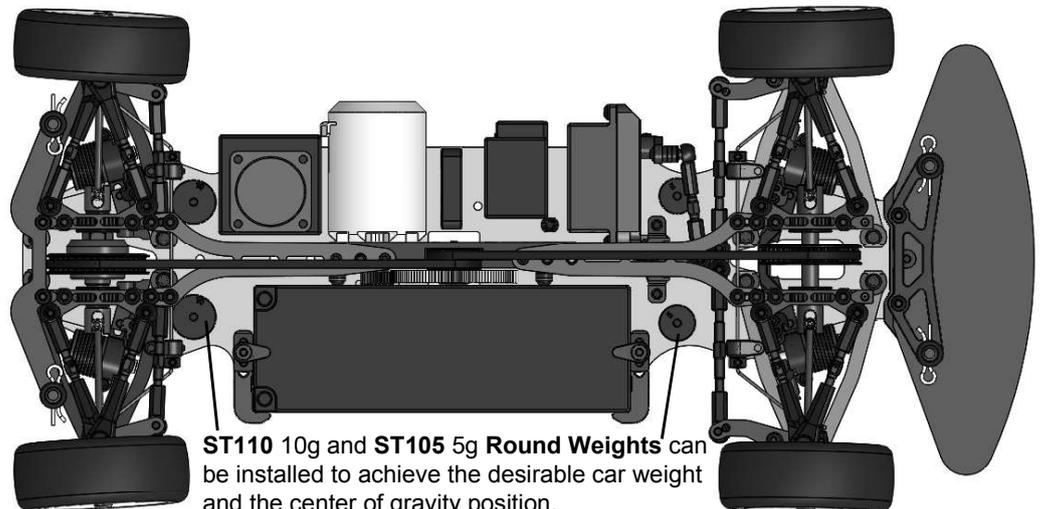


ST110 10g and ST105 5g Round Weights can be installed to achieve the desirable car weight and the center of gravity position.

AT22M Rear Body Holder

Use the extra clipped P14-2 bars for additional support of body's tail.

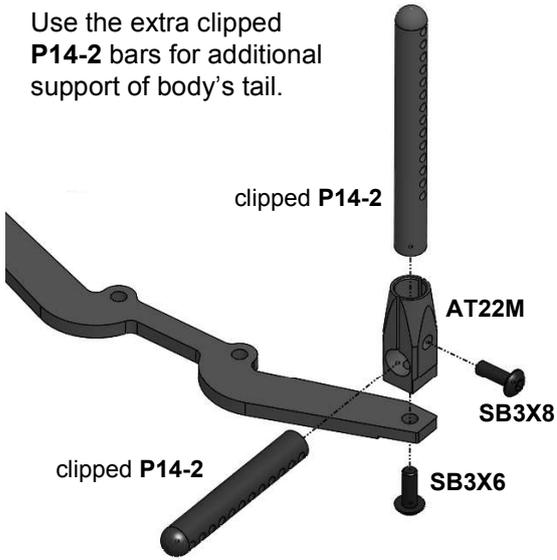


HRB Horizontal Rear Bodypost Set

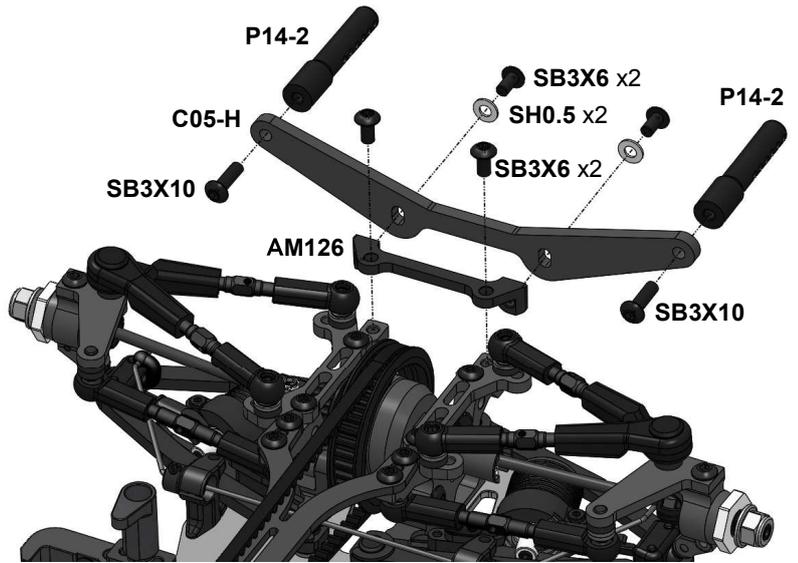


AM105, AM105H Stiffener


SF3X5 screw layout affects the car's rear end flex.

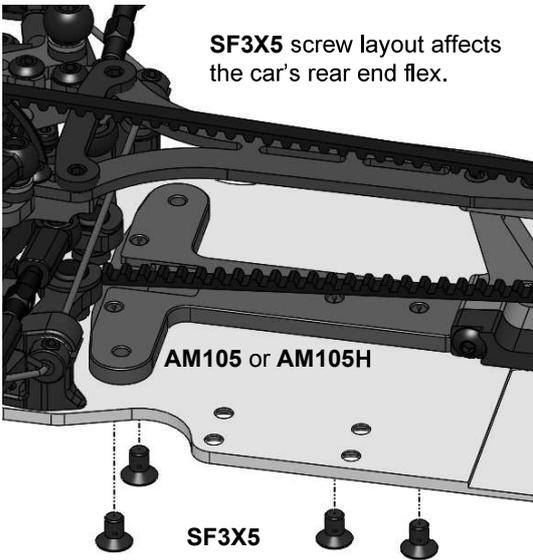


AT139 Fan Holder

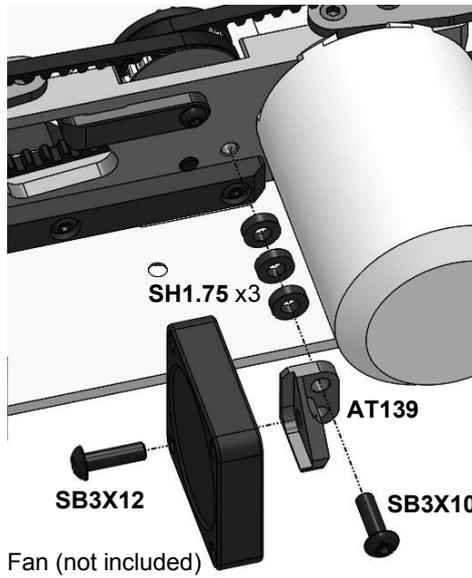


C26 Top Stiffener

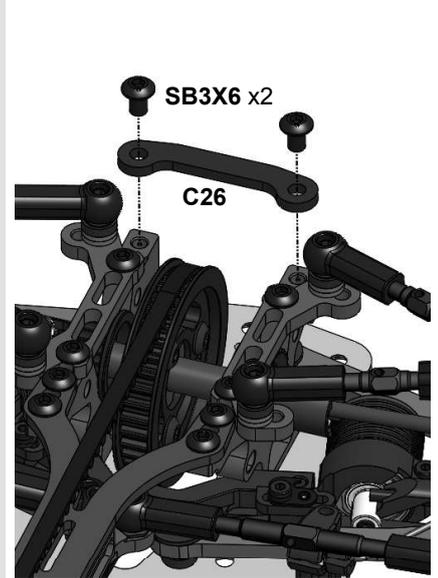


BW7, BW8, BW10 Weights

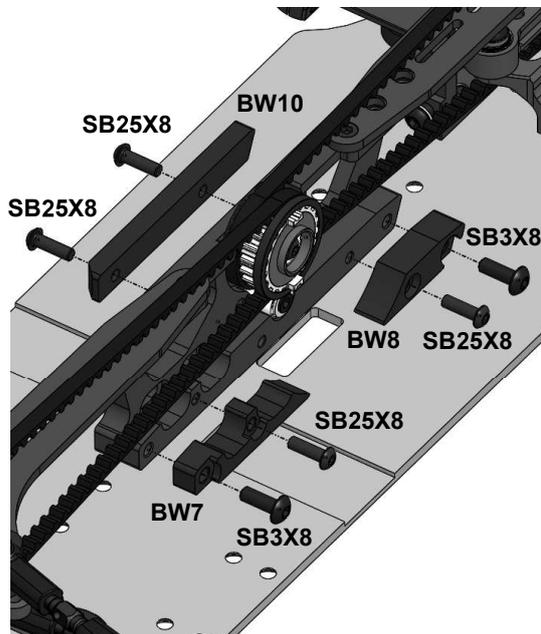

AM111 Belt Anti Skip

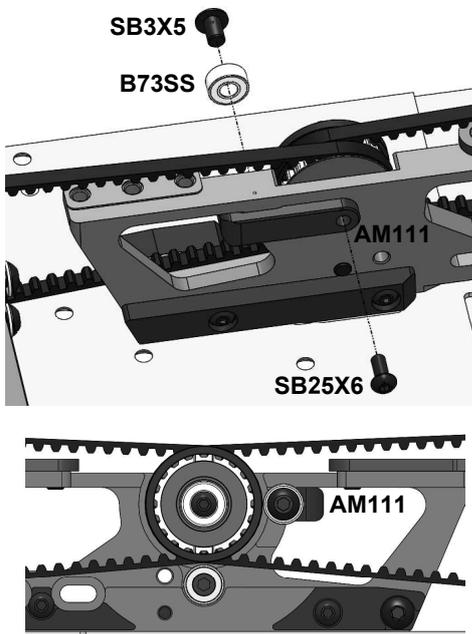


BC1 Battery Clamp Set AM12X, AT144

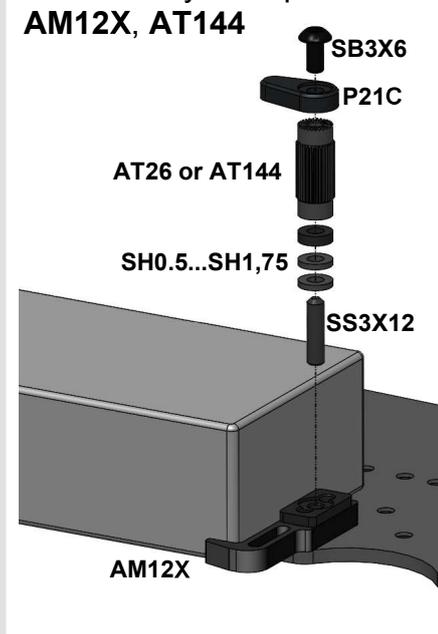


SUSPENSION SETTING TECHNIQUE

Camber adjustment rule: Simultaneous both upper rods 0.5mm shortening (1/2 turn of both turnbuckles) adds 1.0° of camber angle at constant caster.

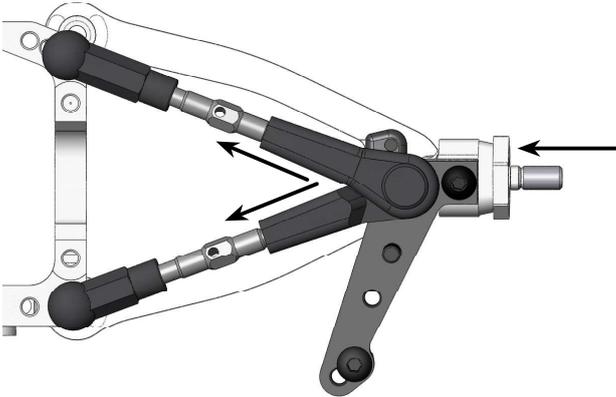


Caster adjustment rule: Simultaneous front upper rod 0.5mm elongation and rear upper rod 0.5mm shortening adds 2.5° of caster at constant camber.

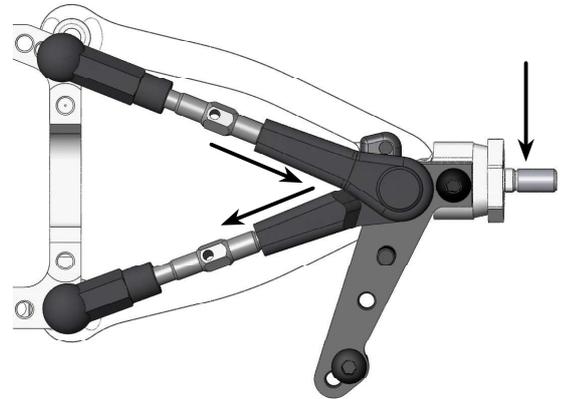


Caster measuring:

Caster angle° =
 $(H1-H2)*1.5$ for front
 $(H1-H2)*2.2$ for rear

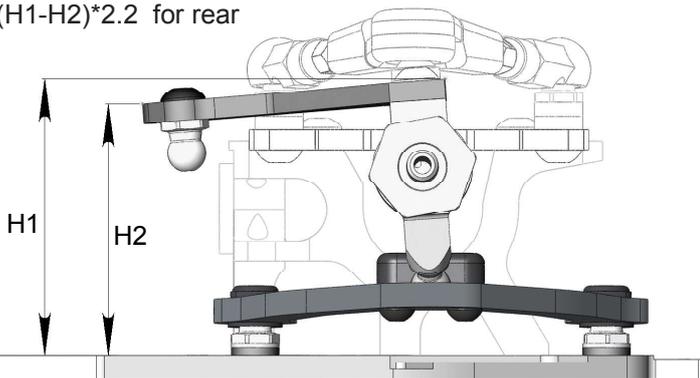


Reactive Caster setting is possible.

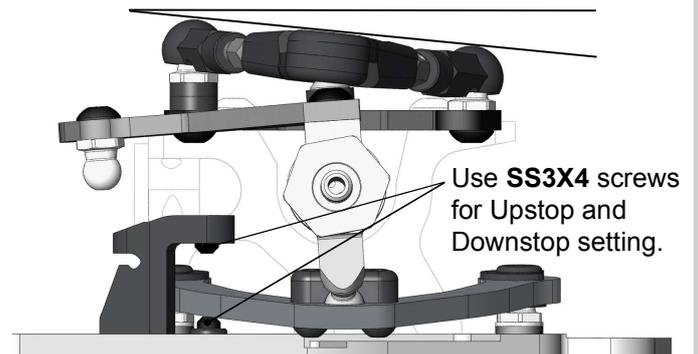

Roll Center adjustment:


Use combinations of **SH0.5**, **SH1.0** and **SH1.75** Spacers under appropriate Pivot Balls and Ball Studs for this adjustment.

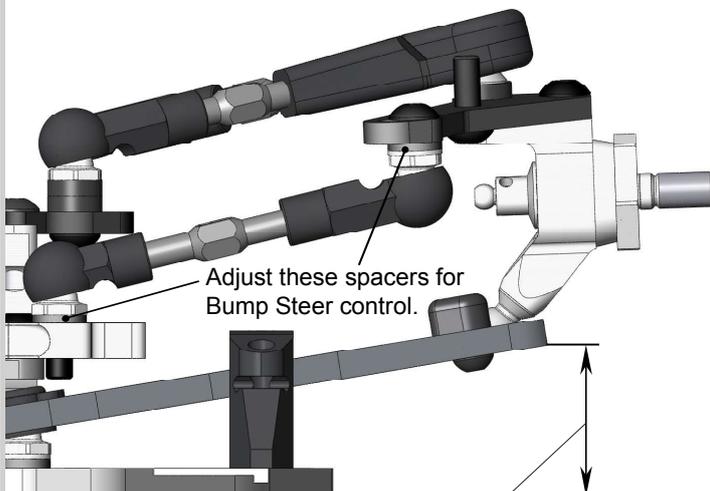

Use Ride Height Gauge for Upstop & Downstop measuring.

Wheelbase adjustment:

Use rear suspension caster change for this adjustment. Adding 4°caster shortens wheelbase by 1mm.

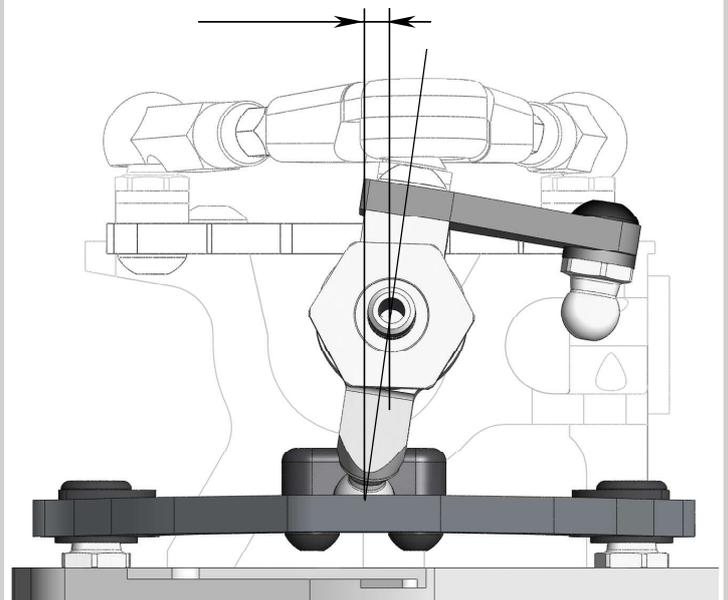

SHOCK SETTING TECHNIQUE

Attention! These Shocks allow to adjust the Damping and Spring rates without replacement of the shock's fluid and spring.

1. Damping and Shock Spring rate setting

Increase **A**-distance (slide Shock outward) to increase Damping and Spring rates simultaneously and concordantly to each other. **A**-distance range is 0 - 4.0mm.

Use **SF3X10** Screw to unlock Shock and to lock it at the desirable position.

Decrease **B** distance (slide **AT119** Spring Screw Holder outward) to increase Spring rate at the fixed Damping rate value.

Use **SRS** (Spring Rating Screw) to unlock **AT119** Spring Screw Holder and to lock it at the desirable position.

2. Shock Spring preload setting


Spring preload and the ride height of the car is adjusting via **RHS** (Ride Height Screw).

Attention! In this kit **ST69-00** screw is used as **RHS** screw.

Turn IN (CW) **RHS** screw to increase spring preload.


Turn OUT (CCW) **RHS** screw to decrease spring preload.

Use spring preload setting to adjust ride height value.

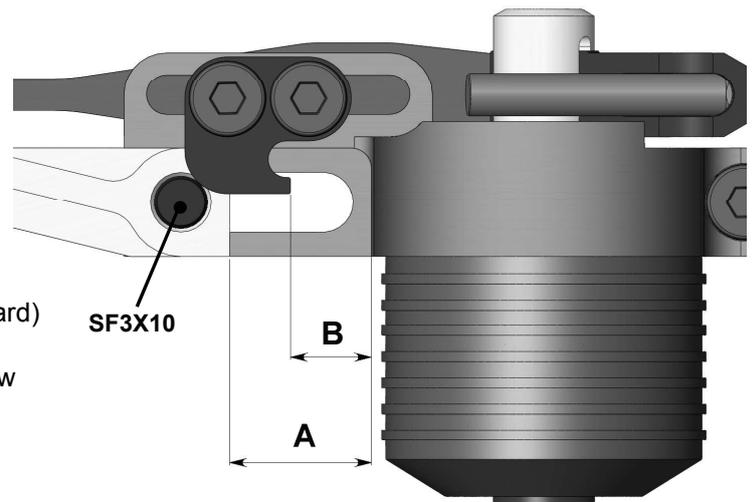


3. SRS/RHS Screws arrangements change

The reverse arrangement of these screws is possible also.


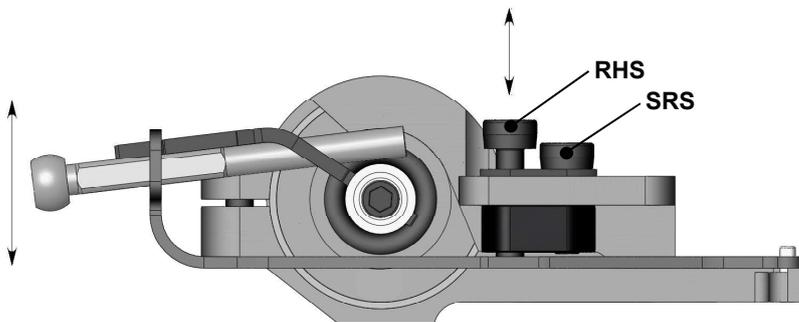


SRS/RHS Screws arrangement I

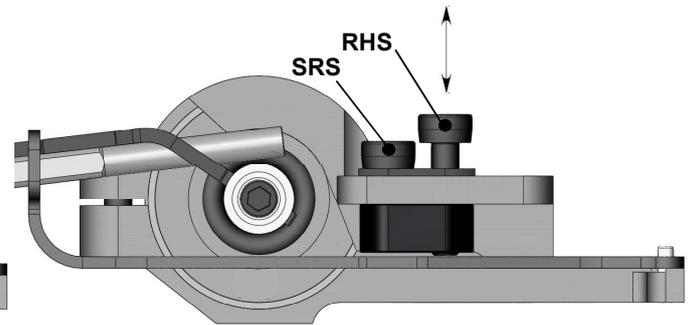


SRS/RHS Screws arrangement II

4. Using of DG1X Damper Gauge

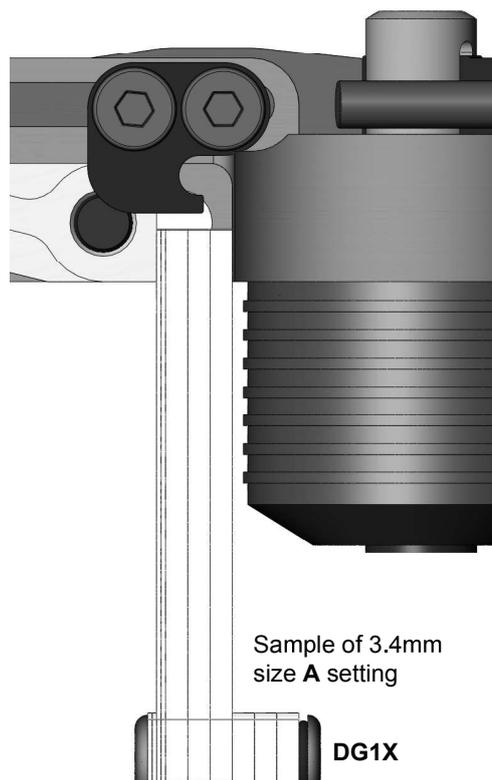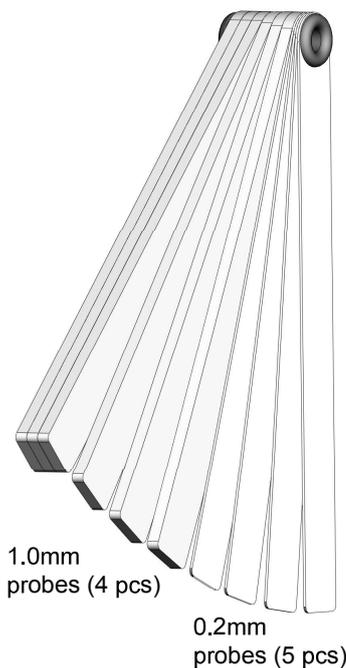

Sample of 3.4mm size **A** setting

DG1X


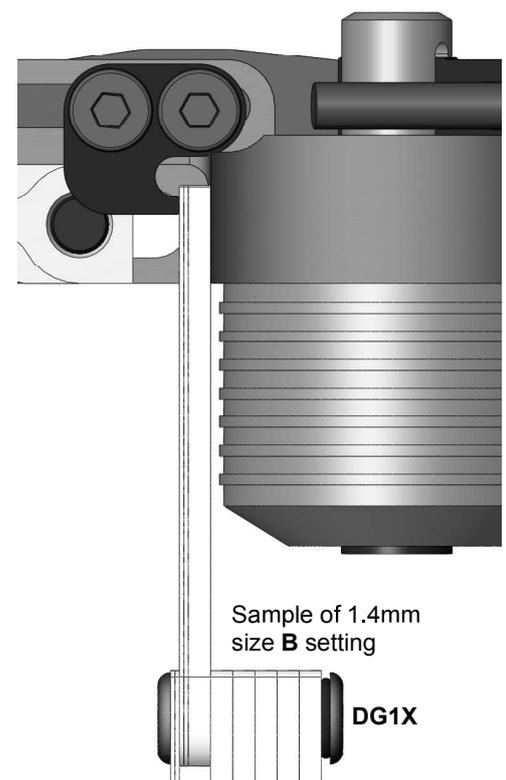


Sample of 1.4mm size **B** setting

DG1X

GRAPHS OF THE SUSPENSION STIFFNESS DEPENDING ON THE POSITION OF THE DAMPER (SIZE A) AND SHOCK SCREW HOLDER (SIZE B)


Suspension rate, gF/mm (vertical force / vertical displacement of the wheel)

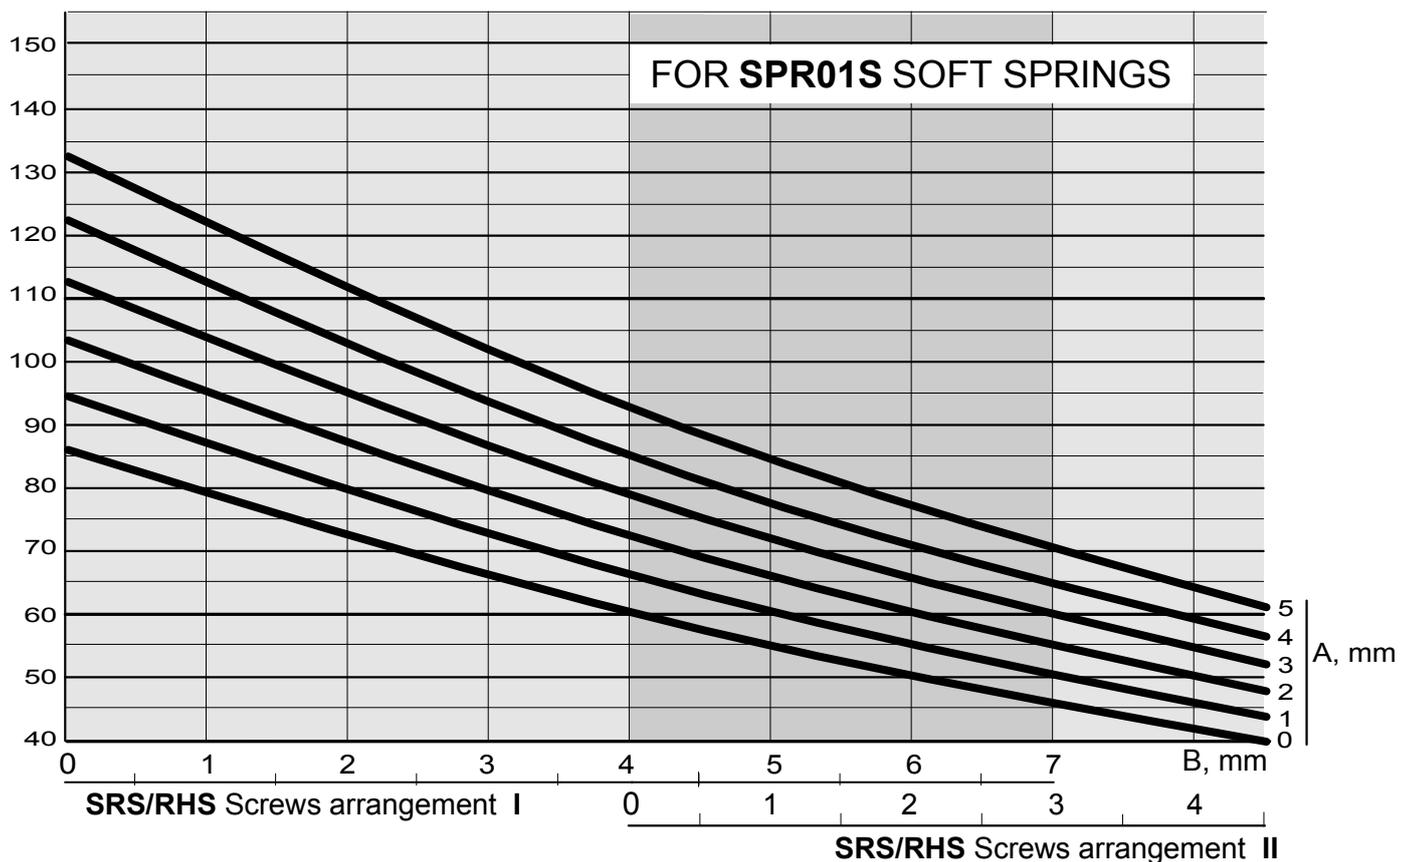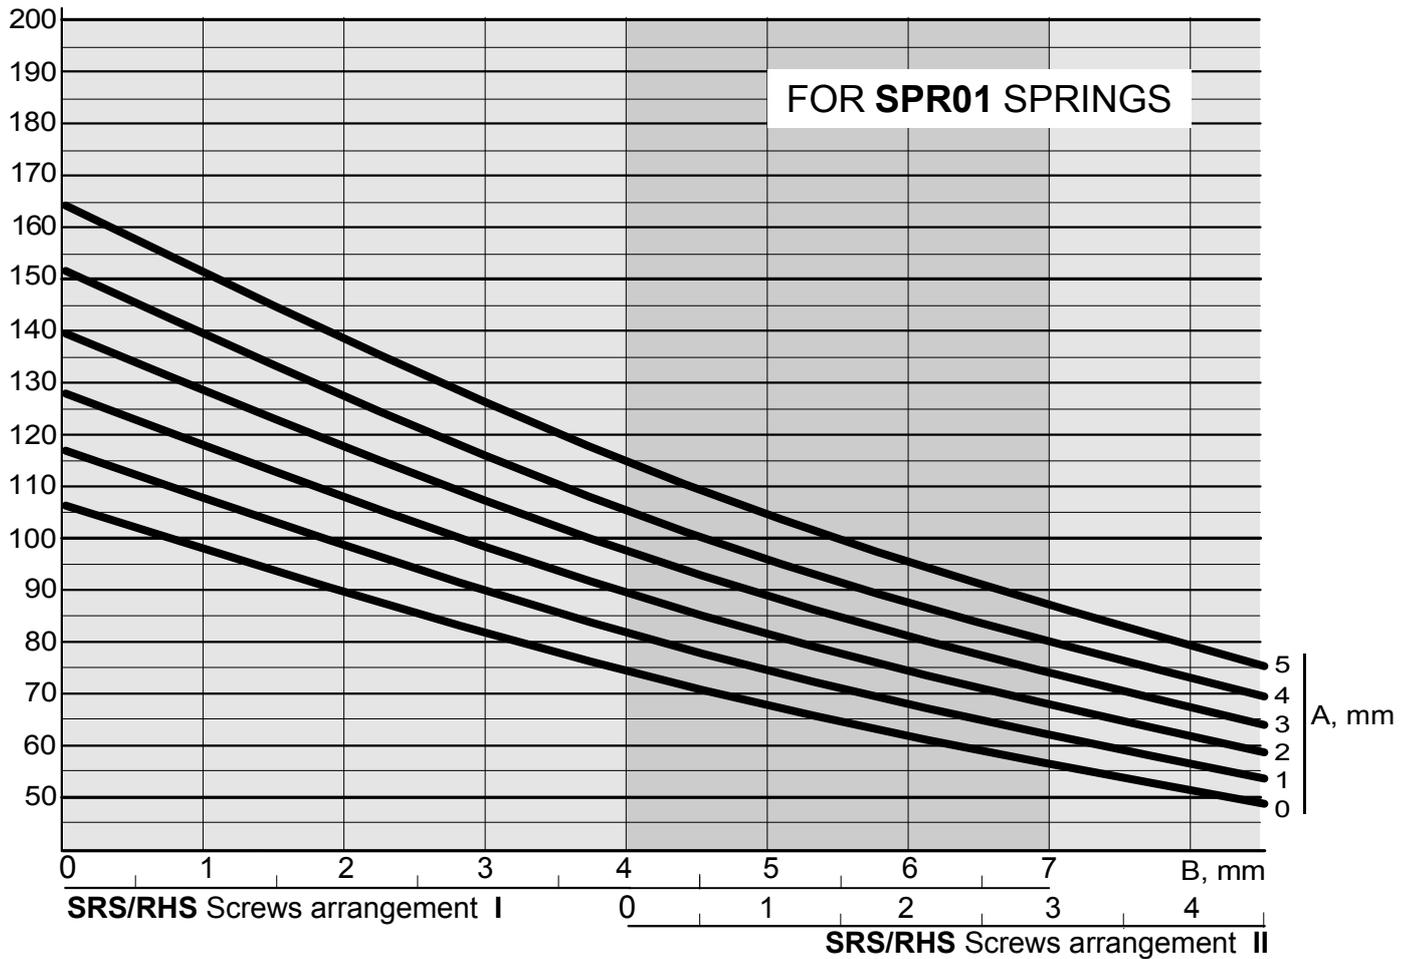

NAME _____
 COUNTRY _____
 RACE _____
 TRACK _____

DATE _____ TEMP. °C AIR / TRACK _____ /
 ASPHALT OUTDOOR INDOOR CARPET
 TRACK CONDITION TECHNICAL MIXED FAST
 TRACTION LOW MEDIUM HIGH

FRONT

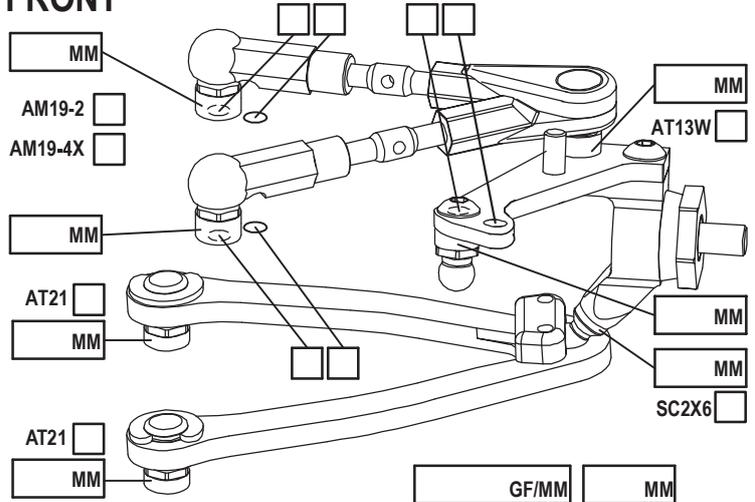

CAMBER ANGLE / ° _____
 CASTER ANGLE / ° _____
 TOE ANGLE / ° _____
 RIDE HEIGHT / MM _____
 DOWNSTOP / MM _____
 UPWNSTOP / MM _____
 STABILIZER Ø / MM _____

LOW ARM C04M1+9.0
 STEER. ARM AM14LS
 WHEEL SPACER / MM _____


FRONT DRIVE SPOOL GB2B LOW HIGH
 DIFF. OIL _____ DIFF WASHERS _____

WHEELHUB AM06WL

SHOCKS SET

ROTOR STD
 SPRING STD S
 DAMPER D2.2
 SRS/RHS ARR. I II
 PSS SETUP 25% 15%

REAR

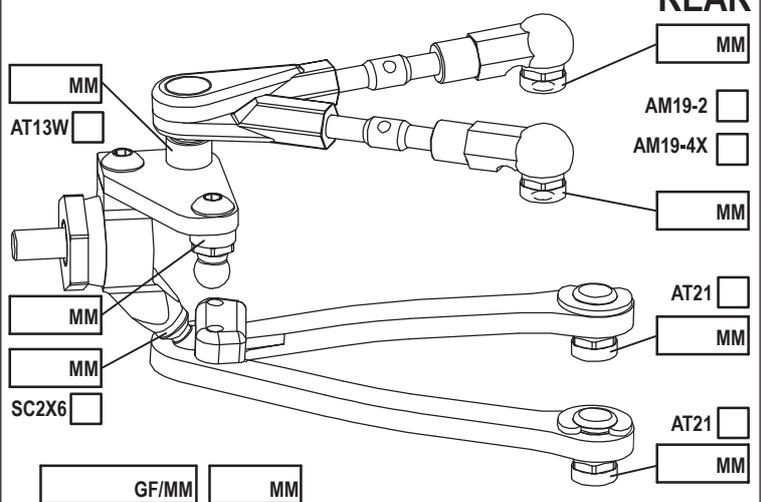

CAMBER ANGLE / ° _____
 CASTER ANGLE / ° _____
 TOE ANGLE / ° _____
 RIDE HEIGHT / MM _____
 DOWNSTOP / MM _____
 UPWNSTOP / MM _____
 STABILIZER Ø / MM _____

LOW ARM C04M1+8.0
 STEER. ARM AM23-1
 WHEEL SPACER / MM _____


REAR DRIVE GB2B LOW HIGH
 DIFF. OIL _____ DIFF WASHERS _____

WHEELHUB AM06WL

SHOCKS SET

ROTOR STD
 SPRING STD S
 DAMPER D2.2
 SRS/RHS ARR. I II
 PSS SETUP 25% 15%

CHASSIS FLEX AND WEIGHT SETTINGS

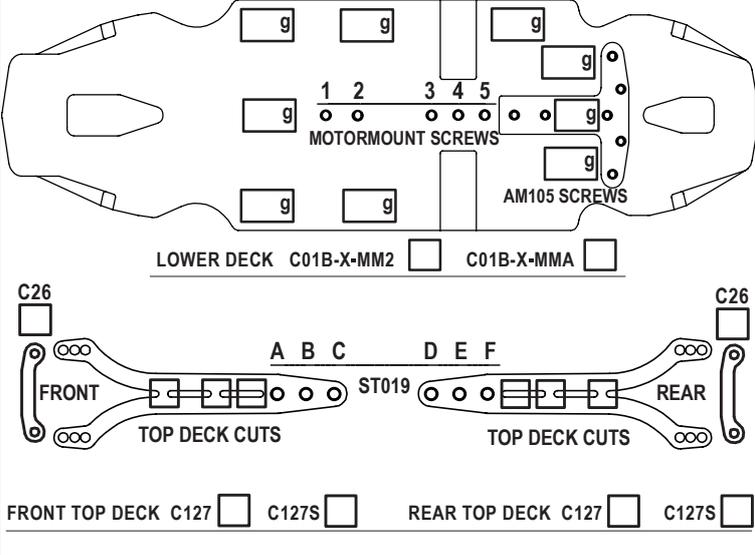

TIRES

INSERTS _____
 WHEELS _____
 ADDITIVE _____ TIME - FR _____ RR _____
 TOTAL WEIGHT _____ WEIGHT DISTRIBUTION F % R %

NOTES: _____

MOTOR LATERAL SHIFT / MM _____ ACKERMANN SHIMS / MM _____
 MOTOR _____ SERVO _____
 SPUR PINION RATIO _____ STEER TRAVEL IN _____ OUT _____
 BODY _____ BATTERY _____
 WING _____ RECEIVER _____
 ESC _____ RADIO _____

ESC SETTING _____
 BEST LAP TIME _____ QUALIF./FINAL POSITION _____ /

COMMENTS:
 Editable setup sheet can be downloaded from: <http://site.petitrc.com/reglages/awesomatix/SetupSheetsAwesomatixA800.html>

Standard Spare Parts

Parts#	Description	Parts#	Description
AM05C	Rear Holder	P15L	Lightweight Foam Bumper
AM06WL	Steering Block	P16	Lock Ring
AM08-3	Shocks Holder	P23	Outer Battery Holder
AM14LS	Steering Arm	P25	Battery Clamp
AM15-3	Battery Nut	P39	GD2 Cross Pin
AM17XL	Damper Holder L	P46R	Diff Piston
AM17XR	Damper Holder R	P56	Antenna Holder
AM19-FX	Upper Arm Holder	P58	Belt Tensioner
AM23-1	Rear Steering Arm	P63	Damper Piston
AM24-8	Central Servo Holder	P110	Bearing Housing
AM78X1	Bulkhead	P138	38T Pulley
AM88R	Shock Holder R	P138S	Spool 38T Pulley
AM88L	Shock Holder L	C01B-X-MM2	Lower Deck Carbon
AM152	SB Stand	C01B-X-MMA	Lower Deck Alloy
AM177	Motor Mount	C04M1+8.0	Suspension Arm
AM180	SB Bellcrank	C04M1+9.0	Suspension Arm
AT03BX	Spool Axle	C127	Top Deck
AT13	Wheel Hex	C127S	Top Deck
AT14	Turnbuckle	SWB10	Sway Bar 1.0mm
AT21ST-A	Pivot Ball Steel	SWB11	Sway Bar 1.1mm
AT25-2	Turnbuckle Long	SWB12	Sway Bar 1.2mm
AT25-44	Turnbuckle 44mm	SPR01	Shock Spring
AT40-1	Damper Cup	SPR02X	Shock Rod Guide
AT41-2	Damper Vane	SPR03	Shock Pointer
AT42-1	Damper Case	SPR05	Body Clip
AT55M	Spur Nut	SPR07	E-Ring
AT119	Spring Screw Holder	SH0.5	6x3x0.5mm Spacer (Silver)
AT120XB	20T Alloy Pulley	SH1.0	6x3x1.0mm Spacer (Gray)
AT123B	GD2B Case1	SH1.75	6x3x1.75mm Spacer (Black)
AT124B	GD2B Case2	SH0.1	6x8x0.1mm Shim
AT142	Sway Bar Stopper	WA02	3x5x0.2 Washer
ST01	Front Axle	WA03	5x15x0.3 Washer
ST02	Rear Axle	PIN01	1.5x7.8 Pin
ST03	Ball Stud	PIN02	1.5x5.8 Pin
ST05L	Shock Rod	OR13V	1x13 mm O-ring
ST113	IFJ Universal Bone	OR05V	GD O-Ring
ST114	IRJ Universal Bone	OR06	5.5mm O-ring
ST116	IFJ/IRJ Cross	OR155V	Damper Output O-Ring
ST16	U-Joint Cross	OR18V	1x8mm Damper O-ring
ST17-1	Universal Ring	B106RS	B106RS Ball Bearing
ST019	Top Deck Screw	B85	B85 Ball Bearing
ST23X	IRJ Outdrive	B84RS	B84RS Ball Bearing
ST24	4,8x6mm Ball Stud	B63SS	B63ZZ Ball Bearing
ST31-1	GD2 Output Axle	B73RS	B73RS Ball Bearing
ST37X	IFJ Outdrive	B415	B415ZZ Ball Bearing
ST38	Universal Nut	SRS	Spring Rating Screw
ST59	LS2 Long Screw	SC2X4	M2x4 Cap Head Screw
ST69-00	Linear Spring Screw	SC2X6	M2x6 Cap Head Screw
ST105	5g Round Weight	SB2.5X8	M2.5x8 Button Head Screw
ST110	10g Round Weight	SS3X3	M3x3 Set Screw
ST118	SB Bellcrank Axle	SS3X5	M3x5 Set Screw
G07	GD2 Satellite Gear	SB3X5AL	M3x5 Alloy Screw
G08	GD2 Bevel Gear	SB3X5	M3x5 Button Head Screw
P01	Ball Joint-1	SB3X6	M3x6 Button Head Screw
P02	Ball Joint-2	SB3X8	M3x8 Button Head Screw
P03	Arm Ball Cap	SB3X10	M3x10 Button Head Screw
P04	Arm Hasp	SB3X12	M3x12 Button Head Screw
P05	Sway Bar Joint	SF3X5	M3x5 Flat Head Screw
P07	Arm Clip	SF3X6	M3x6 Flat Head Screw
P12X	Sway Bar Holder	SF3X8	M3x8 Flat Head Screw
P13-4	Ball End	SF3X10	M3x10 Flat Head Screw
P14X	Bumper Set	BEL351B	Belt 351mm Bando
		DG1X	Damper Gauge Set
		STS-A800MMX	A800MMX Stickers Sheet

Optional Parts

Parts#	Description
C04M1+1.5	Suspension Arm Long
C04AL1+0.5	Alloy Suspension Arm
C04AL1+1.5	Alloy Suspension Arm
C04AL+8.0	Alloy Suspension Arm
C04AL+9.0	Alloy Suspension Arm
C05-H	HRB Post Holder
C07A	Carbon bumper
C25	Steering Stiffener
C26	Top Stiffener
ST17	Universal Ring
ST24M	4,8x8mm Ball Stud
ST24L	4.8x10mm Ball Stud
ST69-15	Progressive Spring Screw
ST69-25	Progressive Spring Screw
ST121	Damper Screw
AT06	Alloy Antenna Holder
AT13W	Wheel Hex Wide
AT15	Bearing Spacer
AT18	BSSX Steering Limiter
AT21	Pivot Ball
AT22M	Rear Body Holder
AT40-M8	Damper Cup
AT78	Damper Piston
AT139	Fan Holder
AT144	ULCG Battery Clamp
AT158	Damper Wrench
AM06M	Steering Block
AM12X	Alloy Battery Holder
AM14A	Steering Arm
AM19-4X	Upper Arm Holder
AM19-2	Upper Arm Holder
AM24-20	Servo Holder
AM87	Bumper Brace
AM105	Rear Stiffener 10g
AM105H	Rear Stiffener 30g
AM111	Belt Anti Skip
AM126	HRB Mount
BW7	Weight 7g
BW8	Weight 8g
BW10L	Weight 10g
BW22	Battery Holder 22g
BW52	Battery Holder 52g
DT10-2-1	Bearing Housing
DT10-3	Bearing Housing
OR152S	U-Ring
OR155	Damper O-Ring
P20	Front Universal Ring
P40F	Servo Arm (Futaba)
P40K	Servo Arm (KO)
P45L	Sponge Piston
P138LF	38T Pulley Low Friction
P138LFS	Spool 38T Pulley Low Friction
SH3X5X0.1	3x5x0.1mm Shim
SH3X5X0.5	3x5x0.5mm Shim
SH0.25	6x3x0.25mm Spacer
SPR01S	Shock Spring Soft
SPR08	Body Support Set
SS3X4	M3x4 Set Screw
SS3X12	M3x12 Set Screw
SWB13	Sway Bar 1.3mm
T01	5.5/4 mm Wrench
D2.2-S-P	Damper
FCB	Flexible Caster Block Set
BC1	Battery Clamp Set
ABS	Adjustable Body Shift Set
LS2	Linear Steering Set
BSSX	Bellcrank Steering Set
HRB	Horizontal Rear Bodypost Set



UAB "AWESOMATIX"
Email: support@awesomatix.com

All rights reserved. ©Copyright UAB "Awesomatix" 2019.