



#1620 / #1621 LIPO SPEC

HIGH PERFORMANCE 1:10 ELECTRIC TOURING CAR

SETUP SHEET


Driver: Simon Nicholson

Track / City: _____

Event: _____ Date: _____


Front

Caster 3 Downstops 6 mm Oil 50 WT
 Toe-out 1 Anti-roll bar 1.6 Piston TAM 3 Hole
 Camber 1.5 Front width 186 mm Rebound 0
 Ride Height 5 Front drive Spool Spring HPI Silver lbs
 Wishbone Straight Front pulley 42 Shock tower STD
 Wheelbase Long Steering STD Steering block Plasti
 F Mount +1.5 F Height shims 1.2 mm F WB shims 0 mm
 R Mount +1.5 R Height shims 1.2 mm R WB shims 3 mm

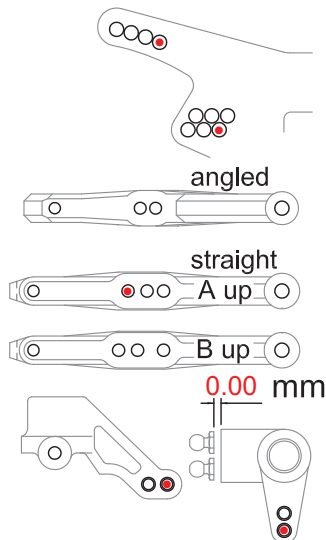

Rear

Anti-squat 0 Downstops 5 mm Oil 50 WT
 Toe-in 3 Anti-roll bar 1.3 Piston TAM 3 Hole
 Camber 2 Rear width 186 mm Rebound 0
 Ride Height 5.5 Center pulley 21 T Spring HPI Silver lbs
 Wishbone Straight Rear pulley 42 T Shock tower LOW
 Wheelbase Long Upright 0 toe-in
 F Mount -2.0 F Height shims 1.8 mm F WB shims 3 mm
 R Mount +0.5 R Height shims 1.8 mm R WB shims 0 mm

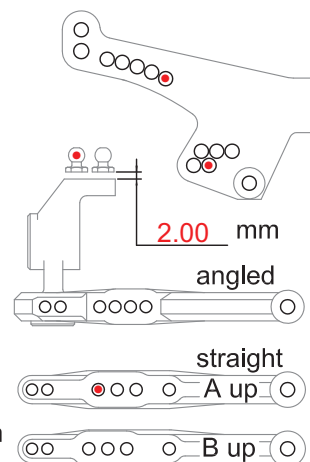


Others

Tires _____ Tire additive FXII Tire Diameter 63.00
 Motor _____ Motor setup _____ Spur / Pinion 104 T / 24 T
 Radio _____ Servo _____ Final Drive 8.67 Rollout 22.83
 Body _____ Wing _____
 Chassis _____ Lead Weights _____ g

ESC _____

Weight balance

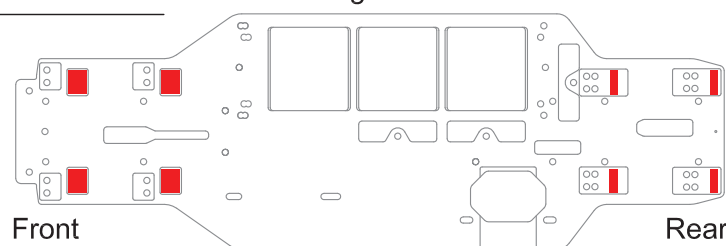

Track Conditions

Surface _____
 Traction _____
 Temp. _____
 Notes _____

Ackerman Chassis brace backwards,
 2.5mm Chassis with no stiffeners but
 if tyre overheat put stiffeners in.

Race Comments

Main _____ Finish _____ Qual. Pos. _____ Time _____ Laps _____