

### Track Condition

Composition:  Asphalt  Carpet  
 Environment:  Indoor  Outdoor  
 Surface:  Smooth  Medium  Bumpy  
 Traction:  Low  Medium  High  
 Size:  Tight  Medium  Open  
 Track Temp.: 70 Air Temp.: 65

### Electronics

Motor: 17.5 tsr Timing: 45  
 ESC: Xr10 hw Battery: 5000 100c  
 Spur: 92 Pinion: 45 Ratio: \_\_\_\_\_

### Aerodynamics

Body: Is200 Wing: Lowest line

<b>Front</b>	<b>Shocks</b>	<b>Rear</b>
<u>2.5-2.8</u>	- Spring -	<u>2.5-2.8</u>
<u>Losi 40</u>	- Oil -	<u>Losi 40</u>
<u>3 kit</u>	- Piston -	<u>3 kit</u>
<u>0</u>	- Rebound (%) -	<u>0</u>
<u>Non</u>	- Foam Inserts -	<u>Non</u>

### Anti-Roll Bar

3 \_\_\_\_\_ 2

### Tires

<u>Sorex</u>	- Inserts -	<u>Sxorex</u>
<u>Spec</u>	- Rims -	<u>Spec</u>
<u>Paragon</u>	- Additive -	<u>White can</u>
<u>5min</u>	- Additive Time -	<u>5min</u>

Fr Left	Fr Right	<b>Surface</b>	Rr Left	Rr Right
<u>Sorex</u>				<u>Sorex</u>





### Transmission

Gear  Ball - Diff -  Gear  Ball  
 - Oil - Axon  
 - Oil Weight (Grs) - 5000  
 - Settings - \_\_\_\_\_  
 Spool

*Awesomatix offset pivot balls on all lower a arms rear, moves the rear wheels forward .5 mm Front, clocked at 10 and 4 to move Front wheels forward and add arm sweep caution, they are .5 mm taller on role center X-ray short*

### Front

Toe: 1.5  
 Camber: 2.6  
 Caster: 3  
 Droop: 2.0  
 Rideheight: 4.8  
 Wheel Hex: 0.0

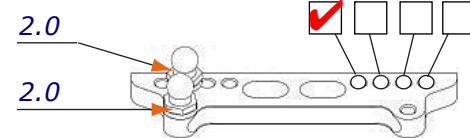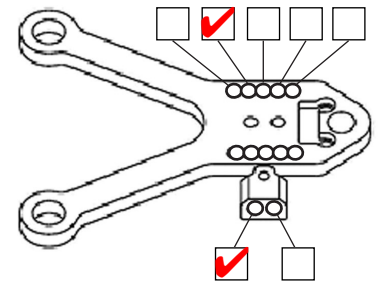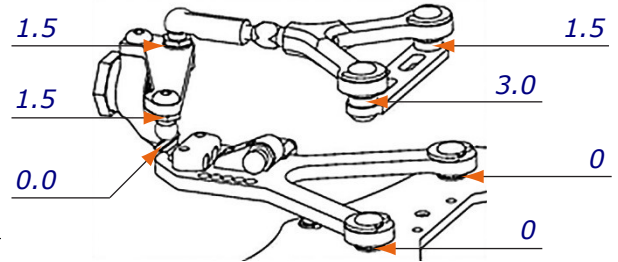

### Rear

Toe: 2.5  
 Camber: 2.1  
 Caster: 2  
 Droop: 2.5  
 Rideheight: 5.5  
 Wheel Hex: 1.0

