



Setup sheet

Name: Todd Hodge Date: _____ Event: Region 12 Champs

City: Ripon State: CA Track: Ripon

Track Conditions Indoor Tight Asphalt Sealed Low Bite
 Outdoor Open Concrete Smooth Med Bite
 Carpet Rough High Bite

Front Suspension

Toe: .4mm
Ride Height: 4.5mm
Camber: -1.25
Kick/Anti-Dive: 0
Caster: 4
Droop: 3.5mm above ride height
Front Pivot: 0° 1° 2°
Roll Center: Low
Arm Spacing: Middle
Shock Position: #2
Steering Rack: #2
Spindle Ackerman: #1
Camber Link: #1/Jr link
Camber Ball Stud: n/a
Sway Bar: .040"

Up Travel: _____

Arm Length: Short Long

Front Drivetrain

Front Drive: Spool One-way Diff
Grease Type: n/a
Pulley: 41 42
Diff Height: High Low
Drive Axle: LCD
Hex Width: .165 stk. .195 .225


Shocks

Oil: 40
Oil Brand: Team Losi
Piston: 56
Spring: 15lb
Bladder: Losi Black
Above Bladder: Tamiya Red Foam

"JR" Link

High

Low



0 # of Washers Under Ball Stud
_____ Size Of Washer
Std. _____ Type of Ball Stud

Steering Rack

0 # of Washers Under Ball Stud
_____ Size Of Washer
Std. _____ Type of Ball Stud

Spindle

Rear Suspension

Toe: 3
Ride Height: 4.5mm
Droop: 4mm above ride height
Camber: -1.25
Anti/Pro Squat: 0
Hub: STD. Offset 0° 1/2° 1° 2°
Rear Pivot: 0° 1° 2°
Roll Center: Low
Arm Spacing: Back
Shock Position: #1
Camber Link: 5/B
Camber Link Ball Stud: Tall
Sway Bar: .030"

Up Travel: _____

Arm Length: Short Long

Rear Drivetrain


Diff Height: High Low
Drive Axle: RCD
Hex Width: .165 stk. .195 .225

Shocks

Oil: 35
Oil Brand: Team Losi
Piston: 56
Spring: 10
Bladder: Losi Black
Above Bladder: Tamiya Red Foam

Outside
Inside

0 # of Washers Under Ball Stud
_____ Size Of Washer

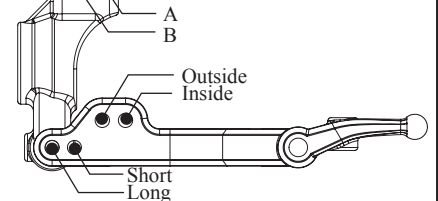


Body PF Mazda 6
Wing Mazda 6
FR Body Hole 5
RR Body Hole 5 Inside Outside
5th Body Hole no
Body Height ROAR

Motor Orion BL
Turns 3.5
Brushes Not needed
Springs _____
Timing _____

Spur Gear 128
Pinion Gear 22
Ratio 10.64
Roll Out _____
Fans _____

Servo JR 8800S
ESC Novak GTB
Receiver Spektrum 3500
Battery IB4200
Transponder Location Next to receiver

Tires: _____ Brand/Compound _____ Size (mm) _____ Insert _____ Wheel _____ Tire Warmers
Front: RP30 _____ _____ _____ Soft YES 60 Temp °F or °C
Rear: _____ _____ _____ _____ NO _____

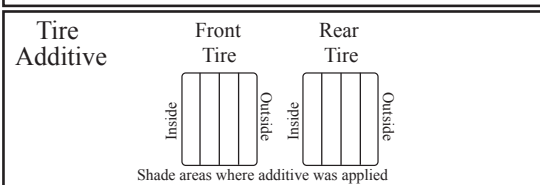

NOTES:

Tire Tweak for tire additive. Outside temperature was 75.

