

DATE 9/14/2017

DRIVER Atsushi Hara

TRACK RC Stadium Sodegaura

CARPET ASPHALT

TRACTION

LOW MEDIUM HIGH

LAYOUT

SLOW MIXED FAST

ELECTRIC'S

STEERING SERVO TYPE Futaba BLS571 SETTINGS SR Mode No.3

ESC Yokomo BL-PRO4

ENGINE Yokomo M3 SETTINGS 4.5T

TYRES/ADDITIVE TYPE Rush 36S MTG V3 Yellow

FRONT FULL MIN. REAR FULL MIN.

SHOCK ABSORBERS

FRONT REAR

PISTON Kit PISTON Kit

OIL #450 OIL #450

SPRING Xray 2.6 SPRING Xray 2.6

ANTI ROLL BAR FRONT

1,2 1,3 1,4 1,5

ANTI ROLL BAR REAR

1,1 1,2 1,3 1,4

SERVO SAVER POSITION

FORWARD REARWARD

PINION 26T SPUR 116T

DIFF SPOOL

HIGH LOW

HIGH LOW

DIFF OIL CST #3,000

SHOCK POSITION LOWER ARM

PART# Kit PART# Kit

HOLE POSITION BALL LINK INSIDE OUTSIDE

HOLE POSITION BALL LINK INSIDE OUTSIDE


FLEX

ULTRAFLEX

TOPDECK

SCREW'S ASSEMBLED

CASTER POSITION



FF: A2105A/A2104 1pc. 2pcs.


FR: A2105B/A2104 1pc. 2pcs.

0° LOWER ARM ANGLE 0°



KICK-UP/ANTI-DIVE FR FF

UPPER ARM POSITION SHIM(mm) 0 0

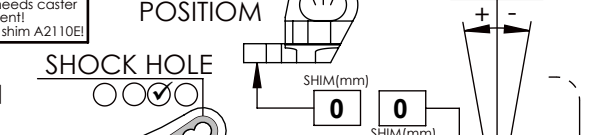

ROLL CENTER/ TRACK WIDTH (LEFT SIDE VIEW) 5.2 (mm) 5.8 (mm)

RIDE HEIGHT DOWNSTOP

CAMBER LINK POSITION



RF: A2106B/A2104 1pc. 2pcs.

RR: A2106A/A2104 1pc. 2pcs.

FINAL TOE IN 2.5

BOTH CENTER = 3° TOE IN



KICK-UP/ANTI-DIVE RF RR

SHIM(mm) 2 SHIM(mm) 2



ROLL CENTER/TOE IN/ TRACK WIDTH (RIGHT SIDE VIEW) 5.4 (mm) 4.6 (mm)

RIDE HEIGHT DOWNSTOP

A2404

ASSEMBLED SCREW'S

A2405

INSIDE SHIM(mm) 0

OUTSIDE

75.5 (mm)

TOE OUT°

WHEELBASE WEIGHT g. 10 0

WEIGHT g. CHASSIS# 0

10 Kit 0

BODY POSITION

SERVOPLATE

CHASSIS

STEERING STOPPER A2304/A2305/A2306

NO

WING TYPE RC Mission 0.8mm

Pf LTC-R LW

BODY TYPE 8 OVERHANG(mm)

8

NOTES:

