

## DRIVER AND EVENT DETAILS

Name LORENZO BIGI  
 Date 19/10/08  
 Event ITALIAN UISP NATIONALS  
 Weather - ROMA -  
 Result

## TRACK CONDITIONS

Grip Level High  Medium  Low   
 Track Type Tight  Open  Both   
 Surface Carpet  Tarmac  Wood   
 Venue Indoor  Outdoor   
 Track Condition Smooth  Bumpy   
 Track Temperature °C °F



## DRIVER NOTES

HEX SPACER

## CHASSIS AND ELECTRICS

Chassis U3146 - 2,5 mm  
 Top Deck U3246 - 2,5 mm  
 Bodyshell BLITZ ALTIS  
 Wing STANDARD  
 E.S.C SPEED PASSION GT  
 Servo SANWA RZ  
 Receiver SANWA SPEKTRUM  
 Number of Cells 4  5  6   
 Type of Cells LIPO CORE 5000

## MOTOR AND GEARING

Type Brushed  Brushless   
 Motor SPEED PASSION V2.0  
 Brush 4,5 T  
 Spring  
 Timing  
 Gear Pitch 48Dp  64Dp   
 Spur Size 89  
 Pinion Size 19


## WHEELS, TYRES AND INSERTS

Wheels ATS KYOSHO WHITE  
 Tyres ATS 375h FRONT/REAR  
 Inserts  
 Tyre Additive NO  
 Additive Time MIN (R) MIN (F)  
 Tyre Warmers Yes  No

## FRONT SETTINGS



Drive Diff  Spool  One-Way  Height High  Low

Servo Saver Yes  No   
 Toe In-Out In-board  Out-board  0° Toe-out  
 Screw Block Spacers Front 2,0 mm Rear 1,5 mm  
 Wishbone Quik-Klips Front 1,0 mm Rear 3,0 mm  
 Link Washers (Horizontal) 4,0 mm  
 Ride Height (Chassis to Floor) 5,0 mm  
 Droop (Chassis to Floor) 6,5 mm  
 Anti-roll Bar Yes  No  1.20  1.40  1.60   
 Castor 0°  2°  4°  6°   
 Camber Positive  Negative  -3 RIGHT Deg  
-2,5 LEFT  
 Link Washers (Vertical) 2 mm  
 Inboard Pin Kick-up  Anti-dive  Horizontal   
 Pivot Block Spacers Front 1,5 mm Rear 1,5 mm

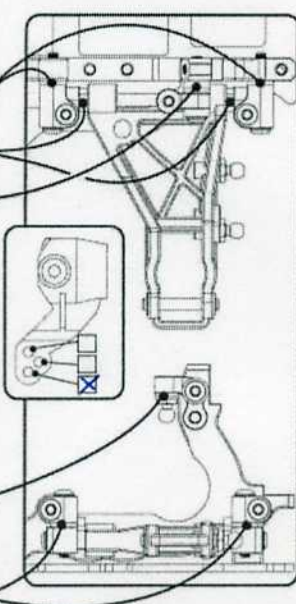


## Front Shocks

Oil 60 WT  
 Springs SCHUM. VIOLET  
 Piston Holes 2  3   
 length 62,5  
 Rebound 70 %




## Centre Track Rod

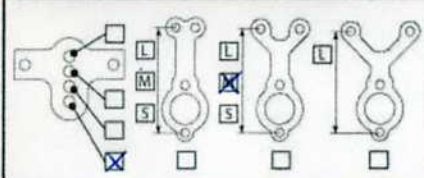

## REAR SETTINGS



Drive Height High  Low

Toe In In-board  -3° Out-board  0° -3°  
 Screw Block Spacers Front 1,5 mm Rear 0,5 mm  
 Wishbone Quik-Klips Front 3,0 mm Rear 1,0 mm  
 Link Washers (Horizontal) 4,0 mm  
 Ride Height (Chassis to Floor) 5,0 mm  
 Droop (Chassis to Floor) 6,5 mm  
 Anti-roll Bar Yes  No  1.20  1.40  1.60   
 Camber Positive  Negative  -3 RIGHT Deg  
-2,0 LEFT  
 Link Washers (Vertical) 2 mm  
 Inboard Pin Pro-Squat  Anti-Squat  Horizontal   
 Pivot Block Spacers Front 2,5 mm Rear 2,5 mm

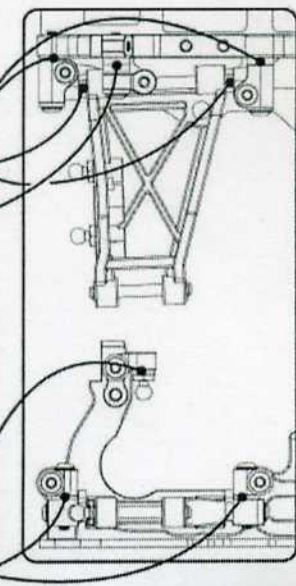

## Rear Shocks

Oil 30 WT  
 Springs SCHUM. BLUE  
 Piston Holes 2  3   
 length 62,5  
 Rebound 70 %



## Driver Notes

HEX SPACER