

## DRIVER AND EVENT DETAILS

Name Paul Wynn  
 Date 8/19/07  
 Event Warm-up Race  
 Weather HOT  
 Result TQ & 1st Place

## CHASSIS AND ELECTRICS

Chassis 2mm 5-cell  
 Top Deck Flex  Standard  Stiff   
 Bodyshell Mazda 6  
 Wing Stock/mounted back  
 E.S.C LRP TC Spec  
 Servo Futuba 9550  
 Receiver Sanwa mini  
 Number of Cells 4  5  6   
 Type of Cells EA 4200

## TRACK CONDITIONS

Grip Level High  Medium  Low   
 Track Type Tight  Open  Both   
 Surface Carpet  Tarmac  Wood   
 Venue Indoor  Outdoor   
 Track Condition Smooth  Bumpy   
 Track Temperature °C 140 °F



## DRIVER NOTES

Used Mi2EC c/f arms. Used shortest steering rack. U3221 front hexes with .5mm wheel spacer. Drilled middle hole for steering link on steering block.

## MOTOR AND GEARING

Type Brushed  Brushless   
 Motor LRP 3.5  
 Brush  
 Spring  
 Timing  
 Gear Pitch 48Dp  64Dp   
 Spur Size 118  
 Pinion Size 26



## WHEELS, TYRES AND INSERTS

Wheels TakeOff CS27 Handout  
 Tyres  
 Inserts  
 Tyre Additive SXT 2.0  
 Additive Time 30 MIN (R) 30 MIN (F)  
 Tyre Warmers Yes  No

## FRONT SETTINGS


Drive Diff  Spool  One-Way  Height High  Low

Servo Saver Yes  No   
 Toe In-Out In-board  Out-board  1 ° Toe-out  
 Screw Block Spacers Front .5 mm Rear .5 mm  
 Wishbone Quik-Klips Front 2 mm Rear 2 mm  
 Link Washers (Horizontal) 3 mm  
 Ride Height (Chassis to Floor) 5 mm  
 Droop (Chassis to Floor) 7 mm  
 Anti-roll Bar Yes  No  1.20  1.40  1.60   
 Castor 0°  2°  4°  6°   
 Camber Positive  Negative  1.2 Deg  
 Link Washers (Vertical) 2 mm  
 Inboard Pin Kick-up  Anti-dive  Horizontal   
 Pivot Block Spacers Front 1 mm Rear 1 mm

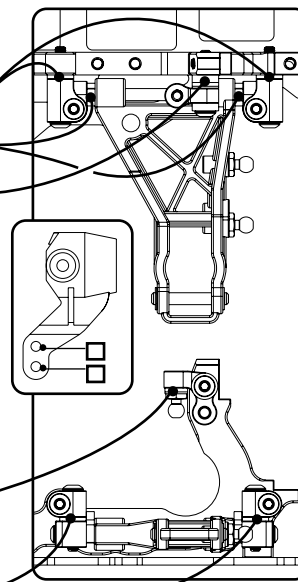


## Front Shocks

Oil 35 WT  
 Springs Tamiya Yellow  
 Piston Holes 2  3   
 length 61.5mm  
 Rebound 35 %





## Centre Track Rod

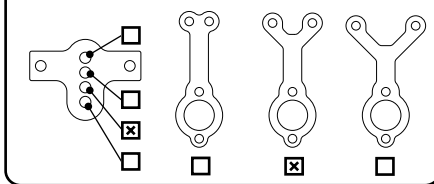

## REAR SETTINGS


Drive Height High  Low

Toe In In-board  Out-board  °  
 Screw Block Spacers Front 2 mm Rear 1 mm  
 Wishbone Quik-Klips Front 3 mm Rear 1 mm  
 Link Washers (Horizontal) 3 mm  
 Ride Height (Chassis to Floor) 5.2 mm  
 Droop (Chassis to Floor) 8 mm  
 Anti-roll Bar Yes  No  1.20  1.40  1.60   
 Camber Positive  Negative  1.5 Deg  
 Link Washers (Vertical) 3 mm  
 Inboard Pin Pro-Squat  Anti-Squat  Horizontal   
 Pivot Block Spacers Front 2 mm Rear 2 mm

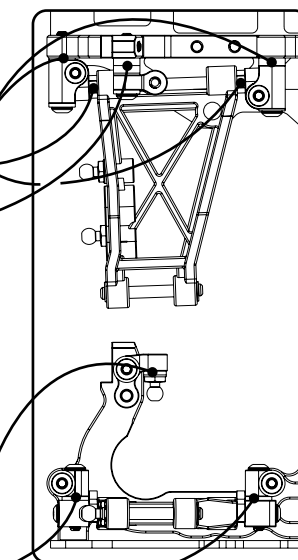

## Rear Shocks

Oil 35 WT  
 Springs Tamiya Yellow  
 Piston Holes 2  3   
 length 62mm  
 Rebound 35 %



## Driver Notes

Used Mi2EC c/f arms. Hub spaced Quik-klips (1mm front/3mm back). Used 1mm stock wheel spacer.

