

DRIVER AND EVENT DETAILS

Name

Date

Event **BAYSIDE**

Weather **Sunny**

Result

TRACK CONDITIONS

Grip Level High Medium Low

Type Tight Open Both

Surface Carpet Tarmac Wood

Condition Smooth Bumpy

Temperature 26 °C °F

Venue Indoor Outdoor



CHASSIS AND ELECTRICS

Chassis **std**

Top Deck **std**

Bodyshell **Protoform Speed 6**

Wing **std**

E.S.C **LRP SPX**

Servo **Futaba**

Receiver **KO**

Number of Cells 4 5 6

Type of Cells **Lipo**

MOTOR AND GEARING

Type Brushed Brushless

Motor **Tekin 17.5**

Brush

Spring

Timing **12**

Gear Pitch 48Dp 64Dp

Spur Size **70**

Pinion Size **31**

WHEELS, TYRES AND INSERTS

Wheels **Schumacher Revlite**

Tyres **Sorex 36R**

Inserts **MuchMore Medium**

Tyre Additive **Simple Green**

Additive Time MIN (R) MIN (F)

Tyre Warmers Yes No

DRIVER NOTES

1 mm shim under F link mount.
Med Flex short arms F/R.

Front Shocks

Oil **40** WT

Springs **HPI Silver**

Piston Holes 2 3

length **62** mm

Rebound **50** %

FRONT SETTINGS

Drive Diff Spool One-Way Height High Low

Servo Saver Yes No

Pivot Blocks Moulded (std) Alloy

Screw Block Spacers Front 2 mm Rear 2 mm

Wishbone Quik-Klips Front 2 mm Rear 2 mm

Toe In-Out In-board Out-board 0 °

Ride Height (Chassis to Floor) **5.5** mm

Droop 3 on droop gauge mm

Anti-roll Bar No 1.20 1.40 1.60




Castor 0° 2° 4° 6°

Camber Positive Negative 1.5 Deg

Link Washers **0** mm

Inboard Pin Kick-up Anti-dive Horizontal

Pivot Block Spacers Front mm Rear mm

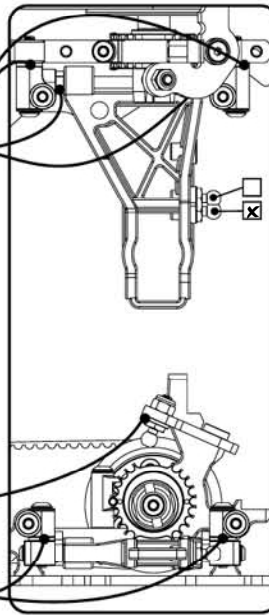

Centre Track Rod


Washers **4** mm

Link Mount

1 Groove

2 Groove

3 Groove



REAR SETTINGS

Drive Height High Low

Pivot Blocks Moulded (std) Alloy

Screw Block Spacers Front 2 mm Rear 2 mm

Wishbone Quik-Klips Front 2 mm Rear 2 mm

Toe In In-board 3 ° Out-board

Ride Height (Chassis to Floor) **6.0** mm

Droop 3 on droop gauge mm


Anti-roll Bar No 1.20 1.40 1.60

Camber Positive Negative 1.5 Deg

Link Washers **1** mm

Inboard Pin Pro-Squat Anti-Squat Horizontal

Pivot Block Spacers Front mm Rear mm

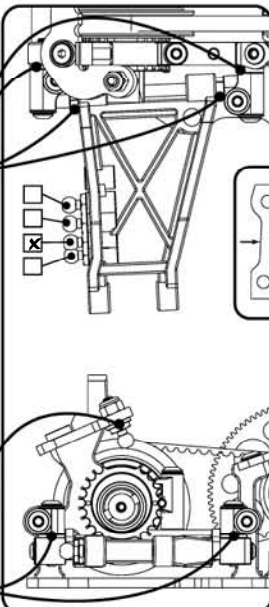


Link Mount

1 Groove

2 Groove

3 Groove




1.4mm

2.4mm

3.4mm

4.4mm



Rear Shocks

Oil **40** WT

Springs **HPI Silver**

Piston Holes 2 3

length **62** mm

Rebound **50** %