

## DRIVER AND EVENT DETAILS

Name

Date

Event

Weather

Result

## CHASSIS AND ELECTRICS

Chassis

Top Deck

Bodyshell

Wing

E.S.C

Servo

Receiver

Number of Cells  4  5  6

Type of Cells

## TRACK CONDITIONS

Grip Level  High  Medium  Low

Type  Tight  Open  Both

Surface  Carpet  Tarmac  Wood

Condition  Smooth  Bumpy

Temperature  °C  °F

Venue  Indoor  Outdoor

## MOTOR AND GEARING

Type  Brushed  Brushless

Motor

Brush

Spring

Timing

Gear Pitch  48Dp  64Dp

Spur Size

Pinion Size

Arr01@PetitRC.com



## WHEELS, TYRES AND INSERTS

Wheels

Tyres

Inserts

Tyre Additive

Additive Time  MIN (R)  MIN (F)

Tyre Warmers  Yes  No

## DRIVER NOTES

## FRONT SETTINGS

Drive  Diff  Spool  One-Way  Height  High  Low

Servo Saver  Yes  No

Pivot Blocks  Moulded (std)  Alloy

Screw Block Spacers  Front  mm  Rear  mm

Wishbone Quik-Klips  Front  mm  Rear  mm

Toe In-Out  In-board  Out-board  °

Ride Height (Chassis to Floor)  mm

Droop  mm

Anti-roll Bar  No  1.20  1.40  1.60



Castor  0°  2°  4°  6°

Camber  Positive  Negative  Deg

Link Washers  mm

Inboard Pin  Kick-up  Anti-dive  Horizontal

Pivot Block Spacers  Front  mm  Rear  mm

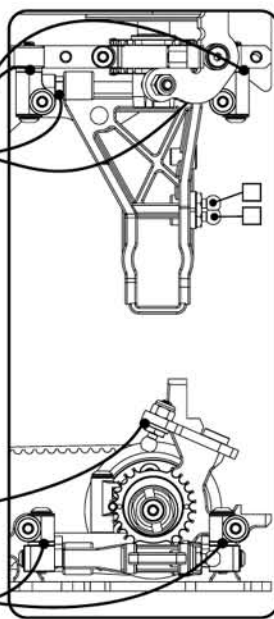

## Front Shocks


Oil  WT

Springs

Piston Holes  2  3

length

Rebound  %



## Centre Track Rod


Washers  mm

## Link Mount

1 Groove

2 Groove

3 Groove



## REAR SETTINGS

Drive Height  High  Low

Pivot Blocks  Moulded (std)  Alloy

Screw Block Spacers  Front  mm  Rear  mm

Wishbone Quik-Klips  Front  mm  Rear  mm

Toe In  In-board  Out-board  °

Ride Height (Chassis to Floor)  mm

Droop  mm


Anti-roll Bar  No  1.20  1.40  1.60

Camber  Positive  Negative  Deg

Link Washers  mm

Inboard Pin  Pro-Squat  Anti-Squat  Horizontal

Pivot Block Spacers  Front  mm  Rear  mm

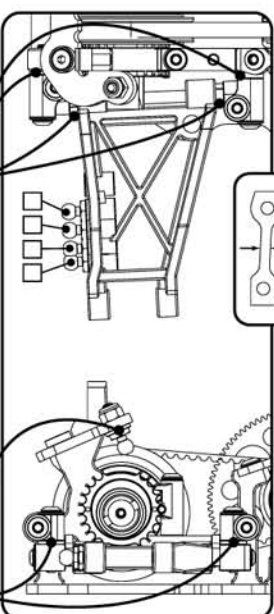

## Link Mount

1 Groove

2 Groove


3 Groove

1.4mm

2.4mm

3.4mm

4.4mm



## Rear Shocks

Oil  WT

Springs

Piston Holes  2  3

length

Rebound  %

