

DRIVER AND EVENT DETAILS

Name *Rémi Callens*
 Date *23-24.07.2011*
 Event *Benelux Race*
 Weather *Saturday: overcast Sunday:*
 Result *Q:3 F:2*

CHASSIS AND ELECTRICS

Chassis *2 mm soft weave*
 Top Deck *2 mm*
 Bodyshell *Protoform MazdaSpeed 6*
 Wing *Protoform*
 E.S.C *Tekin RS Pro PRT*
 Servo *Futaba S9551*
 Receiver *Futaba*
 Cells *Nosram 6200 65C*

TRACK CONDITIONS

Grip Level High Medium Low
 Type Tight Open Both
 Surface Carpet Tarmac Wood
 Condition Smooth Bumpy
 Temperature *13 °C* °F
 Venue Indoor Outdoor



WHEELS, TYRES AND INSERTS

Wheels *Schumacher*
 Tyres *Sorex 36R*
 Inserts
 Tyre Additive *Rheinard*
 Additive Time *40 MIN (R) 35 MIN (F)*
 Tyre Warmers Yes No

DRIVER NOTES

*Direction option
 Diff pignon (huile:2000)*


Front Shocks

Oil *30 WT*
 Springs *XRay 2.6*
 Piston Holes *2 3*
 length *12mm*
 Rebound *75%*




FRONT SETTINGS

Drive Diff Spool One-Way Height High Low

Servo Saver Yes No Yoke Flex X M STD
 Pivot Blocks Moulded (std) Alloy
 Screw Block Spacers Front *1.5 mm* Rear *1.5 mm*
 Wishbone Quik-Klips Front *2 mm* Rear *2 mm*
 Toe In-Out In-board Out-board *0°*
 Ride Height (Chassis to Floor) *5 mm*
 Droop On 10mm Block Axle Height *5.5 mm*
 Anti-roll Bar No 1.20 1.40 1.60
 Castor *0°* 2° 4° 6°
 Camber Positive Negative *1 Deg*
 Link Washers Under Ball Under Bracket *1 mm*
 Inboard Pin Kick-up Anti-dive Horizontal
 Pivot Block Spacers Front mm Rear mm



Wishbone Flex CF M



Centre Track Rod

Washers mm


Link Mount

1 Groove - 45mm
 2 Groove - 42mm
 3 Groove - 39mm
 4 Groove - 37mm


REAR SETTINGS

Drive Height High Low

Pivot Blocks Moulded (std) Alloy
 Screw Block Spacers Front *2 mm* Rear *1 mm*
 Wishbone Quik-Klips Front *2 mm* Rear *2 mm*
 Toe In In-board *3°* Out-board *0°*
 Ride Height (Chassis to Floor) *5.5 mm*
 Droop On 10mm Block Axle Height *4.5 mm*
 Anti-roll Bar No 1.20 1.40 1.60
 Camber Positive Negative *2 Deg*
 Link Washers Under Ball Under Bracket *1 mm*
 Inboard Pin Pro-Squat Anti-Squat Horizontal
 Pivot Block Spacers Front *1.5 mm* Rear *1.5 mm*




Wishbone Flex CF M



Link Mount

1 Groove - 45mm
 2 Groove - 42mm
 3 Groove - 39mm
 4 Groove - 37mm

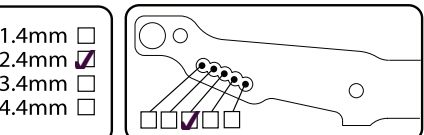

Rear Shocks

Oil *30 WT*
 Springs *XRay 2.4*
 Piston Holes *2 3*
 length *12mm*
 Rebound *75%*