

### DRIVER AND EVENT DETAILS

Name

Date

Event

Weather

Result

### CHASSIS AND ELECTRICS

Chassis

Top Deck

Bodyshell

Wing

E.S.C

Servo

Receiver

Cells

Cell Position  Backward  Forward

### TRACK CONDITIONS

Grip Level  High  Medium  Low

Type  Tight  Open  Both

Surface  Carpet  Tarmac  Wood

Condition  Smooth  Bumpy

Temperature  °C

Venue  Indoor  Outdoor



### MOTOR AND GEARING

Motor

Rotor Diameter

Timing

Gear Pitch  48Dp  64Dp

Spur Size

Pinion Size

Transmission  
Option 1  Option 2

### WHEELS, TYRES AND INSERTS

Wheels

Tyres

Inserts

Tyre Additive

Additive Time

Tyre Warmers  Yes  No

### DRIVER NOTES

slim front hex, steering on chassis

### Front Shocks

Oil

Springs

Piston Holes  2  3

length

Rebound

### FRONT SETTINGS

Drive  Diff  Spool  One-Way  Height  High  Low

Servo Saver  Yes  No  Yoke Flex  M  STD

Pivot Blocks  Moulded (std)  Alloy

Screw Block Spacers

Wishbone Quik-Klips

Toe In-Out  In-board  Out-board

Ride Height (Chassis to Floor)

Droop  On 10mm Block  Axle Height

Anti-roll Bar  No  1.20  1.40  1.60




Castor  0°  2°  4°  6°

Camber  Positive  Negative

Link Washers  Under Ball  Under Bracket

Inboard Pin  Kick-up  Anti-dive  Horizontal

Pivot Block Spacers

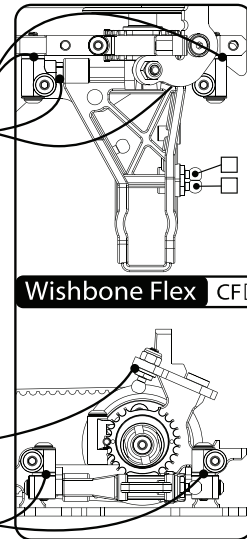

### Centre Track Rod

Washers

### Link Mount

1 Groove - 45mm

2 Groove - 42mm

3 Groove - 39mm

4 Groove - 37mm

### REAR SETTINGS

Diff  Ball  Gear  Oil 1000 Height  High  Low

Pivot Blocks  Moulded (std)  Alloy

Screw Block Spacers

Wishbone Quik-Klips

Toe In  In-board  3°  Out-board  °

Ride Height (Chassis to Floor)

Droop  On 10mm Block  Axle Height


Anti-roll Bar  No  1.20  1.40  1.60

Camber  Positive  Negative

Link Washers  Under Ball  Under Bracket

Inboard Pin  Pro-Squat  Anti-Squat  Horizontal

Pivot Block Spacers

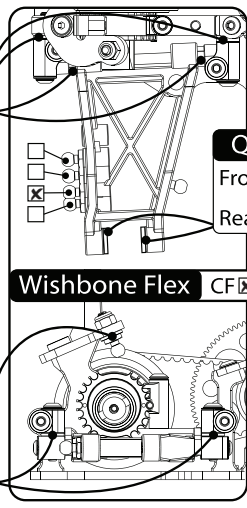

### Link Mount

1 Groove - 45mm

2 Groove - 42mm


3 Groove - 39mm

4 Groove - 37mm

### Qwik Clips

Front

Rear



### Rear Shocks

Oil

Springs

Piston Holes  2  3

length

Rebound