

## DRIVER AND EVENT DETAILS

Name Alex LAURENT  
 Date 12-13/06/2010  
 Event EC warm up Aniche  
 Weather Sunny  
 Result 20,4s 15 laps 5.13s

## CHASSIS AND ELECTRICS

Chassis 2mm  
 Top Deck std  
 Bodyshell PF LTCR light  
 Wing  
 E.S.C Tekin RS pro  
 Servo KO 2413  
 Receiver sanwa  
 Cells SMC

## TRACK CONDITIONS

Grip Level High  Medium  Low   
 Type Tight  Open  Both   
 Surface Carpet  Tarmac  Wood   
 Condition Smooth  Bumpy   
 Temperature 20 °C °F  
 Venue Indoor  Outdoor

## MOTOR AND GEARING

Motor PRT 4.5  
 Rotor Diameter 12  
 Timing 0  
 Gear Pitch 48Dp  64Dp   
 Spur Size 118  
 Pinion Size 26

### Transmission

Option 1  Option 2



## WHEELS, TYRES AND INSERTS

Wheels Schumacher  
 Tyres EC sorex 36  
 Inserts Yellow  
 Tyre Additive LRP  
 Additive Time 40 MIN (R) 40 MIN (F)  
 Tyre Warmers Yes  No

## DRIVER NOTES

Blank area for driver notes.


## Front Shocks

Oil 30 WT  
 Springs silver HB  
 Piston Holes 2  3   
 length 12  
 Rebound 50 %




## FRONT SETTINGS

Drive Diff  Spool  One-Way  Height High  Low


Servo Saver Yes  No  Yoke Flex X  M  STD   
 Pivot Blocks Moulded (std)  Alloy   
 Screw Block Spacers Front 1.5 mm Rear 1.5 mm  
 Wishbone Quik-Klips Front 2 mm Rear 2 mm  
 Toe In-Out In-board  Out-board  0°  
 Ride Height (Chassis to Floor) 4.75 mm  
 Droop On 10mm Block  Axle Height  35 mm  
 Anti-roll Bar No  1.20  1.40  1.60   
 Castor 0°  2°  4°  6°   
 Camber Positive  Negative  1 Deg  
 Link Washers Under Ball  Under Bracket  2 mm  
 Inboard Pin Kick-up  Anti-dive  Horizontal   
 Pivot Block Spacers Front 0.5 mm Rear 0.5 mm



Wishbone Flex CF  M




## Centre Track Rod

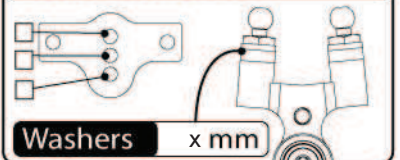

Washers x mm

## Link Mount


1 Groove   
 2 Groove   
 3 Groove




## REAR SETTINGS

Drive Height High  Low

Pivot Blocks Moulded (std)  Alloy   
 Screw Block Spacers Front 1 mm Rear 1 mm  
 Wishbone Quik-Klips Front 3mm Rear 1mm  
 Toe In In-board  3° Out-board   
 Ride Height (Chassis to Floor) 5,25 mm  
 Droop On 10mm Block  Axle Height  34 mm  
 Anti-roll Bar No  1.20  1.40  1.60   
 Camber Positive  Negative  1,5 Deg  
 Link Washers Under Ball  Under Bracket  1 mm  
 Inboard Pin Pro-Squat  Anti-Squat  Horizontal   
 Pivot Block Spacers Front mm Rear 0mm





Wishbone Flex CF  M




## Link Mount

1 Groove   
 2 Groove   
 3 Groove



1.4mm   
 2.4mm   
 3.4mm   
 4.4mm



## Rear Shocks

Oil 35 WT  
 Springs silver HB  
 Piston Holes 2  3   
 length 12  
 Rebound 50 %