

SETUP SHEET




TRACK CONDITIONS

Type : Carpet Asphalt
 Place : Indoor Outdoor
 Surface: Smooth Med. Bumpy
 Size: Open Med. Tight
 Traction: High Med. Low
 Track Temp/Air Temp: 30 / 25
 Note: 1 tour délicat, après nickel


FRONT SUSPENSION

Track Width: _____ mm Gear Diff Ride Gomme-45 wt
 Toe Angle: 0.5 ° Ball Diff
 Caster: 4 ° One Way
 Camber: 2- ° Solid Axle
 Ride Height: 5.4 mm Anti-Roll Bar: Ø 1.4 mm
 Down Stop: 36 mm

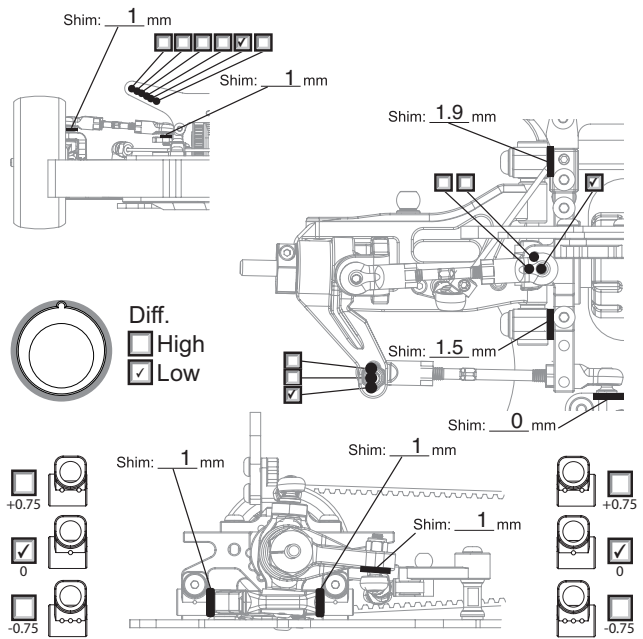


REAR SUSPENSION

Track Width: _____ mm Gear Diff 1000 wt
 Toe Angle: 1.4mm ° Ball Diff
 Camber: 2+ ° Solid Axle
 Ride Height: 5.4 mm
 Down Stop: 35.5 mm Anti-Roll Bar: Ø 1.2 mm

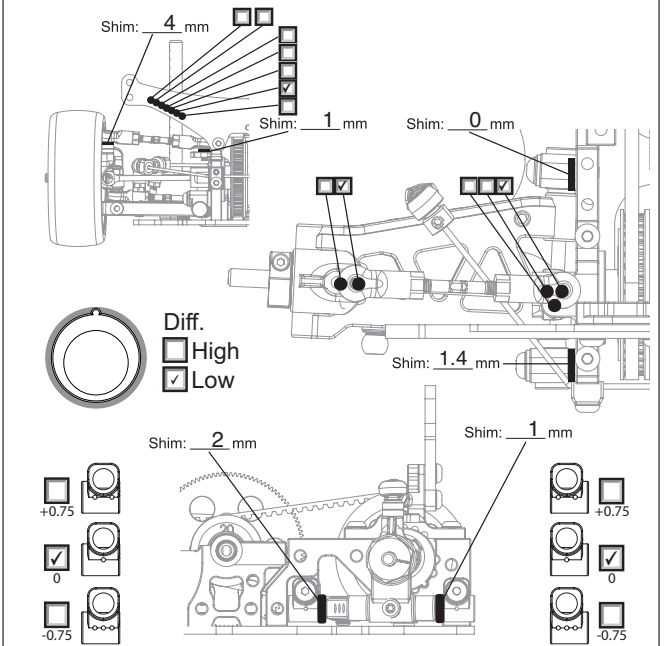

STIFF SETTING

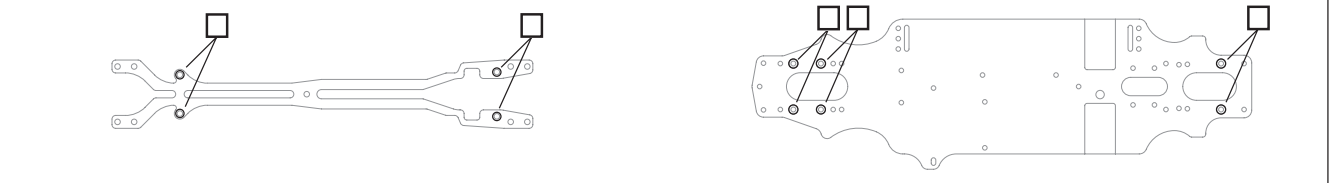

ELECTRONICS


Servo: BLS551
 ESC: PRT10
 Battery: IP 6200

DRIVE RATIO


Spur 96 T
 Pinion 41 T X1.9 = 4.45

TIRES

Insert : Ride 26006
 Wheel: Ride 26006
 Shore/deg: 36
 Compound: Ride
 Tire Temp: 50
 Tire additive: -
 Treated Area



SHOCKS

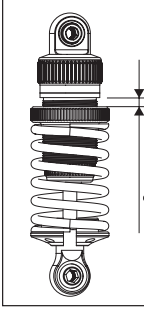

Hole Size: F stock R stock
 Holes In Piston: F 2 R 2
 Oil wt: F 600 TM R 600 TM
 Springs: F 27 R 25
 Rebound: F 0 R 0
 Bladder Note: _____
 Thread Length: F 1.4 R 1.5

ESC

Punch: 1-1-2 +15% Expo
 Initial Brake: -60% Expo
 Drag Brake: 0
 ESC Timing Turbo Timing
Zero

BODY



Body: P37R
 Wing Height: Efra
 Wing Position: RR