


TRACK CONDITIONS

Type: Carpet Asphalt Size: Open Med. Tight
 Place: Indoor Outdoor Traction: High Med. Low
 Surface: Smooth Med. Bumpy Track Temp/Air Temp: _____ / _____

Note: New Team Magic progressive springs



FRONT SUSPENSION

Track Width: _____ mm Gear Diff _____ wt
 Toe Angle: +1 ° One Way
 Caster: 4 ° Spool
 Camber: 1.5 °
 Ride Height: 5 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.7 mm

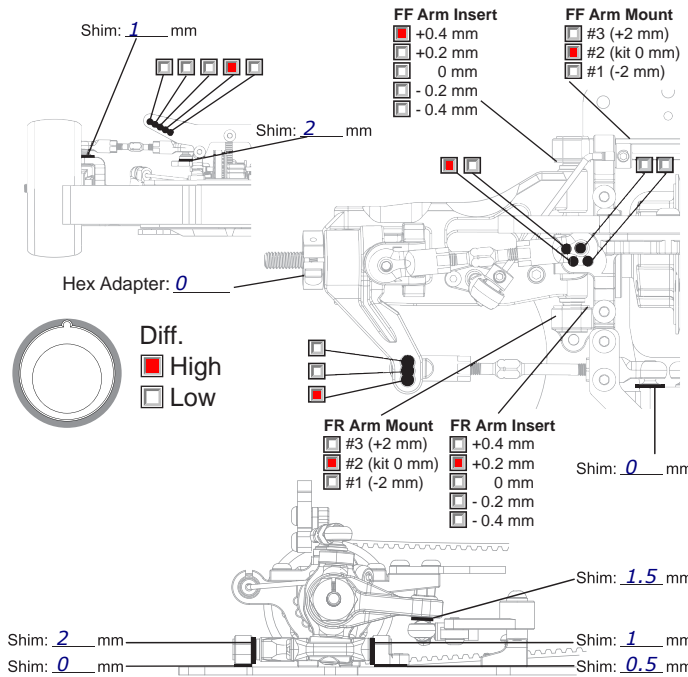

REAR SUSPENSION

Track Width: _____ mm Gear Diff 10'000 wt
 Toe Angle: -2.5 °
 Camber: 1.5 °
 Ride Height: 5.2 mm
 Down Stop: 4.7 mm Anti-Roll Bar: Ø 1.3 mm

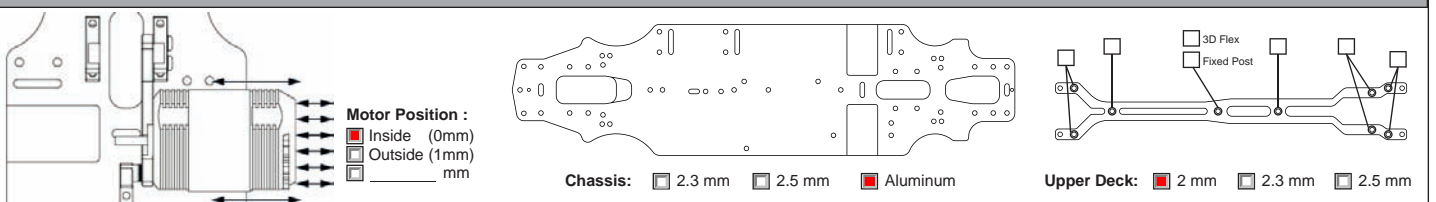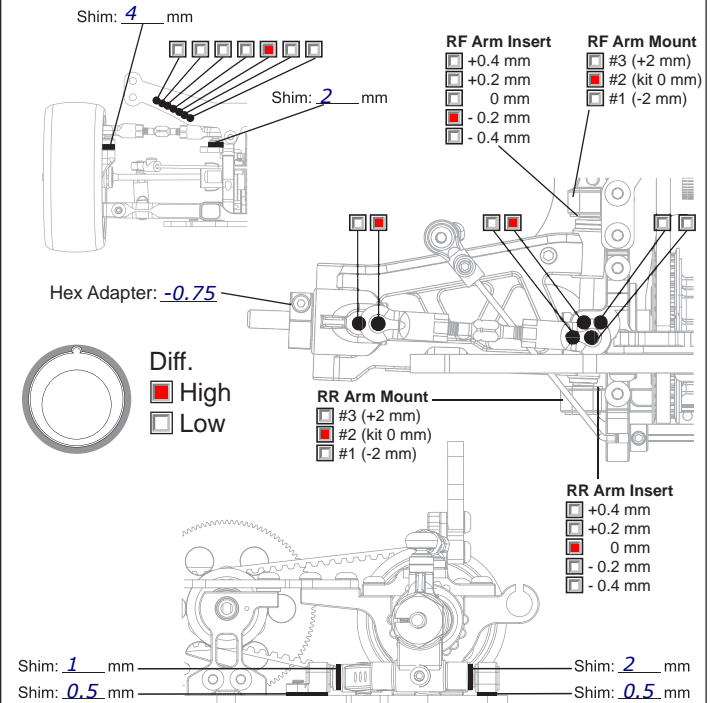

ELECTRONICS

Servo: Sanwa
 ESC: Hobbywing
 Battery: LRP

MOTOR

Brand: PRT
 Turns: 5.5
 Timing: _____

ESC


Punch: _____
 Initial Brake: _____
 Drag Brake: _____
 ESC Timing Turbo Timing

DRIVE RATIO


Spur 110 T
 Pinion 26 T $\times 1.9 =$ 8.04

TIRES

Insert: Volante 28 / 27g
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: _____
 Tire additive: _____
 Treated Area



SHOCKS

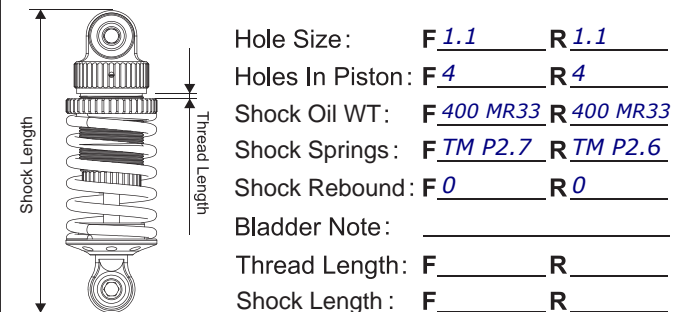

BODY

