

SETUP SHEET




TRACK CONDITIONS

Type: Carpet Asphalt Size: Open Med. Tight
 Place: Indoor Outdoor Traction: High Med. Low
 Surface: Smooth Med. Bumpy Track Temp/Air Temp: 35 / 28

Note: Front Split susp. block.



FRONT SUSPENSION

Track Width: _____ mm Gear Diff _____ wt
 Toe Angle: +0.5 ° One Way
 Caster: 4 ° Spool
 Camber: 1.8 °
 Ride Height: 5.2 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.8 mm

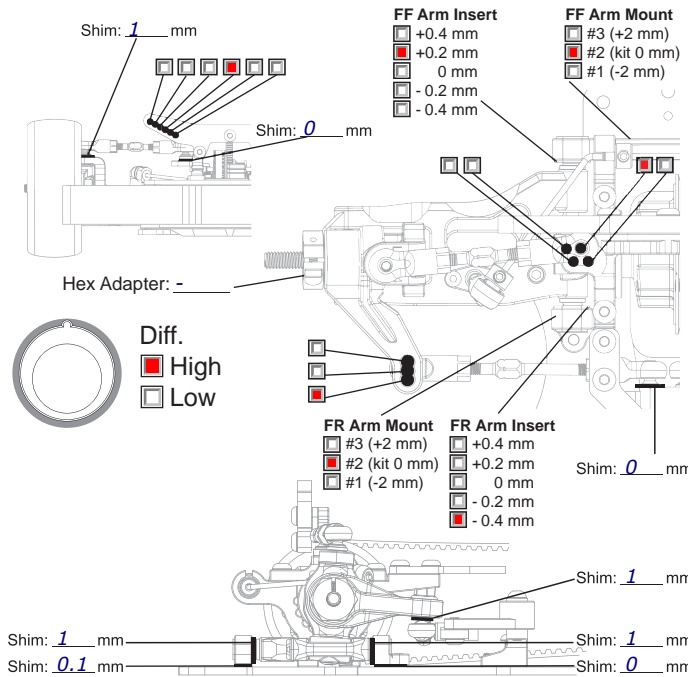

REAR SUSPENSION

Track Width: _____ mm Gear Diff 1000 wt
 Toe Angle: _____ °
 Camber: 1.8 °
 Ride Height: 5.4 mm
 Down Stop: 4.5 mm Anti-Roll Bar: Ø 1.3 mm

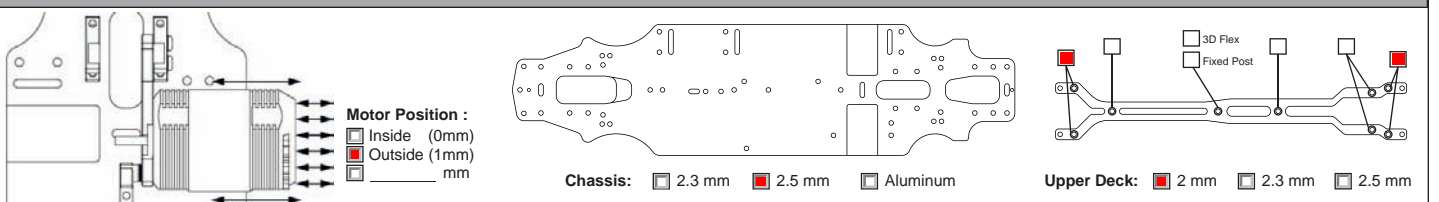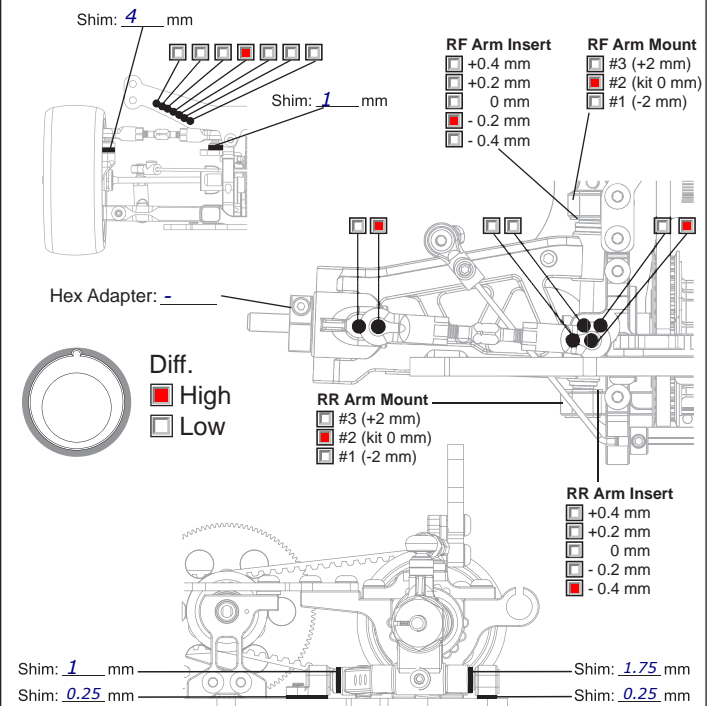

ELECTRONICS

Servo: HRC
 ESC: Much More
 Battery: Much More

MOTOR

Brand: Much More
 Turns: 13.5
 Timing: Fixed

ESC


Punch: Blinky
 Initial Brake: _____
 Drag Brake: 0
 ESC Timing Turbo Timing

DRIVE RATIO


Spur 74 T
 Pinion 35 T $\times 1.9 =$ 4.02

TIRES

Insert: Sorex 32
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: 55
 Tire additive: HRC 6001 (20min.)
 Treated Area



SHOCKS

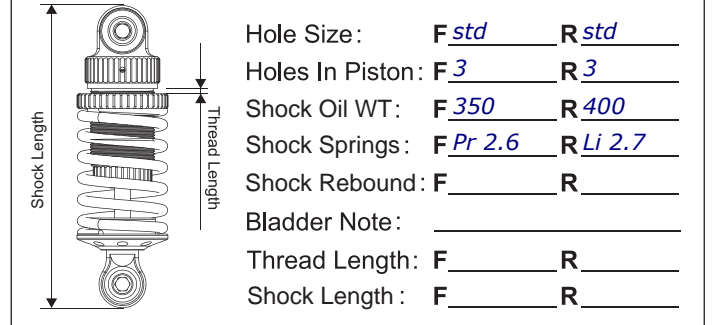

BODY

