

SETUP SHEET




TRACK CONDITIONS

Type: Carpet Asphalt Size: Open Med. Tight
 Place: Indoor Outdoor Traction: High Med. Low
 Surface: Smooth Med. Bumpy Track Temp/Air Temp: _____ / _____

Note: TQ 15 tours 5'06"20



FRONT SUSPENSION

Track Width: _____ mm Gear Diff _____ wt
 Toe Angle: 1 ° One Way
 Caster: 4 ° Spool
 Camber: -2 °
 Ride Height: 5.2 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.5 mm

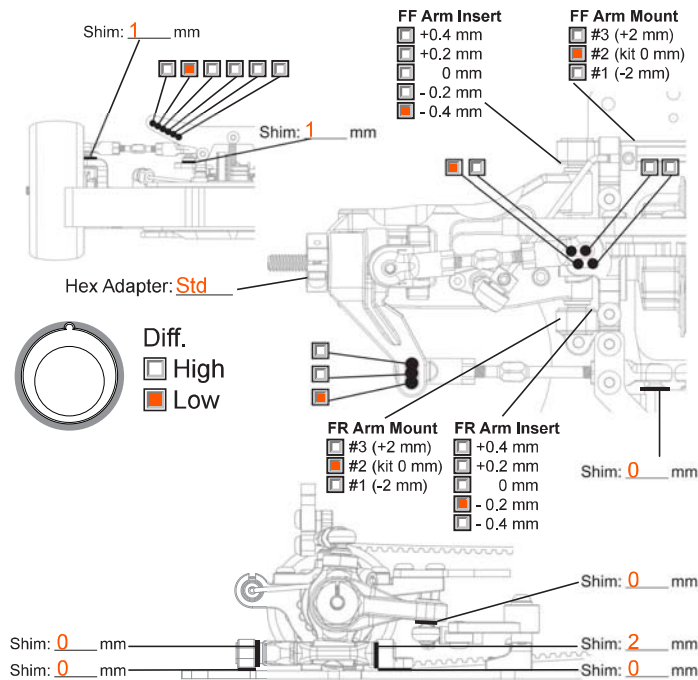

REAR SUSPENSION

Track Width: _____ mm Gear Diff 3000 wt
 Toe Angle: -2.5 °
 Camber: -2.3 °
 Ride Height: 5.6 mm
 Down Stop: 4.5 mm Anti-Roll Bar: Ø 1.2 mm

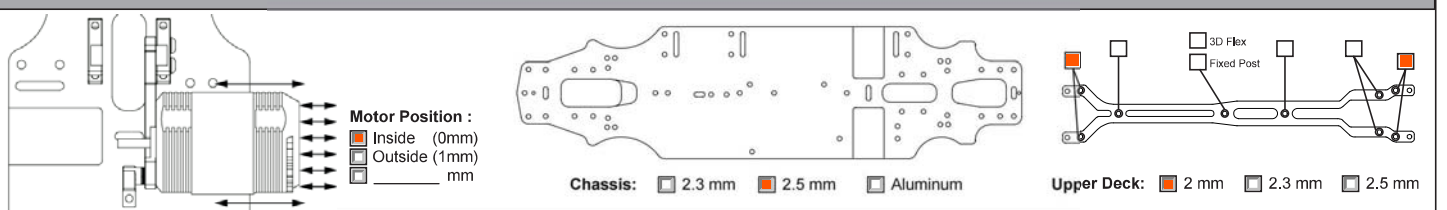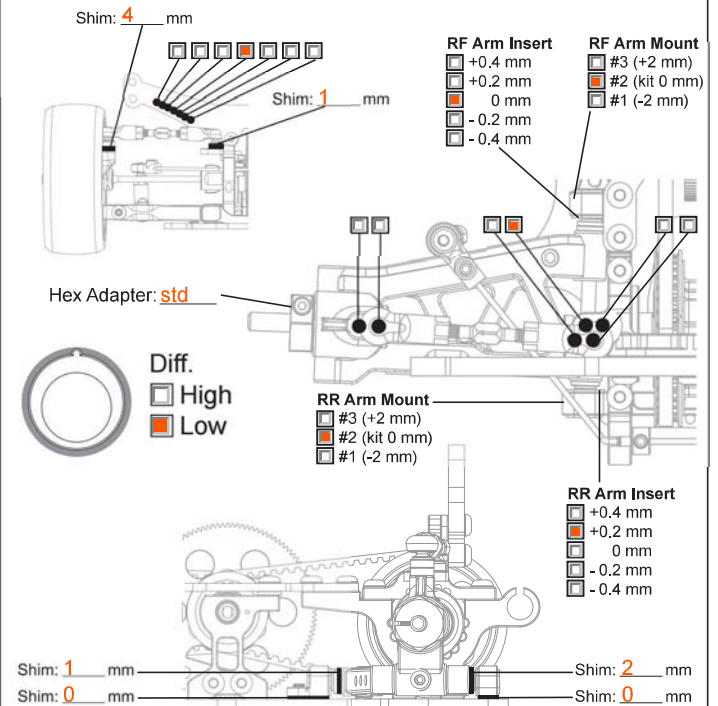

ELECTRONICS

Servo: KO BSX-2 Response
 ESC: Orion R10 pro
 Battery: Much more 6000 SP2

MOTOR

Brand: Fantom Racing Ion V4
 Turns: 10.5
 Timing: 55

ESC

Punch: 9
 Initial Brake: 0
 Drag Brake: 0
 ESC Timing Turbo Timing


DRIVE RATIO

Spur 102 T
 Pinion 43 T $\times 1.9 = 4.51$


TIRES

Insert: Panaracer 36
 Wheel: Panaracer 36
 Shore/deg: 36
 Compound: _____
 Tire Temp: 65
 Tire additive: MR33

Treated Area



SHOCKS

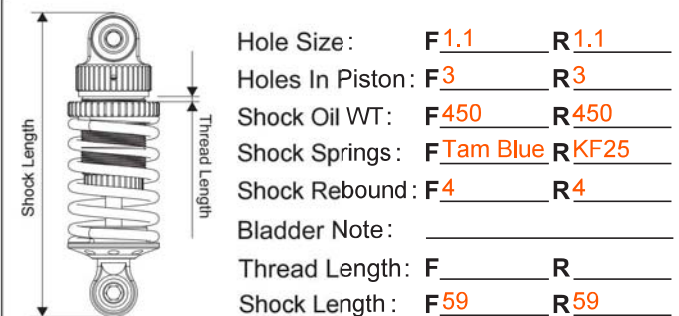

BODY

