

TEKIN

RS SETUP SHEET


RS & RS PRO

DRIVER: Kenny Lambert
VEHICLE: Speed Merchant Rev 5
TRACK: IIC 2009 Vegas Race
SURFACE: Carpet
TRACTION: LOW MED HIGH

MOTOR: 13.5
ENDBELL TIMING: 0
ROTOR: 12.5
GEARING: 3.04
BATTERY: Thunderpower 1s

ESC SETTINGS:

FILL IN LED LOCATION AND WRITE IN SETTING NUMBER

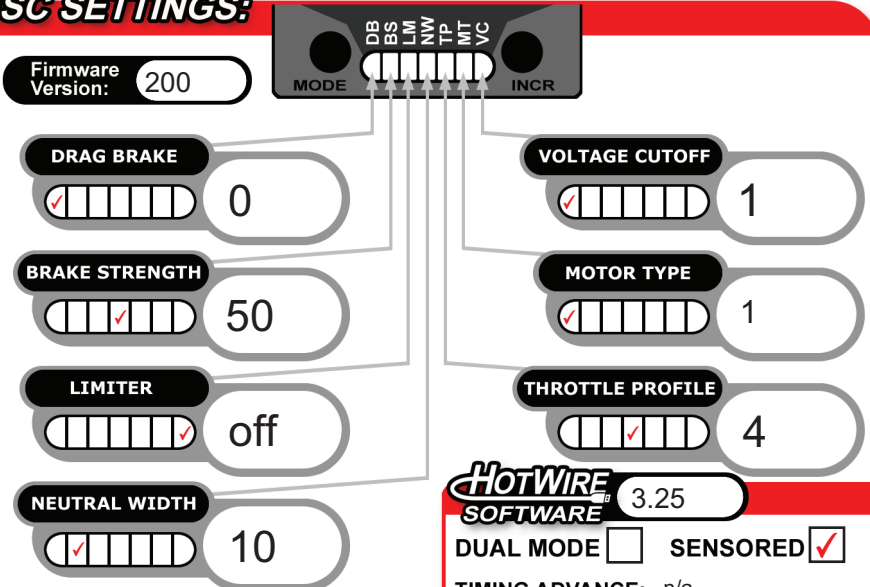

The diagram shows a central ESC unit with a MODE knob on the left and an INCR knob on the right. Between them are seven LEDs labeled DB, BS, LM, NW, TP, MT, and VC. Lines connect these LEDs to various settings on the page. The settings are:

- Firmware Version: 200
- DRAG BRAKE: 0 (LED DB)
- BRAKE STRENGTH: 50 (LED BS)
- LIMITER: off (LED LM)
- NEUTRAL WIDTH: 10 (LED NW)
- VOLTAGE CUTOFF: 1 (LED TP)
- MOTOR TYPE: 1 (LED MT)
- THROTTLE PROFILE: 4 (LED VC)

HOTWIRE SOFTWARE 3.25

DUAL MODE SENSORED

TIMING ADVANCE: n/a

REVERSE STRENGTH: n/a

PUSH CONTROL: off

TIMING BOOST: 25

TURBO BOOST: 20 TURBO DELAY: .2

NOTES:

Blank lined area for notes.