

TEKIN

RS SETUP SHEET


RS & RS PRO

DRIVER: Mike Dumas
VEHICLE: Speed Merchant 1/12
TRACK: IIC 2009 Vegas Race
SURFACE: Carpet
TRACTION: LOW MED HIGH

MOTOR: Tekin Redline 3.5
ENDBELL TIMING: 0
ROTOR: 12.5
GEARING:
BATTERY: 1s Lipo

ESC SETTINGS:

FILL IN LED LOCATION AND WRITE IN SETTING NUMBER

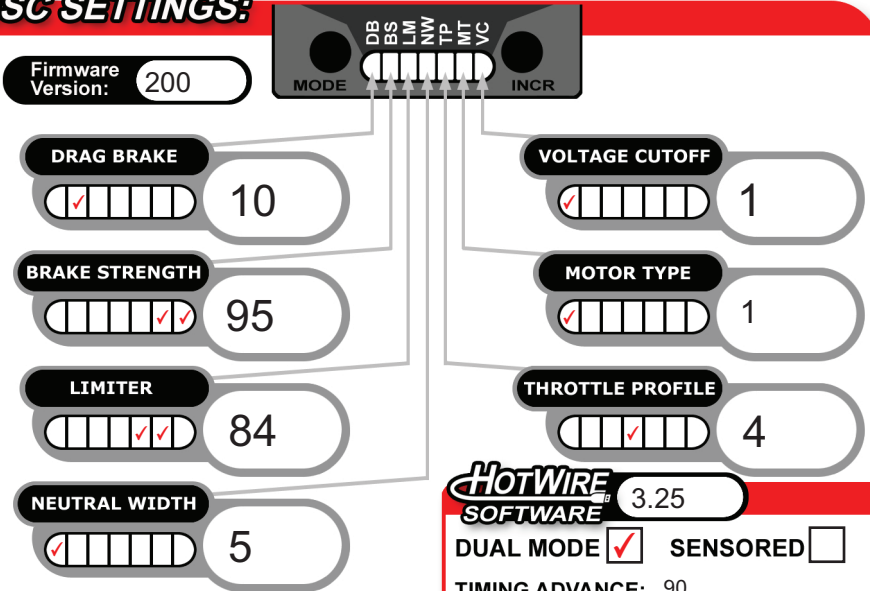

The diagram shows an ESC with a MODE knob and an INCR knob. Between them are seven LEDs labeled DB, BS, LM, NW, TP, MT, and VC. Lines connect these LEDs to various settings: DB to Drag Brake, BS to Brake Strength, LM to Limiter, NW to Neutral Width, TP to Throttle Profile, MT to Motor Type, and VC to Voltage Cutoff.

Firmware Version: 200

DRAG BRAKE: 10

BRAKE STRENGTH: 95

LIMITER: 84

NEUTRAL WIDTH: 5

VOLTAGE CUTOFF: 1

MOTOR TYPE: 1

THROTTLE PROFILE: 4

HOTWIRE SOFTWARE 3.25

DUAL MODE SENSORED

TIMING ADVANCE: 90

REVERSE STRENGTH: n/a

PUSH CONTROL: off

TIMING BOOST: n/a

TURBO BOOST: TURBO DELAY:

NOTES:

Good power throughout the entire run. Motor temp 120°f.
