


PHOTON SETUP RECORD



Name: _____ Date: _____ Track: _____

Condition: _____ Temperature: _____

- Rubber Asphalt Edition
- Foam Carpet Edition

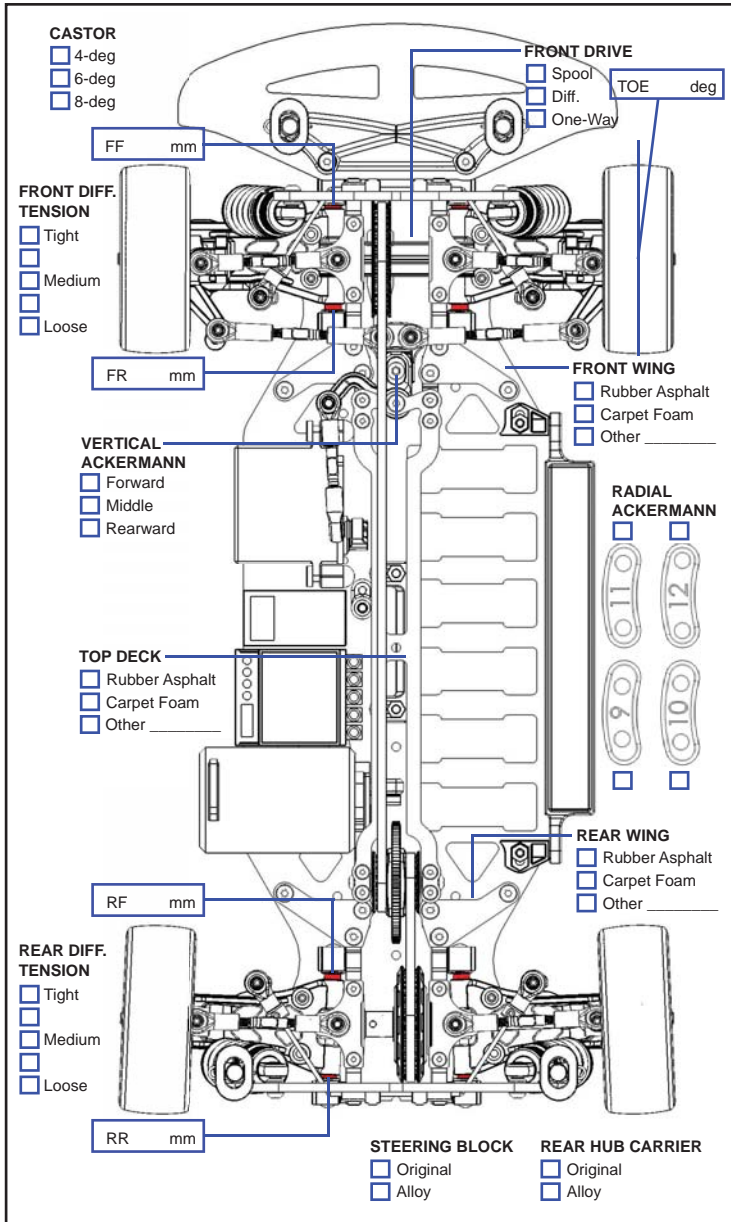

MARK POSITION

1.0mm 2 holes 1.2mm 2 holes

1.0mm 3 holes 1.2mm 3 holes

FRONT MEASUREMENTS		FRONT SHOCKS	
RIDE HEIGHT	mm	OIL WEIGHT	wt
CAMBER ANGLE	deg	PISTON	Standard/Optional
DROOP	mm	BLADDER	
WHEEL HUBS	mm	SPRING	
WHEEL SPACER	mm	NOTE	

MARK POSITION

1.0mm 2 holes 1.2mm 2 holes



1.0mm 3 holes 1.2mm 3 holes

REAR MEASUREMENTS		REAR SHOCKS	
RIDE HEIGHT	mm	OIL WEIGHT	wt
CAMBER ANGLE	deg	PISTON	Standard/Optional
DROOP	mm	BLADDER	
WHEEL HUBS	mm	SPRING	
WHEEL SPACER	mm	NOTE	

MOTOR			
SPUR GEAR			
PINION GEAR			
BATTERY			
BODY SHELLS			
WING			
ESC SETTING			

	FRONT	REAR
BRAND		
COMPOUND		
INSERT		
WHEEL		
TIRE TREATMENT		

FL FR RL RR

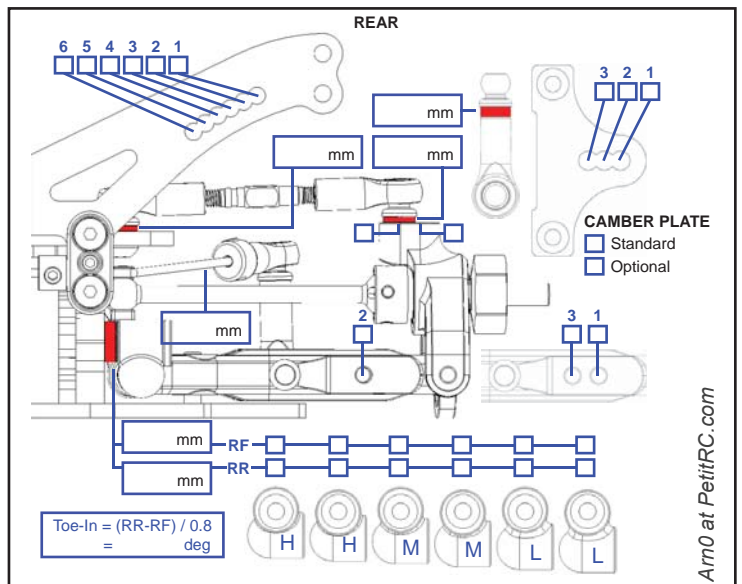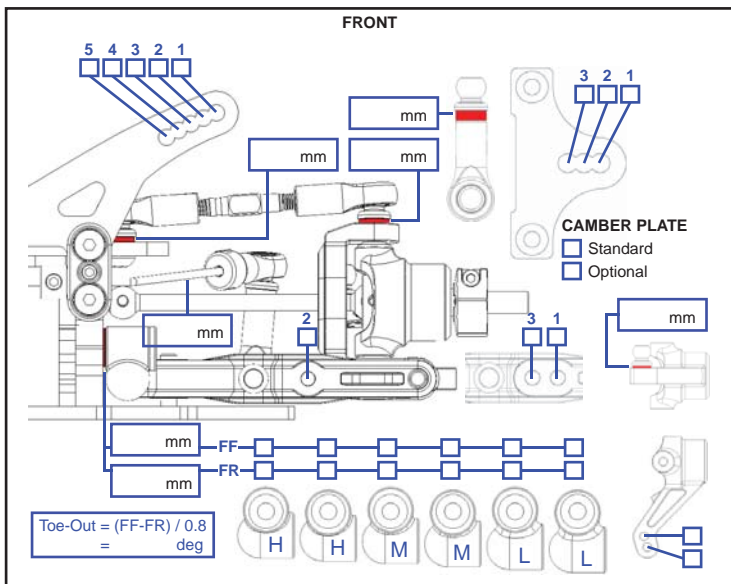

Arm0 at PetitRC.com

Notes:

stiff lipo chassis; middle screws on bulk left out; cut middle stand off of bulks; screw in the middle of motor mount switched for set screw; inner screws on topdeck left away; no lipo holder(alu) or battery tray used; sevo fixed with shoe goo, no servo mount; no servo saver; alloy-carbon steering with no spacer under the arm and alloy camber plates used; expo on transmitter: -25%;

Shockshafts cut for overall length of 61.5mm;

Used gear diffs front and rear