

セッティング記録 / SETUP RECORD




名前: EJ Evans  
 国籍: USA

日付: 2012  
 条件: \_\_\_\_\_

トラック: Asphalt  
 温度: \_\_\_\_\_

Bump bladder w/ 6mm distance between Bottom of shock and top of Ball cup  
 About 30% rebound

FRONT DRIVE  Spool  Gear Diff.  Ball Diff.  One-Way Note: \_\_\_\_\_

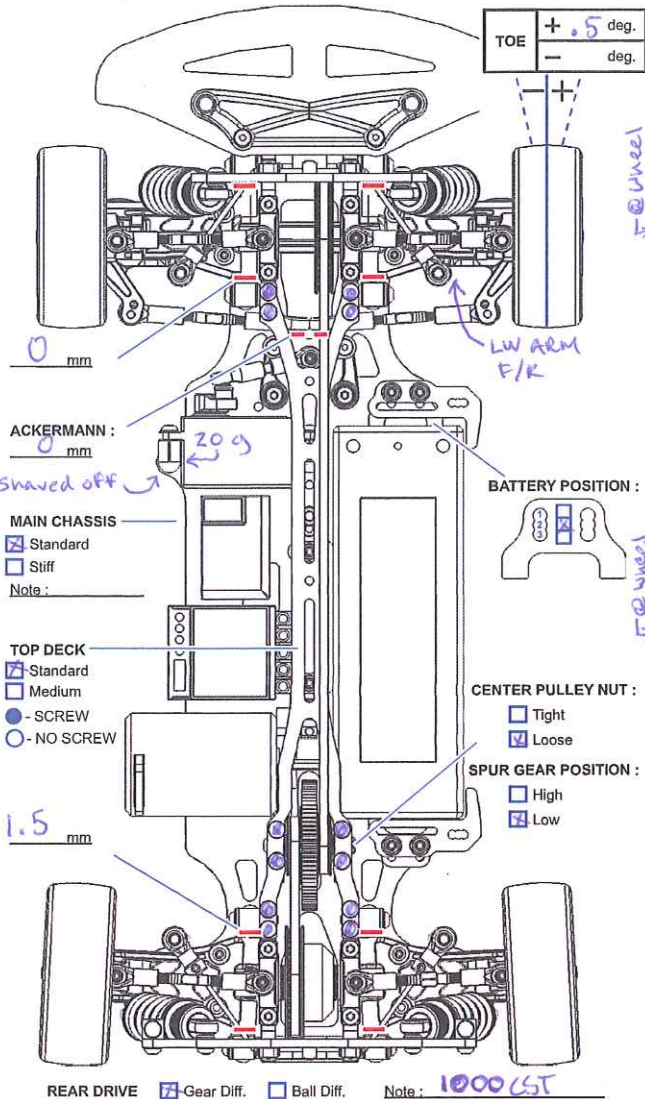

FRONT MEASUREMENTS

RIDE HEIGHT	<u>5</u> mm
CAMBER ANGLE	<u>1.5</u> deg
DOG BONE	<u>HPL DCJ</u> mm
WHEEL HUBS	<u>STD</u> mm
WHEEL SPACER	<u>None</u> mm

FRONT SHOCKS

Standard  Optional

3 hole 1.0 mm

OIL WEIGHT	<u>55 ASSC</u> wt
BLADDER	<u>STD</u>
SPRING	<u>367 gf</u>
NOTE	<u>Kyosho oring</u>

REAR MEASUREMENTS

RIDE HEIGHT	<u>5.5</u> mm
CAMBER ANGLE	<u>1.5</u> deg
DOG BONE	<u>44.5</u> mm
WHEEL HUBS	<u>STD</u> mm
WHEEL SPACER	<u>None</u> mm

REAR SHOCKS

Standard  Optional

3 hole 1.0 mm

OIL WEIGHT	<u>45 ASSC</u> wt
BLADDER	<u>STD</u>
SPRING	<u>306</u>
NOTE	<u>Kyosho oring</u>

MOTOR			FRONT	REAR
SPUR GEAR		BRAND		
PINION GEAR		COMPOUND		
BATTERY		INSERT		
BODY SHELLS	<u>LTC-R</u>	WHEEL		
WING	<u>Light weight</u>	TIRE TREATMENT		
ESC SETTING				

