"Scythe" 1/10 Scale EP Touring Car

Fastest Lap sec

Name | Date | Humidity % | Air Temp. °C

Track | Track Condition bad 1 2 3 4 5 good | Track Temp. °C

Front Suspension

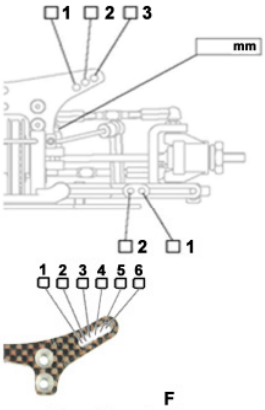

Camber Angle °

Castor °

Ride Height mm

Droop mm

Front Drive ☐ One Way ☐ Spool ☐ Differtial

Stabilizer Bar mm

Stick out mm

Toe Angle °

Notes

Sus. Mount F R

Sus. Mount Spacer F mm R mm

Rear Suspension

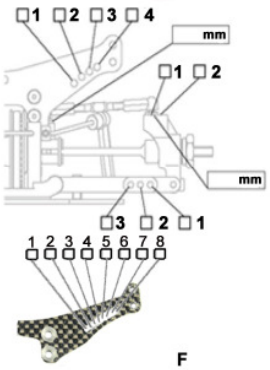

Camber Angle °

Ride Height mm

Droop mm

Stabilizer Bar mm

Stick out mm

Upright Spacer F mm R mm

Notes

Sus. Mount F R

Sus. Mount Spacer F mm R mm

Ackermann

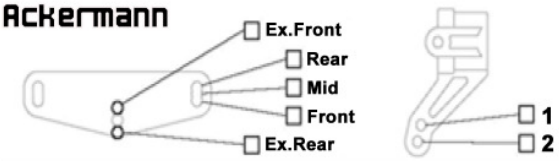

Radio

Transmitter

Receiver

Servo

ESC

Shock Absorber

	Front	Rear
Piston & Holes		
Oil		
Spring		
Diaphragm		
Form		
Other		

Tire

	Front	Rear
Brand		
Insert		
Wheel		
Additive		

Spreaded Area

FL. FR. RL. RR.

Power Source

Motor

Battery

Rotor

Brush

Spring

Timing

Gear Ratio

Spur

Pinion ÷

2nd Reduction x 2.200

Over All Ratio

Body

Wing

Features

Chassis	☐ 2 mm	☐ 2,5mm	☐ 3,0mm	☐ 2,5 mm U.S.Spec. ☐ 3,5 mm X-Stiff
Upper Plate	☐ 2 mm	☐ 2,5 mm		
Damper Stay	☐ 3 mm	☐ 3,3 mm U.S.Spec.		☐ Low Profile
Motor Pod Base	☐ Plastic	☐ Aluminium		
Motor Pod RH	☐ Plastic	☐ Aluminium		
Bulk Heads	☐ Plastic	☐ Aluminium		
Bulk Head Cover	☐ Plastic	☐ Aluminium		
Belts	☐ Original	☐ Low Friction		
Ackermann	☐ 2 mm	☐ 3,0 mm U.S. Spec.		
Bearings	☐ Original	☐ Ceramic		☐ Other _____
Differential	☐ Original	☐ Aluminium Hop-Up		☐ Other _____

Other Features _____