


# "Scythe" Setup Sheet for RC-Drifting.com

Name Wolfgang Meissl Date 05/07/07 Humidity % Air Temp. 27 °C  
Track Klagenfurt Track Condition bad 1 ② 3 4 5 good Track Temp. 41 °C

## Front Suspension

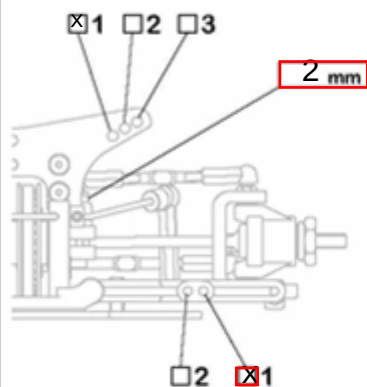

Camber Angle 1.5 °  
Caster 4 °  
Ride Height 5.0 mm  
Drop 5 mm  
FR. Drive Oneway  
Stabilizer Bar Stick out 2 mm  
Toe Angle -0.5 °

Notes


Sus. Mount F 2.5  
R 0

Sus. Mount Spacer F 1 mm  
R 1 mm

## Shock Absorber

|                | Front        | rear     |
|----------------|--------------|----------|
| Piston & Holes | 2+ 1.2mm     | 2+ 1.2mm |
| Oil            | 40wt         | 40wt     |
| Spring         | Ah310g       | Ah290g   |
| Diaphragm      | std          | std      |
| Form           |              |          |
| Other          | 100% rebound | 100%     |

## Rear Suspension

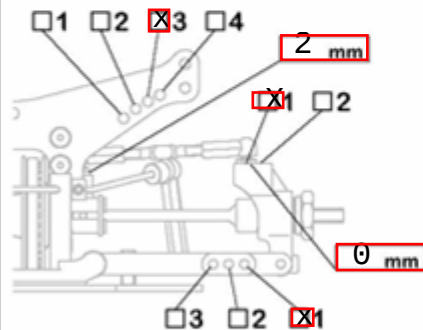



Camber Angle 1.5 °  
Ride Height 5.5 mm  
Drop 4 mm  
Stabilizer Bar Stick out 1.8 mm  
Upright Spacer F 0 mm  
R 0 mm

Notes

Sus. Mount F 0  
R 2.5

Sus. Mount Spacer F std mm  
R std mm

## Ackermann

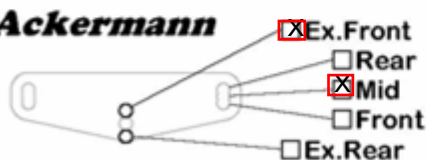

## Radio

Transmitter Sanwa M11

Receiver Nosram Genemi

Servo Futaba 9550i

ESC Nosram Evolution


## Tire

|        | Front             | rear    |
|--------|-------------------|---------|
| Brand  | Vtec30R           | Vtec30R |
| Insert | Top Racing X-Firm |         |

Wheel

Additive Vtec Asphalt

Spread Area

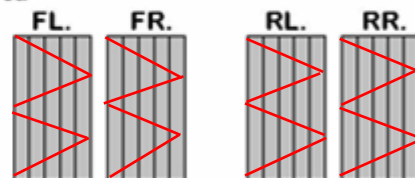

## Power Source

Motor Lrp23T Battery SMC IB4200

Rotor

Brush P-Kohlen

Spring Std

Timing

## Gear Ratio

Spur 102  
Pinion ÷ 34  
2nd Reduction × 2.200  
Over All Ratio 6,60

## Body

Mazda 6 Hot Bodies

## Wing

Flattest