


"Scythe" Setup Sheet for _____

Name Patrick van der Knaap Date 30 december 2006 Humidity % Air Temp. °C
Track Viol Indoor (Germany) Track Condition bad 1 2 3 4 5 good Track Temp. °C

Front Suspension

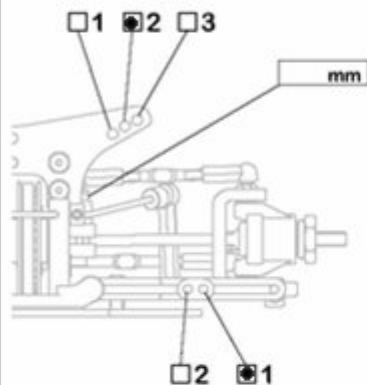

Camber Angle 1.5 °

Caster 4 °

Ride Height 5 mm

Drop 6 mm

FR. Drive

Stabilizer Bar ϕ
Stick out mm

Toe Angle 0 °

Notes

2.5 degree block used

Sus. Mount F R

Sus. Mount Spacer F R mm mm

Shock Absorber

Front

rear

Piston & Holes

Oil


Spring

Diaphragm

Form

Other

Rear Suspension

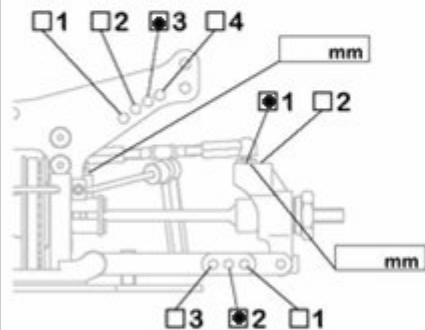

Camber Angle 2 °

Ride Height 5.5 mm

Drop 5 mm

Stabilizer Bar ϕ
Stick out mm

Upright Spacer F R mm mm

Notes

Sus. Mount F R

Sus. Mount Spacer F R mm mm

Tire

Front

rear


Brand cs 27

Insert orion blue



Wheel jb discs

Additive corally jack the gripper indoor

Spread Area

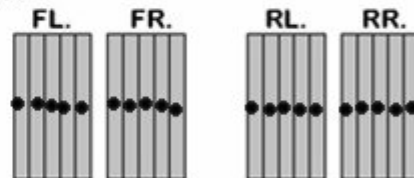

Ackermann

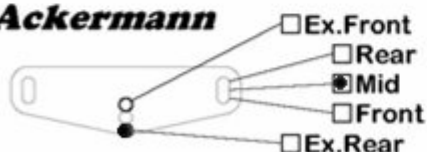

Radio

Transmitter

Receiver

Servo

ESC

Power Source

Motor 27T GM Brilliant

Battery smc 4200 shv

Rotor

Brush

Spring

Timing 24

Gear Ratio

Spur 78

Pinion 29 ÷

2nd Reduction x 2.200

Over All Ratio 5.9

Body

Mazda 6

Wing

Mazda 6 standard wing