

FACTORY SETUP SHEET

A215

DATE

DRIVER

TRACK

TRACK CONDITIONS

☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove
☐ Wet ☐ Low Bite ☐ High Bite ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy
☐ Dry ☐ Dusty ☐ Wed Bite ☐ Other

ENGINE

Gasket

mm

Plug

Muffler

Fuel

Clutch bell

☐ 16T

☐ 17T

☐ 18T

☐ Other

T

Shoes

☐ 3

☐ 4

Spring

mm

DIFF

Front

Oil #

Center

Oil #

Rear

Oil #

T

x

T

Spur gear


T

T


x

T

FRONT SUSPENSION

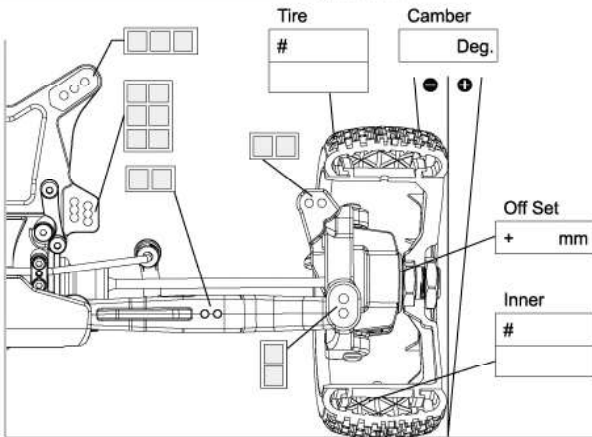

FRONT TOE ANGLE | CASTER ANGLE

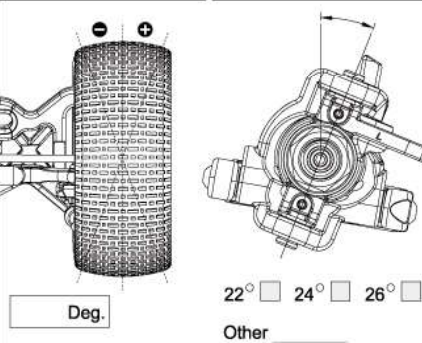

FRONT SHOCK

Oil

#

PISTON

#0096-0615

6x1.5mm

#0096-0812

8x1.2mm

#0096-0813

8x1.3mm

others

CONE OF PISTON

DOWN

UP

SHOCK SPRINGS

#9680

Black-Red dot


#9685

Black-Orange dot

#9690

Black-Yellow dot

others

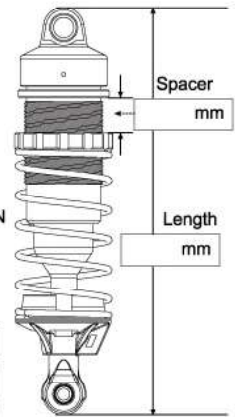

KICK UP

FF



FR



ANTI ROLL BAR

FRONT

#8019 U Type 1.9mm

#8021 U Type 2.1mm


#8022 U Type 2.2mm

#8023 U Type 2.3mm

#8024 U Type 2.4mm

#8025 U Type 2.5mm

others



ANTI SQUAT

TOE ANGLE


RF




RR




REAR SUSPENSION

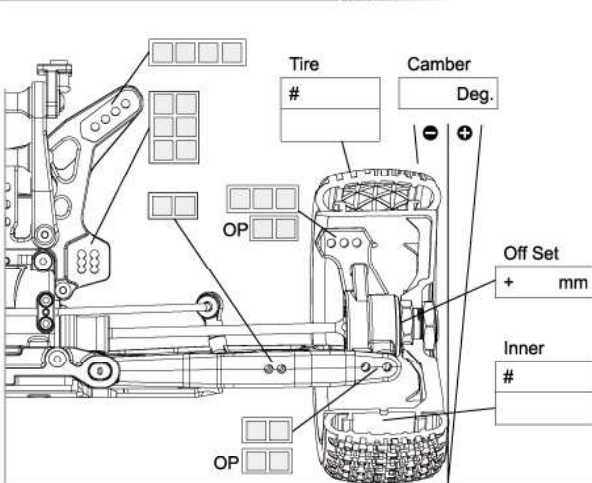

WHEEL BASE

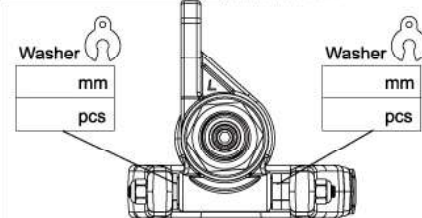

WING POSITION



ANTI ROLL BAR

REAR

#8322 U Type 2.2mm

#8323 U Type 2.3mm

#8324 U Type 2.4mm


#8325 U Type 2.5mm

#8326 W Type 2.6mm

#8328 W Type 2.8mm

#8330 W Type 3.0mm

others



REAR SHOCK

Oil

#

PISTON

#0096-0615

6x1.5mm

#0096-0812

8x1.2mm

#0096-0813

8x1.3mm

others

CONE OF PISTON

DOWN

UP

SHOCK SPRINGS

#9785

Black-Red dot


#9790

Black-Orange dot

#9795

Black-Yellow dot


others

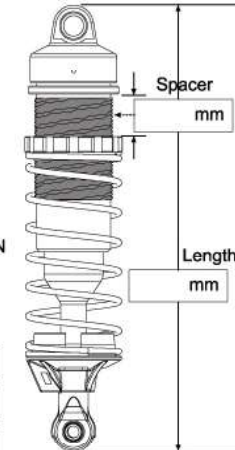

ACKERMAN



RIDE HEIGHT

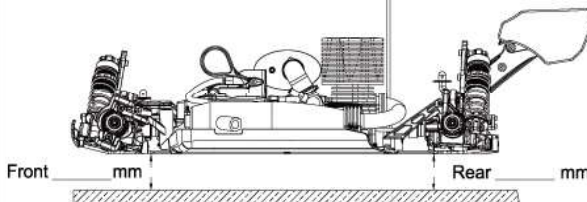

DROOP LIMITER

