


20 TEAM ASSOCIATED RC10T2 SETUP SHEET

DATE _____
 DRIVER _____
 TRACK NAME _____
 EVENT _____

FRONT	REAR
TIRE	
WHEEL	
FOAM INSERT	
CAMBER	
TOE-IN	

SHOCK LENGTH	
SHAFT LENGTH	
TRAVEL LIMITER	
PISTON	
OIL	
SPRING	

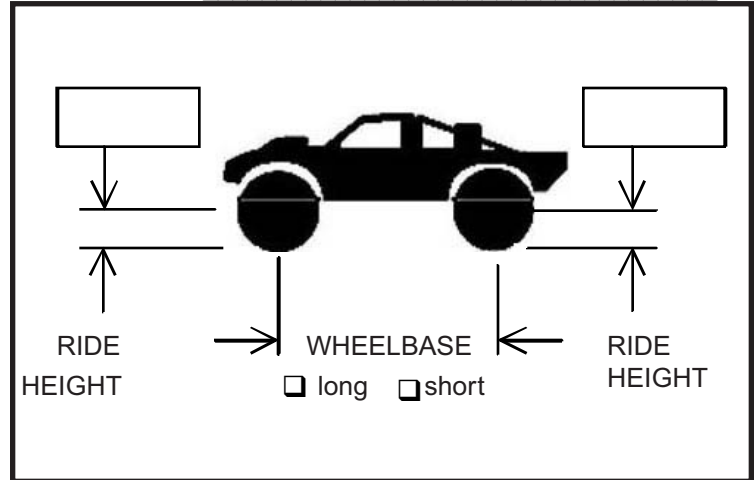

FRONT SHOCK POSITION	FRONT A-ARM	REAR SHOCK POSITION	REAR A-ARM
ARM ☐ 0° MOUNT ☐ 1.5° TOE-IN ☐ 3°	HUB ☐ 0° CARRIER ☐ 1.5° TOE-IN ☐ 3°	FRONT CASTER ☐ 20° ☐ 25° ☐ 30°	REAR LINK POSITION
ANTI SQUAT ☐ std ☐ other (specify): _____			

BELLCRANK TYPE	CHASSIS
STEERING BLOCKS	
BUMP STEER SPACERS	
MOTOR TYPE	
GEAR RATIO	
BATTERY TYPE/# CELLS	
SLIPPERTYPE/SETTING	
BODY TYPE	SPOILER

OFF ROAD TRACK CONDITIONS:

smooth / bumpy
 hard packed clay -- wet / dry / dusty
 sandy -- wet / dry / dusty
 soft dirt -- wet / dry / dusty
 grassy -- wet / dry / dusty
 wet / damp
 other: _____

high / low traction
 artificial (describe): _____

RACE COMMENTS:

BUGGY COMMENTS: