

Front Suspension:

Reset Forms

Ride Height:	27 mm (Body Off)
Camber:	-1°
Toe:	0°
Arm Type:	#71103 Flat, Standard
Tower Type:	#71115 Flat
Caster Block Insert:	0°
Steering Block:	4
Bulkhead Type:	#91658 Aluminum
Kick-Up Angle:	25°
Wheel Hex:	#71111 8.5 mm Kit
Notes:	#1366 FT Aluminum Servo Horn, 25T #91667 Plastic Steering Rack #91668 Aluminum Steering Bellcranks


Anti Roll Bar:

White (0.8mm)

Gray (0.9mm)

Blue (1.0mm)

Other: _____



Axle Height:

+3

+2


+1

0


Ball Stud Spacing: 1 mm

Steering Plate: #91680 +1

Steering Stop Spacing: 0



Caster Block Spacing: 1 mm

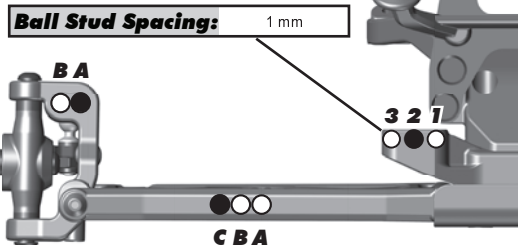

Rear Suspension:

Ride Height:	26 mm (Body Off)
Camber:	-1°
Arm Type:	#71105 Standard
Tower Type:	#71116 Standard
Wheel Hex:	#91610 7.0 mm
Hub Spacing:	Forward <input type="checkbox"/> Middle <input checked="" type="checkbox"/> Back <input type="checkbox"/>
Shock Mounting Position:	Front of Arm <input checked="" type="checkbox"/> Rear of Arm <input type="checkbox"/>
Notes:	

Anti Roll Bar:

White (1.2mm)

Gray (1.3mm)

Blue (1.4mm)

Other: _____

Rear Hub Link Setting:

Plastic Hub Aluminum Hub Ball Stud Spacing: 3 mm

Up Down

C Mount Inserts: 1° 0.5°

Aluminum Brass

D Mount Inserts: 1° 0.5°


Aluminum Brass



Hub Insert:

+3 +2 +1 0

Ball Stud Spacing: 3 mm

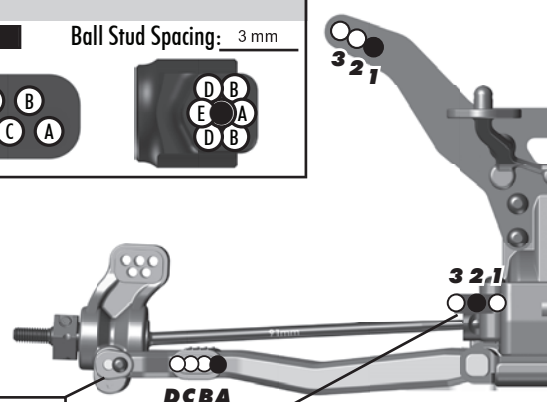

Electronics:

Radio:	Sanwa M12S	Servo:	#27101 Reedy 1508
EPA: Throttle:	100 %	Brake:	95 %
ESC:	#27004 Reedy Blackbox 510R		
ESC Settings:	See Setup Sheet		
Motor:	Reedy M3		
Wind:	#251 6.5	Timing:	20°
Pinion:	#1336 FT 18T	Spur:	81
Battery:	#27336 Reedy Zapper SG2 5800 mAh + #91744 FT Battery Weight 43g		
Battery Position:	3F		

Drivetrains:

Transmission:

3 Gear: Laydown:

4 Gear: Layback:

Differential:

Height: 2 Ball Diff:

Gear Diff:

Notes:


Slipper Clutch:

Type: Team Associated Kit

of Pads: 2 x #91197 LCF

Shocks:

	Front	Rear
Piston:	2 x 1.6 Flat Machined	2 x 1.7 Flat Machined
Fluid:	#5429 FT 35 wt	#5422 FT 30 wt
Spring:	#91637 Truck Gray	#91640 Truck White
Limiters:	2	1
Stroke:	28.5 mm	34.5 mm
Eyelet Length:	Long	Short
Cup Offset:	5 mm	5 mm
Notes:	#91494 Machined Shock Spacers V2	



Track Info:

Size: Small Medium Large Extra Large

Surface: Dirt Carpet Astroturf Multi Surface

Traction: Low Medium High Very High

Moisture: Dry Damp Wet

Condition: Indoor Outdoor Dusty Hard Packed

Bumpy Grooved Smooth Loamy

Temperature: Ambient: 55F Track: 55F

Notes:

Tires:

Front Tires: Pro-Line Electron

Front Compound: S3

Front Insert: Pro-Line Closed Cell

Rear Tires: Pro-Line Positron

Rear Compound: S3

Rear Insert: Pro-Line Closed Cell

Wheel (F/R): #7852 Team Associated 12mm Hex

Notes: Liquid Wrench Penetrating Oil

Body, Wing, Weight:

Body: #71126 Team Associated Kit

Servo Weights:

None Aluminum Steel Other

Electronic Weights: #91754 FT Graphite

None Aluminum Steel Other

Total Vehicle Weight: 1928g

Vehicle Comments:

Notes: #71102 Side Rails, Hard; #91620 & 91624 FT Chrome Shock Shafts; #91577 & #91579 Fox Shock Bodies; #91793 FT Differential Height Inserts;