


4XS SETUP SHEET

SHORTY PACK ☐

SADDLE PACK ☐

DRIVER: Top Trower DATE: 02/07/2016 AIR TEMP: _____ HUMIDITY: _____ %
 TRACK: West Coast TRACK CONDITION: Clay - low bite TRACK TEMP: 5°C
 FRONT WIDTH: STD 250mm REAR WIDTH: STD 245mm WHEELBASE: 293mm mm
 MOTOR: Tekin Gen3 6.5 SPUR GEAR: 83 PINION GEAR: 24 BATTERY: Thunder Power 3800mAh
 SERVO: BLS 551 WING: STD FRONT TIRE INSERT: Open Cell
 REAR TIRE INSERT: Open Cell FRONT ANTI ROLL BAR: Green mm REAR ANTI ROLL BAR: Green mm
 BEST LAP: 24.678s Average 25.3 second

FRONT

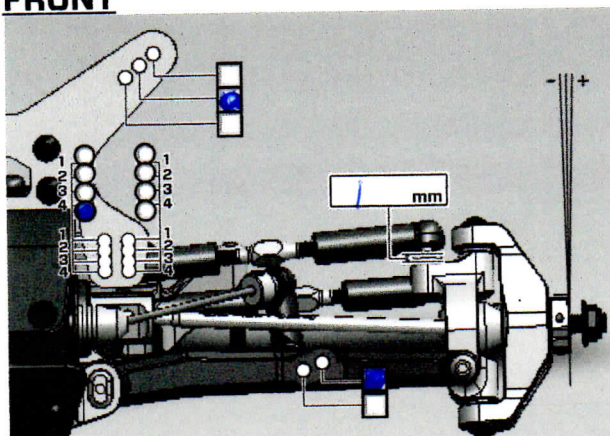

CAMBER

L .5
R .5

TOE ANGLE

2°

RIDE HEIGHT

22 mm

STEERING BALL STUD (INNER)

1 mm

FRONT TIRE

Sweep
HARDNESS Super Soft


FRONT DIFF.

5000 wt.

GEAR DIFF.

☐

OIL SHOCK

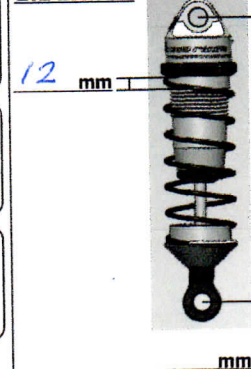

OIL

TLR 35 wt.

LIMITERS

— mm



PISTON

1.5 Yoke

SPRING

Green

REAR

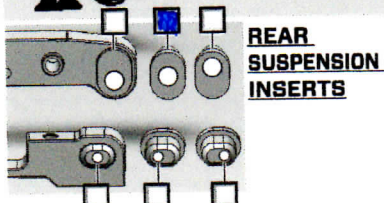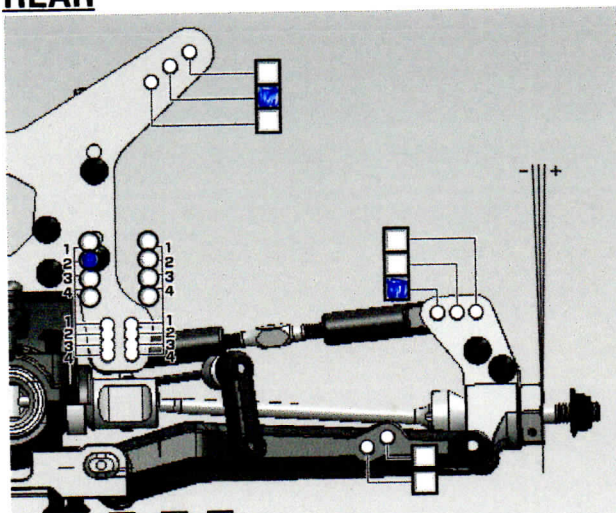

CAMBER

L .5
R .5

TOE ANGLE

3°

RIDE HEIGHT

22 mm

REAR TIRE

Sweep
HARDNESS Super Soft


REAR DIFF.

3000 wt.

GEAR DIFF.

☐

OIL SHOCK

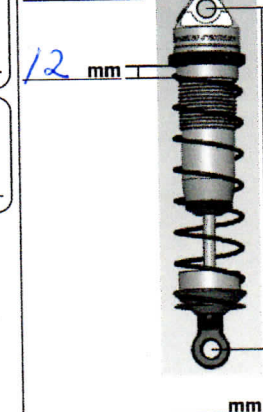

OIL

TLR 30 wt.

LIMITERS

2mm mm


PISTON

1.7 Yoke


SPRING

Green


MID DIFF. ☐



MID SLIPPER ☐



REAR SUSPENSION SPACER ☐

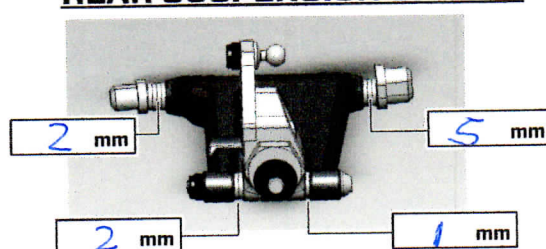

NOTES: