

Name of Driver		Date	Track		Engine	Plug	Muffler	
Renaud Savoya		06/03/22	MACCR Charmes		Picco P3TT	P5TH	EFRA 2166	
		Condition: Oiled		Temperature: 13°C				
Spur Gear	Clutch Bell	Clutch Spring		Clutch Shoe	Tire	Tire Insert	Wheel	Body
45 T	<input type="checkbox"/> Std. <input checked="" type="checkbox"/> LW 13 T	<input type="checkbox"/> 0.90 <input type="checkbox"/> 1.00 <input checked="" type="checkbox"/> 0.95 <input type="checkbox"/> 1.10	Carbon <input checked="" type="checkbox"/> Aluminum <input checked="" type="checkbox"/> 3	IFW136	Chainlinks Clay	AKA	AKA	TKI2
				Compounds:			Fuel	
							Hot Road GT	

● Diff. Gear Set-Up

	Front	Center	Rear
Diff. Gear	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD Diff. Size <input checked="" type="checkbox"/> Small <input type="checkbox"/> Large	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12
	# 20k	# 10k	# 5k

● Shock Set-Up

	Front	Rear
Shock Type	P : w/Diaphragm A : Aeration Size 50 - type P	Size 58 - type P
Shock Piston	B : Black W : White T : Taper T φ 8 x 1,2	T φ 8 x 1,4
Shock Oil	# 450	# 600
Shock Spring	Red 70mm	Red 81mm

● Ride Height

Front	Rear
23 mm	2 mm
	8

● Rebound

Front	Rear
107 mm	124 mm

● Camber Angle

Front	Rear
+ 2 °	+ 3 °


● Toe Angle

Front	Rear
+ 2 °	<input checked="" type="checkbox"/> 2.5° <input type="checkbox"/> 3° <input type="checkbox"/> 3.5°

● Wheelbase

Collar of Rear Hub	Front Side	Rear Side
	5 mm	0 mm


● Shock Mount Position



Sus. Arm

Front	In	Out
Rear	In	<input checked="" type="checkbox"/> Out

● Rear Upper Arm Position



● Rear Wheel Hub

Narrow	Std.	<input checked="" type="checkbox"/> Wide
--------	------	--

Shock Stay

Front	Short	<input checked="" type="checkbox"/> Long
Rear	Alu	<input checked="" type="checkbox"/> Carbon

Shock Bush

Front	<input checked="" type="checkbox"/> Short	<input type="checkbox"/> Std.
Rear	Short	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> Long

Plastic	<input checked="" type="checkbox"/> Aluminum
---------	--

Hub Carrier Bush	<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Brass
------------------	---	--------------------------------

<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Aluminum
---	-----------------------------------


● Front Sus. Arm

SS	<input checked="" type="checkbox"/> Soft (Std.)	<input type="checkbox"/> Hard
----	---	-------------------------------

● Front Sus. Bush

Rear Side	<input type="checkbox"/> Std.	<input checked="" type="checkbox"/> Hard
-----------	-------------------------------	--

● Front Upper Arm Position




● Front Wheel Hub

Narrow	<input checked="" type="checkbox"/> Std.	<input type="checkbox"/> Wide
--------	--	-------------------------------

● Front Hub Carrier

Plastic	<input checked="" type="checkbox"/> Aluminum
---------	--

13°	<input checked="" type="checkbox"/> 16°	<input type="checkbox"/> 17.5°	<input type="checkbox"/> 19°	<input type="checkbox"/> 22°
-----	---	--------------------------------	------------------------------	------------------------------

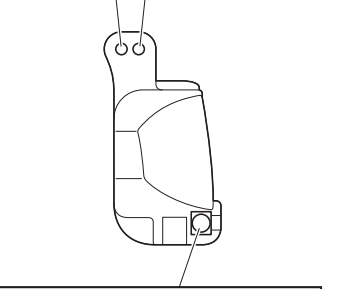

● Rear Sus. Bush

Lower Bush	<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Brass
------------	---	--------------------------------

-1°	<input checked="" type="checkbox"/> 0°	<input type="checkbox"/> +1°
-----	--	------------------------------

● Rear Sus. Arm

Soft (Std.)	<input checked="" type="checkbox"/> Hard
-------------	--

Short	<input type="checkbox"/> Medium	<input checked="" type="checkbox"/> Long
-------	---------------------------------	--

Short	<input type="checkbox"/> Medium	<input checked="" type="checkbox"/> Long
-------	---------------------------------	--

● Rear Sus. Arm

Soft (Std.)	<input checked="" type="checkbox"/> Hard
-------------	--

Short	<input type="checkbox"/> Medium	<input checked="" type="checkbox"/> Long
-------	---------------------------------	--

Short	<input type="checkbox"/> Medium	<input checked="" type="checkbox"/> Long
-------	---------------------------------	--


● Servo Horn

Steering	Throttle
----------	----------

Plastic	<input type="checkbox"/> Plastic
---------	----------------------------------

AL. Long	<input checked="" type="checkbox"/> AL. Short
----------	---

● Steering Plate



● Sway Bar



Front	Rear
-------	------

φ 2,4mm	φ 2,9mm
---------	---------

1 mm	2 mm
------	------

● Weight

Front	Rear
-------	------

None	<input type="checkbox"/> None
------	-------------------------------

IFW604-10	<input type="checkbox"/> IFW605-10
-----------	------------------------------------

<input checked="" type="checkbox"/> IFW604-20	<input checked="" type="checkbox"/> IFW605-20
---	---

other	<input type="checkbox"/> other
-------	--------------------------------

● Wing

IF491(TKI4)	Flap	<input checked="" type="checkbox"/> None
-------------	------	--

5mm	<input type="checkbox"/> 8mm
-----	------------------------------

<input checked="" type="checkbox"/> Holes	<input type="checkbox"/> Holes
---	--------------------------------

<input checked="" type="checkbox"/> IF491(TKI4)	<input type="checkbox"/> IF491(TKI4)
---	--------------------------------------

memo:

OPTIONS:

- titanium screws and turnbuckles
- IFW426 aluminium AMB Plate
- IFW436 16 degrees caster blocks
- IFW631 and IFW632 shock towers
- IFW626 carbon servo saver plate
- IF403B and IFW634-45S small center diff