

Driver		Date		Track		Event		Spur Gear		Pinion Gear	
				Setup conseillé Condition: 25°C		Ruée 6 Agde		<input type="checkbox"/> 46T (Std.) <input type="checkbox"/> 47T <input type="checkbox"/> 48T		20 T	
Motor		Battery		ESC		Tires		Tire Insert		Wheel	
						Jetko Sting Compound: SS				Stock	

### ● Diff. Gear Set-Up

	Front	Center	Rear
Diff. Gear	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> LSD <input type="checkbox"/> IFW621	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> LSD <input type="checkbox"/> IFW622	<input checked="" type="checkbox"/> Std. <input type="checkbox"/> LSD <input type="checkbox"/> IFW621
	Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12	# 7 000	# 7 000
			Ring Gear <input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12
	# 3 000		# 3 000

### ● Shock Set-Up

	Front	Rear
Shock Type	P: w/Diaphragm A: Aeration Size: 50 - P	Size: 58 - P
Shock Piston	B: Black W: White T: Taper T: 8x1,2	W: 8x1,3
Shock Oil	# 500	# 550
Shock Spring	Length: 72mm Color: black	Length: 86mm Color: black

### ● Ride Height


Front	Rear
23 mm	28 mm

### ● Rebound

Front	Rear
105 mm	123 mm


### ● Camber Angle

Front	Rear
+ -2°	+ -3°

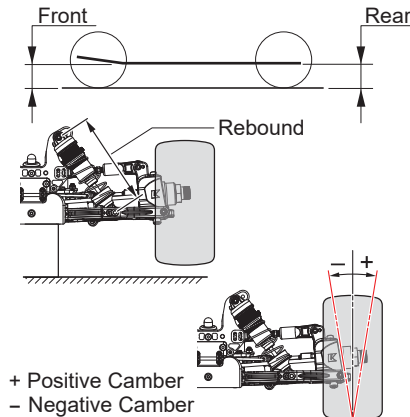

### ● Toe Angle


Front	Rear
+ -2°	<input type="checkbox"/> 2.5° <input checked="" type="checkbox"/> 3° <input type="checkbox"/> 3.5°



### ● Wheelbase


Collar of Rear Hub	Front Side: 5 mm	Rear Side: 0 mm
--------------------	------------------	-----------------

### ● Shock Mount Position



Shock Stay	
Front	<input type="checkbox"/> Std. <input checked="" type="checkbox"/> Long
Rear	<input type="checkbox"/> Std. <input checked="" type="checkbox"/> Long
Rear Upper Shock Bush	
	<input checked="" type="checkbox"/> Std. <input checked="" type="checkbox"/> Long
Sus. Arm	
Front	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out
Rear	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out

### ● Rear Upper Arm Position



<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Aluminum
Hub Carrier Bush	
<input checked="" type="checkbox"/> Plastic	<input type="checkbox"/> Brass

### ● Rear Wheel Hub

<input type="checkbox"/> Narrow	<input type="checkbox"/> Std.	<input checked="" type="checkbox"/> Wide
---------------------------------	-------------------------------	--


### ● Front Sus. Arm

<input checked="" type="checkbox"/> Soft (Std.)	<input type="checkbox"/> Hard
---	-------------------------------

### ● Front Sus. Bush

Rear Side	<input checked="" type="checkbox"/>
-----------	-------------------------------------

### ● Front Upper Arm Position




### ● Front Wheel Hub

<input type="checkbox"/> Narrow	<input checked="" type="checkbox"/> Std.	<input type="checkbox"/> Wide
---------------------------------	--	-------------------------------

### ● Front Hub Carrier

<input type="checkbox"/> Plastic	<input checked="" type="checkbox"/> Aluminum
<input type="checkbox"/> 13°	<input type="checkbox"/> 16° <input checked="" type="checkbox"/> 17.5° <input type="checkbox"/> 19°



### ● Front Wheel Hub

Lower Bush	<input type="checkbox"/> Plastic	<input type="checkbox"/> Brass	
	-1°	0°	+1° <input checked="" type="checkbox"/>

### ● Rear Sus. Bush

Front Side	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Rear Side	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>


### ● Rear Sus. Arm

<input checked="" type="checkbox"/> Soft (Std.)	<input type="checkbox"/> Hard
Rear Sus. Bush	
Short	<input type="checkbox"/>
Medium	<input type="checkbox"/>
Long	<input checked="" type="checkbox"/>


### ● Servo Horn

Steering	Throttle
<input type="checkbox"/> Plastic	<input type="checkbox"/> Plastic
<input type="checkbox"/> Alum. Long	<input type="checkbox"/> Aluminium
<input checked="" type="checkbox"/> Alum. Short	

### ● Steering Plate



### ● Sway Bar



Front	Rear
φ 2,4mm	φ 2,8mm
0 mm	2 mm

### ● Weight

Front	Rear
<input checked="" type="checkbox"/> None	<input type="checkbox"/> None
<input type="checkbox"/> IFW604-10	<input type="checkbox"/> IFW605-10
<input type="checkbox"/> IFW604-20	<input type="checkbox"/> IFW605-20
<input type="checkbox"/> other	<input type="checkbox"/> other

### ● Wing

<input checked="" type="checkbox"/> IF491(TK14)	Flap <input checked="" type="checkbox"/> None
	<input type="checkbox"/> 5mm
	<input type="checkbox"/> 8mm
	<input type="checkbox"/> Holes

Couronne module 0.8 59 dents et pignon 20 dents

# Notes