


Name Casper Date 3/07/08 Truck / City Pegasus Montclair, Ca Event _____

Front Suspension

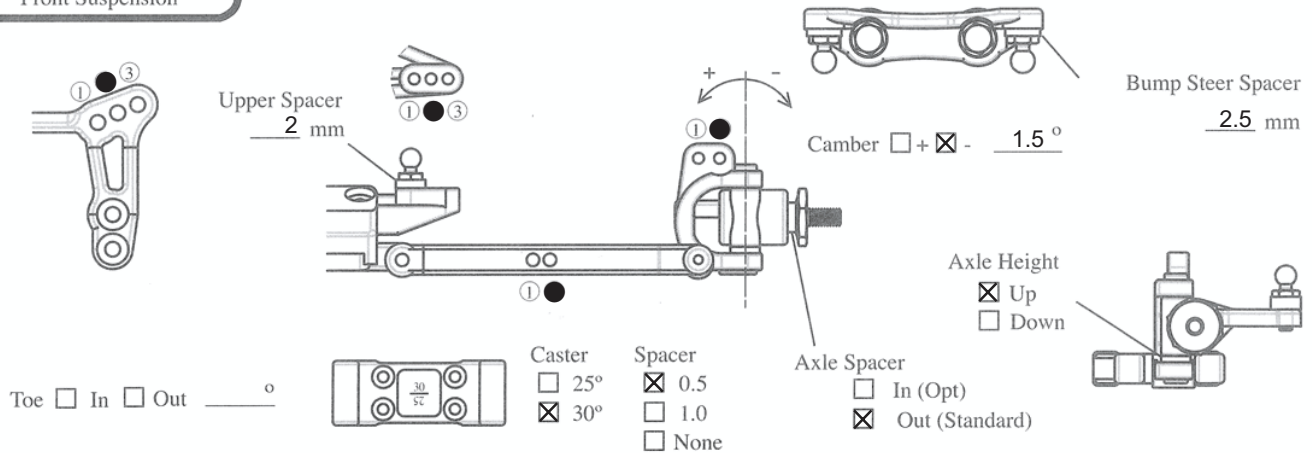

Upper Spacer 2 mm

Bump Steer Spacer 2.5 mm

Camber ☐ + ☒ - 1.5 °

Axle Height ☒ Up ☐ Down

Toe ☐ In ☐ Out _____ °


Caster ☐ 25° ☒ 30°

Spacer ☒ 0.5 ☐ 1.0 ☐ None

Axle Spacer ☐ In (Opt) ☒ Out (Standard)

Comment Front Suspension:

Rear Suspension

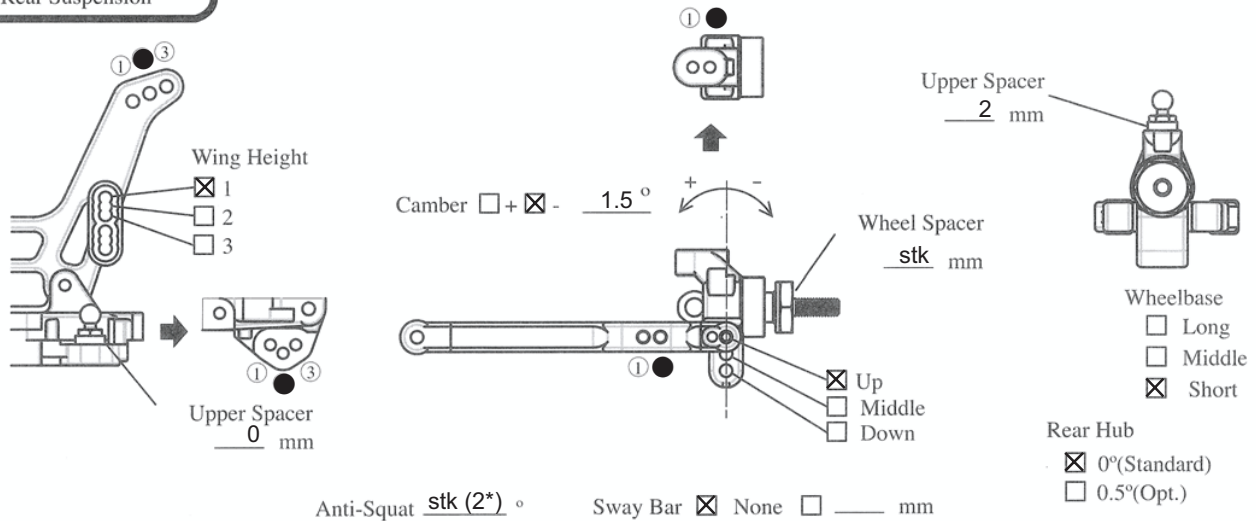

Wing Height ☒ 1 ☐ 2 ☐ 3

Upper Spacer 2 mm

Wheel Spacer stk mm

Wheelbase ☐ Long ☐ Middle ☒ Short

Rear Hub ☒ 0°(Standard) ☐ 0.5°(Opt.)

Upper Spacer 0 mm

Camber ☐ + ☒ - 1.5 °


Anti-Squat stk (2*) °

Sway Bar ☒ None ☐ _____ mm

Comment Rear Suspension:

Shock

	Front	Rear
Shock Piston	<u>3 - B</u>	<u>3 - A</u>
Shock Oil	<u># LOSI 35</u>	<u># LOSI 30</u>
Shock Spring	<u>ORG/YELL</u>	<u>YELLOW</u>
Limiters	<u>0</u>	<u>0</u>
Shock Length	_____ mm	_____ mm




Body / Wing / Chassis

Body Stk

Wing Stk

Wing Angle ☐ 4° ☒ 7° ☐ 10°

Battery Placement ☒ Front ☐ Rear

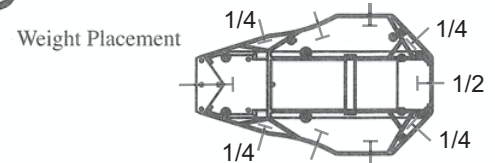

PL 

Ride Height ☐ A ☐ B ☐ F _____ mm ☐ R _____ mm

Tire

	Front	Rear
Tire	<u>M3 Pro-line wide</u>	<u>M3 Holeshoot</u>
Inserts	<u>Stk</u>	<u>Bomb 1</u>
Wheel	<u>Kyosho</u>	<u>Kyosho</u>
Traction Compound	<u>N/A</u>	

Others

Motor Banzai 19T

Pinion/Spur 19 / 78

Battery Slingshot Epower 4500

ESC Keyence

Truck Condition

☐ Smooth ☒ Wet ☐ Blue Groore

☒ Bumpy ☐ Dry ☐ Clay

☐ Low Truction ☐ Sandy ☐ Dusty

☒ Med. Truction ☐ Soft Dirt ☐ Other

☐ Higt Truction ☐ Grass

Comment : Rear ride just below bones level, Front ride hieght arms level. Mid rear arm conversion with 54mm shocks screwed all the way in. Rear shock in middle hole of mid rear arm.