

KYOSHO RB5 FT Setup sheet

Designed by Samuel Vande Castele

Name _____

Date _____

Truck / City _____

Event _____

Front Suspension



Upper Spacer _____ mm
Shock Stay
☐ Std (UM511)
☐ C-Comp (UMW500)
☐ FT

Toe ☐ In ☐ Out _____°

Front Bulkhead Weight Placement

☐ None


☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g * 1oz=28g



Camber ☐ + ☐ - _____°

4.8mm Ball Stud
☐ Standard (UM128)
☐ High Mount (+2mm: UMW508)



Caster ☐ 25° ☐ 30°
Spacer ☐ 0.5 ☐ 1.0 ☐ None




Ackerman Steer Spacer _____ mm

Axle Type
☐ Standard (Steel: UM506)
☐ Option (Aluminum: UMW507)

Bump Steer Spacer _____ mm

Axle Spacer
☐ Out (Standard) _____ mm
☐ In _____ mm


Axle Height Spacer
☐ Up
☐ Down



☐ Front ☐ Middle ☐ Back

Comments: _____

Rear Suspension

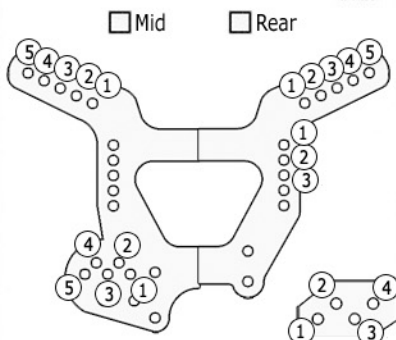

Upper Spacer _____ (mm)

Rear Wishbones Direction
☐ Kit ☐ Flipped

Lower Sus Holder

Normal ☐ RF: RB5 ☐ Aluminum (Opt) UMW511+UMW512
Wide ☐ RF2: RB5SP ☐ UMW514+

Sus Holder Spacer
F ☐ 0.5 ☐ 1.0 ☐ None
R ☐ 0.5 ☐ 1.0 ☐ None


Anti-Squat _____°

Swing Shaft

☐ 62.5mm: RB5 (UM510, UM510-01)
☐ 65.5mm: RB5SP (UM522, LA232-01)

Lower Arm
☐ Short: RB5 (UM503)
☐ Middle: RB5SP (UM521)

Upper Spacer _____ mm



Wheel base
☐ Long
☐ Middle
☐ Short

Camber ☐ + ☐ - _____°

Axle Spacer
☐ Out _____ mm
☐ In _____ mm

Sway Bar ☐ None ☐ _____ mm

Wheel Shaft Type

Wheel Spacer ☐ RB5SP (UM522-02)
☐ RB5 (UM510-02)
☐ for PL-Wheel (UMW502)
☐ Type-B (UM519)
☐ UMW516-0
☐ UMW516-1

Comments: _____

Shock

Front

Rear

Shock Piston _____

Shock Oil # _____

Shock Spring _____

Limiters

in out mm mm

Shock Length (A) _____ mm


Shock Length (B) _____ mm

Shock Top Type

Std: RB5 Low: ZX5FS Std: RB5 Low: ZX5FS

Rear Shock Shaft
☐ STD: RB5SP (W5193-01) 50mm
☐ Opt: ZX5 (W5183-02) 54mm

Comments: _____



Body / Wing / Chassis

Body: _____

Front Wing: _____

Rear Wing: _____

Wing Angle

4° ☐ 7° ☐ 10° ☐

Configuration

☐ Mid Motor
☐ Rear Motor

Battery Position

☐ Saddle
☐ Stick

5 4 3 2 1

Ride Height front: _____ Rear: _____

Tire

Front

Rear

Others

gear ratio = 2.6

Tire

Inserts

Wheel

Compound

Motor

Pinion/Spur _____ / _____

Battery

ESC

Comments: _____

Truck Condition

☐ Smooth

☐ Bumpy

☐ Low Truaction

☐ Med. Truaction

☐ High Truaction

☐ Wet

☐ Dry

☐ Sandy

☐ Soft Dirt

☐ Grass

☐ Blue Groore

☐ Clay

☐ Dusty

☐ Other

Springs

55 Orange
60 Orange Yellow
65 Yellow
68 Blue
70 Silver
72 Cobalt Blue
75 Light Green
80 Green

Springs - Big Bore

Front / Rear
Pink - XGS001 / XGS006
White - XGS002 / XGS007
Gold - XGS003 / XGS008
Red - XGS004 / XGS009
Yellow - XGS005 / XGS010