

# KYOSHO RB5 FT Setup sheet

Designed by Samuel Vande Castele

Name \_\_\_\_\_

Date \_\_\_\_\_

Truck / City \_\_\_\_\_

Event \_\_\_\_\_

## Front Suspension



- Shock Stay  
 Std (UM511)  
 C-Comp (UMW500)  
 FT

Toe  In  Out \_\_\_\_\_°

Front Bulkhead Weight Placement


- None  
 Bulkhead Inside \_\_\_\_\_ oz \_\_\_\_\_ g  
 On the skid plate \_\_\_\_\_ oz \_\_\_\_\_ g \* 1oz=28g



Upper Spacer \_\_\_\_\_ mm

Camber  +  - \_\_\_\_\_°

- 4.8mm Ball Stud  
 Standard (UM128)  
 High Mount (+2mm:UMW508)



- Caster Spacer  
 25°  0.5  
 30°  1.0  
 None



- Axle Type  
 Standard (Steel:UM506)  
 Option (Aluminum:UMW507)

Axle Spacer \_\_\_\_\_ mm

- Out (Standard)  
 In \_\_\_\_\_ mm

Axle Height Spacer

- Up  
 Down


Ackerman Steer Spacer \_\_\_\_\_ mm

Bump Steer Spacer \_\_\_\_\_ mm

- Front  Middle  Back

Comments: \_\_\_\_\_

## Rear Suspension

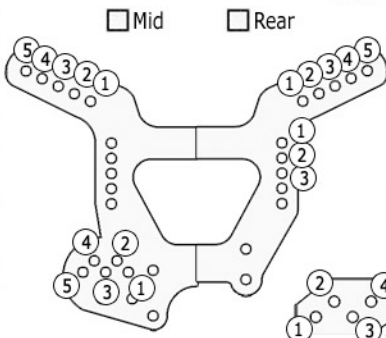

Mid  Rear

Upper Spacer \_\_\_\_\_ (mm)

Rear Wishbones Direction  
 Kit  Flipped

### Lower Sus Holder

- Normal Aluminum (Opt)  
 Narrow  RF:RB5  UMW511+UMW512  
 Wide  RF2:RB5SP  UMW514+

- Sus Holder Spacer  
 F  0.5  1.0  None  
 R  0.5  1.0  None


Anti-Squat \_\_\_\_\_°

Swing Shaft

- 62.5mm:RB5 (UM510, UM510-01)  
 65.5mm:RB5SP (UM522, LA232-01)

- Lower Arm  
 Short:RB5 (UM503)  
 Middle:RB5SP (UM521)

Upper Spacer \_\_\_\_\_ mm



Camber  +  - \_\_\_\_\_°

- Axle Spacer  
 Out \_\_\_\_\_ mm  
 In \_\_\_\_\_ mm

Wheel base

- Long  
 Middle  
 Short

Sway Bar  None  
 \_\_\_\_\_ mm

Wheel Shaft Type

- RB5SP (UM522-02)  
 RB5 (UM510-02)  
 for PL-Wheel (UMW502)

Wheel Spacer \_\_\_\_\_ mm

- Type-B (UM519)  
 UMW516-0  
 UMW516-1


Comments: \_\_\_\_\_

## Shock

Front

Rear

- Shock Piston \_\_\_\_\_  
 Shock Oil # \_\_\_\_\_ # \_\_\_\_\_  
 Shock Spring \_\_\_\_\_  
 Limiters in out mm mm in out mm mm  
 Shock Length (A) \_\_\_\_\_ mm \_\_\_\_\_ mm  
 Shaft Length (B) \_\_\_\_\_ mm \_\_\_\_\_ mm  
 Shock Top Type        
 Std:RB5 Low:ZX5FS Std:RB5 Low:ZX5FS  
 Rear Shock Shaft  STD:RB5SP (W5193-01) 50mm  
 Opt:ZX5 (W5183-02) 54mm



Comments: \_\_\_\_\_

## Body / Wing / Chassis

- Body: \_\_\_\_\_  
 Front Wing: \_\_\_\_\_  
 Rear Wing: \_\_\_\_\_  
 Wing Angle  
 4°  7°  10°

- Configuration  
 Mid Motor  
 Rear Motor

- Battery Position  
 Saddle  
 Stick

⑤ ④ ③ ② ①

Ride Height front: \_\_\_\_\_ Rear: \_\_\_\_\_

## Tire

Front

Rear

## Others

gear ratio = 2.6

- Tire \_\_\_\_\_  
 Inserts \_\_\_\_\_  
 Wheel \_\_\_\_\_  
 Compound \_\_\_\_\_  
 Motor \_\_\_\_\_  
 Pinion/Spur \_\_\_\_\_ / \_\_\_\_\_  
 Battery \_\_\_\_\_  
 ESC \_\_\_\_\_

Comments: \_\_\_\_\_

## Truck Condition

- Smooth  Sandy  
 Bumpy  Soft Dirt  
 Low Traction  Grass  
 Med. Traction  Blue Groove  
 High Traction  Clay  
 Wet  Dusty  
 Dry  Other

### Springs

- # 55 Orange  
 # 60 Orange Yellow  
 # 65 Yellow  
 # 68 Blue  
 # 70 Silver  
 # 72 Cobalt Blue  
 # 75 Light Green  
 # 80 Green

### Springs - Big Bore

- Front / Rear  
 Pink - XGS001 / XGS006  
 White - XGS002 / XGS007  
 Gold - XGS003 / XGS008  
 Red - XGS004 / XGS009  
 Yellow - XGS005 / XGS010