

Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Upper Spacer: _____ mm

Shock Tower: _____

Toe: ☐ In ☐ Out _____°

Toe Rod: _____

Front Bulkhead Weight Placement:

☐ None

☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g (*1oz = 28g)

4.8mm Ball Stud:

☐ UM128 (Std)

☐ UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

Caster:

☐ 25°

☐ 30°

Spacer:

☐ A (UM502)

☐ B (UMW721/Std)

☐ C (UM567)

Caster Block:

☐ 0.5

☐ 1.0

☐ None

0°

2°

4°

AI Steering Support:

☐ None

☐ UMW724

Axel Spacer:

☐ Out _____ mm

☐ In _____ mm

Wheel Hub:

☐ UM569/Std

☐ UM506

Caster Block Position:

☐ In (Wide/Std)

☐ Out (Narrow)

4.8mm Ball Stud:

☐ LA246 (-1mm Low Mount)

☐ 97050M (STD)

Ackermann Steer Spacer: _____ mm

☐ UMW701 Aluminum ST Plate

☐ UMW702 Aluminum Crank Arm

Bump Steer Spacer: _____ mm

Axel Height Spacer:

☐ _____ mm

☐ _____ mm

Wheelbase: F _____ mm R _____ mm

Comments: _____

Rear Suspension

Shock Position:

☐ Front ☐ Rear

Shock Tower: _____

Anti-Squat: _____°

4.8mm Ball Stud:

☐ UM129

☐ UMW508 (+2mm High Mount)

☐ 97050M

☐ UM128 (Std)

Upper Spacer: _____ mm

RR: _____

Mid: _____

Susp Holder Spacer:

F ☐ 0.5 ☐ 1.0 ☐ None

R ☐ 0.5 ☐ 1.0 ☐ None

Universal Swing Shaft:

☐ Type-B (UM519)

☐ Type-B2 (UM519-2)

Camber: _____°

Rear Hub Carrier:

☐ 0° Type-B (UM519)

☐ 0° Type-B2 (UM519-2)

☐ 0° Alu (UMW704-0)

☐ 0.5° Alu (UMW704-05)

☐ 1° Alu (UMW704-1)

Drive Hub:

☐ 4mm (TFW113)

☐ 4.5mm (LAW30GM/Std.)

☐ 5.2mm (UMW523)

Axle Spacer:

☐ Out _____ mm

☐ In _____ mm

Sway Bar: ☐ None ☐ _____ mm

Lower Susp Holder:

Plastic

☐ RF ☐ RF2L ☐ RF2

Option

☐ UMW511GM (RF/Alu)

(Opt/Adjustable)

☐ UMW705 (RF/Alu) _____ Block

☐ UMW725 (RF-MID/Bra) _____ Block

(Opt/Adjustable)

☐ UMW706 (RR-RWD) _____ Block

☐ UMW707 (RR-MID) _____ Block

Upper Spacer: _____ mm

Wheelbase: F _____ mm R _____ mm

Wheelbase: F _____ mm R _____ mm

Comments: _____

Shocks

Front Rear

Piston: _____

Oil: # _____ # _____

Spring: _____

Limiters: In _____ mm In _____ mm

Out _____ mm Out _____ mm


Length (A): _____ mm _____ mm

O-Ring: _____

Shock Top Type: ☐ Alu (UM719/Std) ☐ UM753-1


Ball End Type: Front ☐ S ☐ M ☐ L

Rear ☐ S ☐ M ☐ L




Am0 - V4.1

Battery placement



Chassis

☐ Stock ☐ UM731

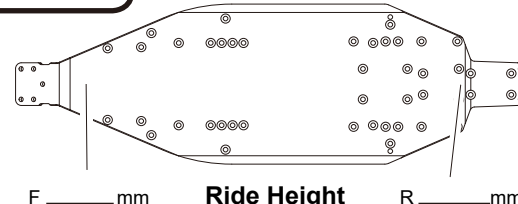

Transmission

☐ Rear Motor

☐ Mid-Ship 3 Gear

☐ Mid-Ship 4 Gear

☐ Mid-Ship Laydown

Battery Type

☐ Straight

☐ Separate

☐ Short

Type

Track Condition

☐ Smooth

☐ Bumpy

☐ Low Traction

☐ Med. Traction

☐ High Traction

☐ Wet

☐ Dry

☐ Sandy

☐ Soft Dirt

☐ Grass

☐ Blue Groove

☐ Clay

☐ Dusty

☐ _____

Wing

Wing Mount:

☐ Blast-S

☐ Blast-L

☐ Step-S

☐ Step-M

☐ Step-L

☐ Step 2.0

☐ Step 3.0

☐ Straight

☐ Round

Wing Angle:

☐ Narrow

☐ Wide

☐ 4°

☐ 7°

☐ 10°

Lip: _____

Tire

Front Rear

Tire _____

Insert _____

Wheel _____

Other

Motor: _____

ESC: _____

Ratio: _____