


Name _____ Date _____ Truck / City _____ Event _____

Front Suspension




Upper Spacer: _____ mm

4.8mm Ball Stud: Camber: _____ °

☐ UM128 (Std)

☐ UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm



Axle Spacer: _____ mm

☐ Out _____ mm

☐ In _____ mm

4.8mm Ball Stud: ☐ LA246 (-1mm Low Mount)

☐ UM129 (Std)

Ackerman Steer Spacer: _____ mm

Toe: ☐ In ☐ Out _____ °

Front Bulkhead Weight Placement:

☐ None

☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g * 1oz=28g

Caster: ☐ 25° ☐ 30°

☐ A (UM502)

☐ B (UM721/Std.)

☐ C (UM567)

Spacer: ☐ 0.5 ☐ 1.0 ☐ None


Caster Block: ☐ 0° ☐ 2° ☐ 4°

Block position: ☐ IN ☐ OUT

Wheel Hub: _____ mm

Bump Steer Spacer: _____ mm


Axle Height Spacer: ☐ _____ mm ☐ _____ mm





Wheelbase: F: _____ mm R: _____ mm

Comments: _____

Rear Suspension



RR: 

Mid: 

Sus Holder Spacer: F ☐ 0.5 ☐ 1.0 ☐ None R ☐ 0.5 ☐ 1.0 ☐ None


Anti-Squat: _____ °

Sway Bar: ☐ None ☐ _____ mm

4.8mm Ball Stud: ☐ UM129 (Std) ☐ UMW508 (+2mm High Mount) ☐ 97050M

Upper Spacer: _____ mm

Lower Sus Holder: Normal ☐ RF ☐ Aluminum(Opt) ☐ UMW511+UMW512 ☐ UMW514+UMW515



Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Hub add Toe: ☐ 0°Type-B (UM519) ☐ 0°Type-B2 (UM519-2) ☐ 0°Alu (UMW516-0) ☐ 0.5°Alu (UMW516-05) ☐ 1°Alu (UMW516-1)

Axle Spacer: ☐ Out _____ mm ☐ In _____ mm

Comments: _____

Motor Position

☐ Rear Motor

☐ Midship Motor


Diff.

☐ Gear Diff. # _____

☐ Ball Diff.


Shock

	Front		Rear	
Shock Piston:	_____		_____	
Shock Oil:	# _____		# _____	
Shock Spring:	_____		_____	
Limiters:	in _____ mm	out _____ mm	in _____ mm	out _____ mm
Shock Length(A):	_____ mm		_____ mm	
Shock Length(B):	_____ mm		_____ mm	
Shock Length(C):	_____ mm		_____ mm	
Ball End type:	Front: ☐ S ☐ M ☐ L		Rear: ☐ S ☐ M ☐ L	



Chassis

Screw: _____

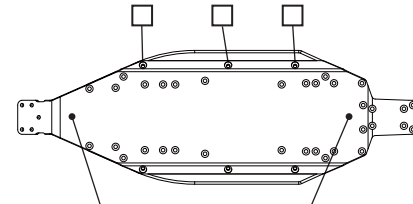

Ride Height: F _____ mm R _____ mm

Battery Position

Battery Type:

☐ Straight

☐ Separate

☐ Short

Battery Placement:

☐ Front

☐ Rear

Truck Condition

☐ Smooth ☐ Sandy

☐ Bumpy ☐ Soft Dirt

☐ Low Truction ☐ Grass

☐ Med. Truction ☐ Blue Groove

☐ Higt Truction ☐ Clay

☐ Wet ☐ Dusty

☐ Dry ☐ Other

Wing

☐ Blast-S Wing Mount: ☐ Narrow

☐ Blast-L ☐ Wide

☐ Step-S

☐ Step-M Wing Angle: ☐ 4°

☐ Step-L ☐ 7°

☐ Step 2.0 ☐ 10°

Lip: _____

Tire

	Front	Rear
Tire:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____
Traction Compound:	_____	_____

Electronics

Motor: _____

Pinion/Spur: _____

Battery: _____

ESC: _____

Comment
