


Name _____ Date _____ Truck / City _____ Event _____

Front Suspension




Upper Spacer: _____ mm

4.8mm Ball Stud: Camber: _____ °

☐ UM128 (Std) ☐ UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm



Axle Spacer: _____ mm

☐ Out _____ mm ☐ In _____ mm

4.8mm Ball Stud: ☐ LA246 (-1mm Low Mount) ☐ UM129 (Std)

Ackerman Steer Spacer: _____ mm

Toe: ☐ In ☐ Out _____ °

Front Bulkhead Weight Placement:

☐ None _____ oz _____ g

☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g * 1oz=28g

Caster: ☐ 25° ☐ 30°

☐ A (UM502) ☐ B (UM721/Std.) ☐ C (UM567)


Spacer: ☐ 0.5 ☐ 1.0 ☐ None

Caster Block: ☐ 0° ☐ 2° ☐ 4°

Block position: ☐ IN ☐ OUT

Wheel Hub: _____ mm

Axle Height Spacer: ☐ _____ mm ☐ _____ mm




Bump Steer Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Comments: _____

Rear Suspension



RR: _____

Mid: _____

Sus Holder Spacer: F ☐ 0.5 ☐ 1.0 ☐ None R ☐ 0.5 ☐ 1.0 ☐ None


Anti-Squat: _____ °

Sway Bar: ☐ None ☐ _____ mm

4.8mm Ball Stud: ☐ UM129 (Std) ☐ UMW508 (+2mm High Mount) ☐ 97050M


Upper Spacer: _____ mm

Lower Sus Holder: Normal ☐ RF ☐ Aluminum(Opt) ☐ UMW511+UMW512 ☐ UMW514+UMW515



Upper Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm



Wheelbase: F: _____ mm R: _____ mm

Rear Hub add Toe: ☐ 0°Type-B (UM519) ☐ 0°Type-B2 (UM519-2) ☐ 0°Alu (UMW516-0) ☐ 0.5°Alu (UMW516-05) ☐ 1°Alu (UMW516-1)

Camber: _____ °

Axle Spacer: ☐ Out _____ mm ☐ In _____ mm

Motor Position

☐ Rear Motor ☐ Midship Motor


Diff.

☐ Gear Diff. # _____ ☐ Ball Diff.

Comments: _____


Shock

	Front		Rear	
Shock Piston:	_____		_____	
Shock Oil:	# _____		# _____	
Shock Spring:	_____		_____	
Limiters:	in _____ mm	out _____ mm	in _____ mm	out _____ mm
Shock Length(A):	_____ mm		_____ mm	
Shock Length(B):	_____ mm		_____ mm	
Shock Length(C):	_____ mm		_____ mm	
Ball End type:	Front: ☐ S ☐ M ☐ L		Rear: ☐ S ☐ M ☐ L	



Chassis

Screw: _____

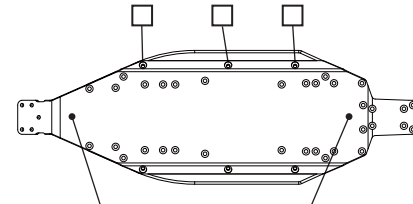

Ride Height: F _____ mm R _____ mm

Battery Position

Battery Type:

☐ Straight ☐ Separate ☐ Short

Battery Placement:

☐ Front ☐ Rear

Truck Condition

☐ Smooth	☐ Sandy
☐ Bumpy	☐ Soft Dirt
☐ Low Truction	☐ Grass
☐ Med. Truction	☐ Blue Groove
☐ Higt Truction	☐ Clay
☐ Wet	☐ Dusty
☐ Dry	☐ Other

Wing

Wing Mount: ☐ Blast-S ☐ Blast-L ☐ Step-S ☐ Step-M ☐ Step-L ☐ Step 2.0

Wing Angle: ☐ 4° ☐ 7° ☐ 10°

Lip: _____

Tire

	Front	Rear
Tire:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____
Traction Compound:	_____	_____

Electronics

Motor: _____

Pinion/Spur: _____

Battery: _____

ESC: _____

Comment
