

Name \_\_\_\_\_ Date \_\_\_\_\_ Track / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension

**Upper Spacer:** \_\_\_\_\_ mm

**Shock Tower:** \_\_\_\_\_

**Toe:**  In  Out \_\_\_\_\_ °

**Toe Rod:** \_\_\_\_\_

**Front Bulkhead Weight Placement:**

None

Bulkhead Inside \_\_\_\_\_ oz \_\_\_\_\_ g

On the skid plate \_\_\_\_\_ oz \_\_\_\_\_ g (\*1oz = 28g)

**4.8mm Ball Stud:**

UM128 (Std)

UMW508 (+2mm High Mount)

**4.8mm Ball Stud Spacer:** \_\_\_\_\_ mm

**Camber:** \_\_\_\_\_ °

**AI Steering Support:**

None

UMW724

**Axel Spacer:**

Out \_\_\_\_\_ mm

In \_\_\_\_\_ mm

**Wheel Hub:**

UM569/Std

UM506

**Caster Block Position:**

In (Wide/Std)

Out (Narrow)

**Caster:**

25°

30°

**Caster Block:**

0.5  0°

1.0  2°

None  4°

**Spacer:**

A (UM502)  B (UMW722/Bra)

B (UMW721/Std)  B (UMW723/Alu)

**4.8mm Ball Stud:**

LA246 (-1mm Low Mount)

97050M (STD)

**Ackermann Steer Spacer:** \_\_\_\_\_ mm

UMW701 Aluminum ST Plate

UMW702 Aluminum Crank Arm

**Bump Steer Spacer:** \_\_\_\_\_ mm

**Axel Height Spacer:**

\_\_\_\_\_ mm

\_\_\_\_\_ mm

**Knuckle:**

UM763 (Std)

UM714

**Wheelbase:**

F \_\_\_\_\_ mm R \_\_\_\_\_ mm

**Comments:** \_\_\_\_\_

### Rear Suspension

**Shock Tower:** \_\_\_\_\_

**Anti-Squat:** \_\_\_\_\_ °

**4.8mm Ball Stud:**

UM129

UMW508 (+2mm High Mount)

97050M

UM128 (Std)

**Upper Spacer:** \_\_\_\_\_ mm

**RR:** \_\_\_\_\_

**Mid:** \_\_\_\_\_

**Susp Holder Spacer:**

F  0.5  1.0  None

R  0.5  1.0  None

**Universal Swing Shaft:**

Type-B (UM519)

Type-B2 (UM519-2)

**Camber:** \_\_\_\_\_ °

**Rear Hub Carrier:**

0° Type-B (UM519)

0° Type-B2 (UM519-2)

0° Alu (UMW704-0)

0.5° Alu (UMW704-05)

1° Alu (UMW704-1)

**Drive Hub:**

4mm (TFW113)

4.5mm (LAW30GM/Std.)

5.2mm (UMW523)

**Axle Spacer:**

Out \_\_\_\_\_ mm

In \_\_\_\_\_ mm

**Wheelbase:**

F \_\_\_\_\_ mm R \_\_\_\_\_ mm

**Wheelbase:**

F \_\_\_\_\_ mm R \_\_\_\_\_ mm

**Comments:** \_\_\_\_\_

**Lower Susp Holder:**

Plastic  RF  RF2L  RF2

Option  UMW511GM (RF/Alu)

(Opt/Adjustable)

UMW705 (RF/Alu) \_\_\_\_\_ Block

UMW725 (RF-MID/Bra) \_\_\_\_\_ Block

(Opt/Adjustable)

UMW706 (RR-RWD) \_\_\_\_\_ Block

UMW707 (RR-MID) \_\_\_\_\_ Block

**Sway Bar:**  None  \_\_\_\_\_ mm

**Differential:**

Gear: \_\_\_\_\_

Ball: \_\_\_\_\_

### Shocks

Front Rear

Piston: \_\_\_\_\_

Oil: # \_\_\_\_\_ # \_\_\_\_\_

Spring: \_\_\_\_\_

Limiters: In \_\_\_\_\_ mm In \_\_\_\_\_ mm

Out \_\_\_\_\_ mm Out \_\_\_\_\_ mm


Length (A): \_\_\_\_\_ mm \_\_\_\_\_ mm

O-Ring: \_\_\_\_\_

Shock Top Type:  Alu (UM719/Std)  UM753-1


Ball End Type: Front  S  M  L

Rear  S  M  L




Am0 - V1

### Battery placement



### Chassis

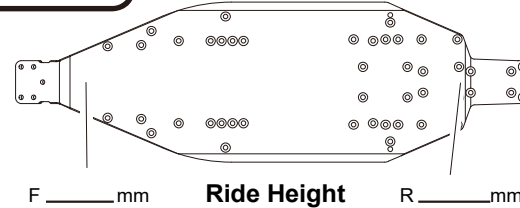

### Transmission

- Rear Motor
- Mid-Ship 3 Gear
- Mid-Ship 4 Gear
- Mid-Ship Laydown

### Battery Type


- Straight
- Separate
- Short
- Type \_\_\_\_\_

### Track Condition

- Smooth  Sandy
- Bumpy  Soft Dirt
- Low Traction  Grass
- Med. Traction  Blue Groove
- High Traction  Clay
- Wet  Dusty
- Dry \_\_\_\_\_

### Wing

- UM767 (Std)
- Step 2.0 - Straight
- Step 3.0 - Round
- Other \_\_\_\_\_



Lip: \_\_\_\_\_ mm

### Tire

Front Rear

Tire \_\_\_\_\_

Insert \_\_\_\_\_

Wheel \_\_\_\_\_

### Other

Motor: \_\_\_\_\_

ESC: \_\_\_\_\_

Ratio: \_\_\_\_\_

# NOTES