


Name \_\_\_\_\_ Date \_\_\_\_\_ Track / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension

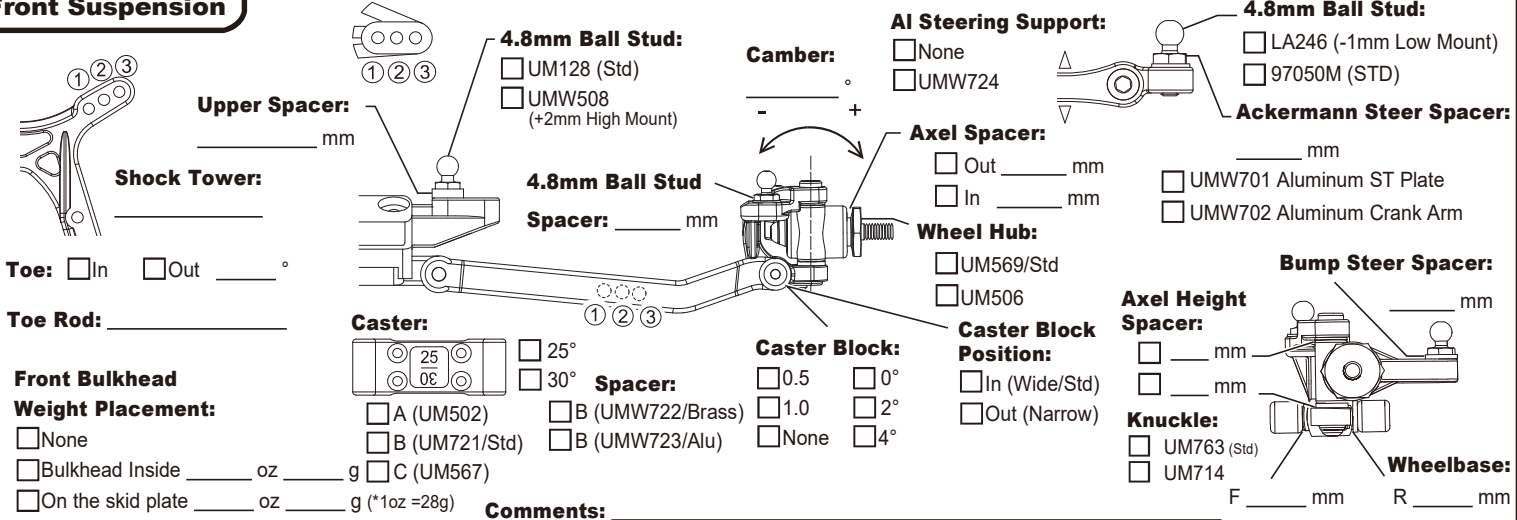

**Upper Spacer:** \_\_\_\_\_ mm

**Shock Tower:** \_\_\_\_\_

**Toe:**  In  Out \_\_\_\_\_ °

**Toe Rod:** \_\_\_\_\_

**Front Bulkhead Weight Placement:**

None

Bulkhead Inside \_\_\_\_\_ oz \_\_\_\_\_ g

On the skid plate \_\_\_\_\_ oz \_\_\_\_\_ g (\*1oz = 28g)

**4.8mm Ball Stud:**

UM128 (Std)

UMW508 (+2mm High Mount)

**4.8mm Ball Stud Spacer:** \_\_\_\_\_ mm

**Caster:**

25°

30°

**Caster Block:**

0.5  0°

1.0  2°

None  4°

**AI Steering Support:**

None

UMW724

**4.8mm Ball Stud:**

LA246 (-1mm Low Mount)

97050M (STD)

**Ackermann Steer Spacer:** \_\_\_\_\_ mm

UMW701 Aluminum ST Plate

UMW702 Aluminum Crank Arm

**Axel Spacer:**

Out \_\_\_\_\_ mm

In \_\_\_\_\_ mm

**Wheel Hub:**

UM569/Std

UM506

**Caster Block Position:**

In (Wide/Std)

Out (Narrow)

**Bump Steer Spacer:** \_\_\_\_\_ mm

**Axel Height Spacer:**

\_\_\_\_\_ mm

\_\_\_\_\_ mm

**Knuckle:**

UM763 (Std)


UM714

**Wheelbase:**

F \_\_\_\_\_ mm R \_\_\_\_\_ mm

**Comments:** \_\_\_\_\_

### Rear Suspension

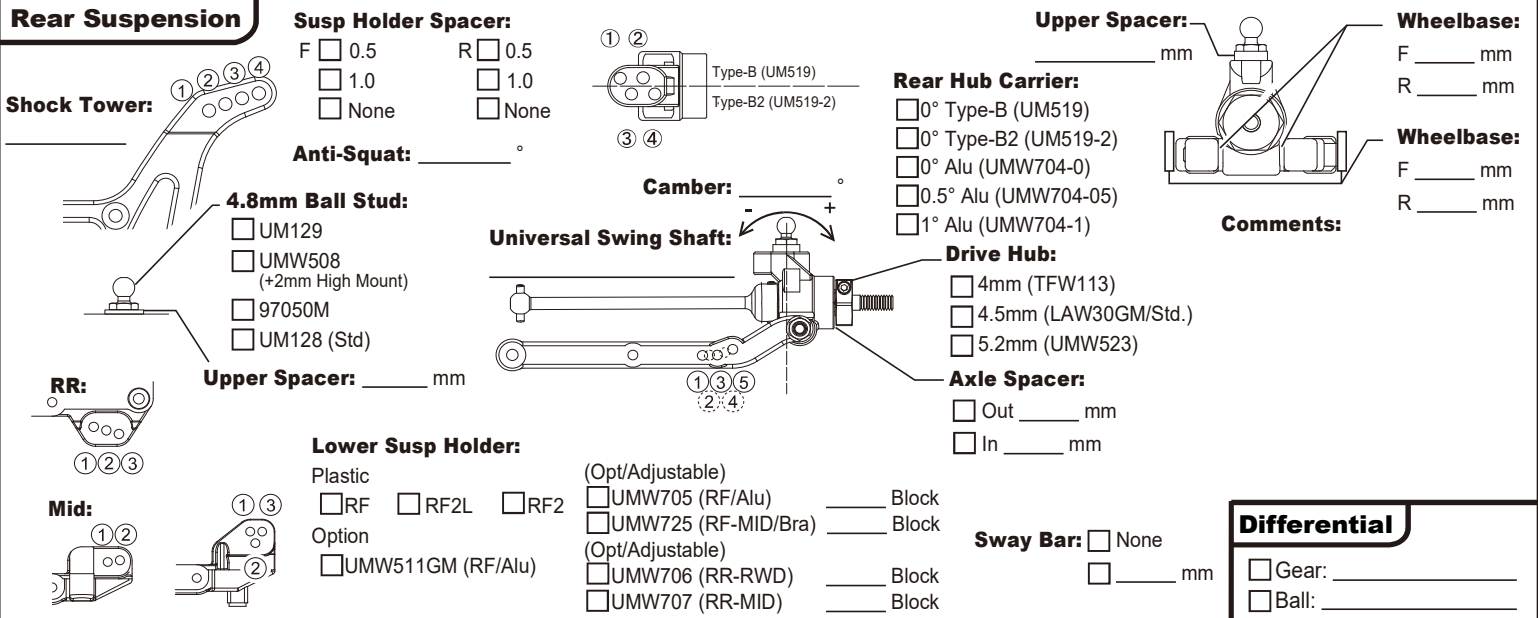

**Shock Tower:** \_\_\_\_\_

**Anti-Squat:** \_\_\_\_\_ °

**4.8mm Ball Stud:**

UM129

UMW508 (+2mm High Mount)

97050M

UM128 (Std)

**Upper Spacer:** \_\_\_\_\_ mm

**RR:** \_\_\_\_\_

**Mid:** \_\_\_\_\_

**Susp Holder Spacer:**

F  0.5  1.0  None

R  0.5  1.0  None

**Universal Swing Shaft:**

Type-B (UM519)

Type-B2 (UM519-2)

**Camber:** \_\_\_\_\_ °

**Rear Hub Carrier:**

0° Type-B (UM519)

0° Type-B2 (UM519-2)

0° Alu (UMW704-0)

0.5° Alu (UMW704-05)

1° Alu (UMW704-1)

**Drive Hub:**

4mm (TFW113)

4.5mm (LAW30GM/Std.)

5.2mm (UMW523)

**Axle Spacer:**

Out \_\_\_\_\_ mm

In \_\_\_\_\_ mm

**Wheelbase:**

F \_\_\_\_\_ mm R \_\_\_\_\_ mm

**Wheelbase:**

F \_\_\_\_\_ mm R \_\_\_\_\_ mm

**Comments:** \_\_\_\_\_

**Lower Susp Holder:**

Plastic

RF  RF2L  RF2

Option

UMW511GM (RF/Alu)

(Opt/Adjustable)

UMW705 (RF/Alu) \_\_\_\_\_ Block

UMW725 (RF-MID/Bra) \_\_\_\_\_ Block

(Opt/Adjustable)

UMW706 (RR-RWD) \_\_\_\_\_ Block

UMW707 (RR-MID) \_\_\_\_\_ Block

**Sway Bar:**  None  \_\_\_\_\_ mm


**Differential:**

Gear: \_\_\_\_\_

Ball: \_\_\_\_\_


### Shocks

	Front	Rear
Piston:	_____	_____
Oil:	# _____	# _____
Spring:	_____	_____
Limiters:	In _____ mm	In _____ mm
	Out _____ mm	Out _____ mm
Length (A):	_____ mm	_____ mm
O-Ring:	_____	_____
Shock Top Type:	<input type="checkbox"/> Alu (UM719/Std)	<input type="checkbox"/> UM753-1
Ball End Type:	Front <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L	Rear <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L

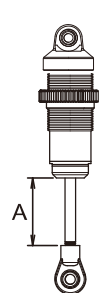


Am0 - V1

### Battery placement

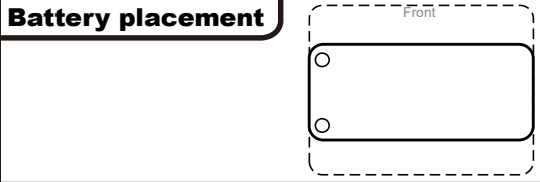

### Chassis

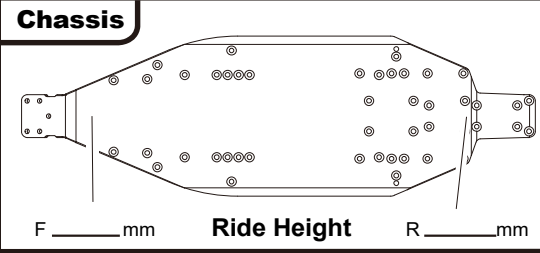

### Transmission

Rear Motor

Mid-Ship 3 Gear

Mid-Ship 4 Gear

Mid-Ship Laydown

### Battery Type

Straight

Separate

Short

Type \_\_\_\_\_

### Track Condition

<input type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Traction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Traction	<input type="checkbox"/> Blue Groove
<input type="checkbox"/> High Traction	<input type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input type="checkbox"/> _____

### Wing

UM767 (Std)


Step 2.0 - Straight

Step 3.0 - Round

Other \_\_\_\_\_

\_\_\_\_\_ mm

**Lip:** \_\_\_\_\_ mm



### Tire

	Front	Rear
Tire	_____	_____
Insert	_____	_____
Wheel	_____	_____

### Other

Motor: \_\_\_\_\_

ESC: \_\_\_\_\_

Ratio: \_\_\_\_\_

# NOTES