

Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Upper Spacer: _____ mm

Shock Tower: _____

Toe: ☐ In ☐ Out _____°

Toe Rod: _____

Front Bulkhead Weight Placement:

☐ None

☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g (*1oz = 28g)

4.8mm Ball Stud:

☐ UM128 (Std)

☐ UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

Caster:

☐ 25° ☐ 30°

Caster Block:

☐ 0.5 ☐ 0°

☐ 1.0 ☐ 2°

☐ None ☐ 4°

Spacer: _____

Comments: _____

AI Steering Support:

☐ None

☐ UMW724

Axel Spacer:

☐ Out _____ mm

☐ In _____ mm

Wheel Hub:

☐ UM569/Std

☐ UM506

Caster Block Position:

☐ In (Wide/Std)

☐ Out (Narrow)

Knuckle:

☐ UM763 (Std)

☐ UM714

Wheelbase:

F _____ mm R _____ mm

4.8mm Ball Stud:

☐ LA246 (-1mm Low Mount)

☐ 97050M (STD)

Ackermann Steer Spacer:

_____ mm

☐ UMW701 Aluminum ST Plate

☐ UMW702 Aluminum Crank Arm

Bump Steer Spacer:

_____ mm

Axel Height Spacer:

☐ _____ mm

☐ _____ mm

Rear Suspension

Shock Tower: _____

RR: _____

Mid: _____

Susp Holder Spacer:

F ☐ 0.5 ☐ 1.0 ☐ None

R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: _____°

4.8mm Ball Stud:

☐ UM129

☐ UMW508 (+2mm High Mount)

☐ 97050M

☐ UM128 (Std)

Upper Spacer: _____ mm

Lower Susp Holder:

Plastic ☐ RF ☐ RF2L ☐ RF2

Option ☐ UMW511GM (RF/Alu)

(Opt/Adjustable)

☐ UMW705 (RF/Alu) _____ Block

☐ UMW725 (RF-MID/Bra) _____ Block

(Opt/Adjustable)

☐ UMW706 (RR-RWD) _____ Block

☐ UMW707 (RR-MID) _____ Block

Universal Swing Shaft: _____

Camber: _____°

Comments: _____

Rear Hub Carrier:

☐ 0° Type-B (UM519)

☐ 0° Type-B2 (UM519-2)

☐ 0° Alu (UMW704-0)

☐ 0.5° Alu (UMW704-05)

☐ 1° Alu (UMW704-1)

Drive Hub:

☐ 4mm (TFW113)

☐ 4.5mm (LAW30GM/Std.)

☐ 5.2mm (UMW523)

Axle Spacer:

☐ Out _____ mm

☐ In _____ mm

Sway Bar: ☐ None ☐ _____ mm

Upper Spacer: _____ mm

Wheelbase:

F _____ mm

R _____ mm

Wheelbase:

F _____ mm

R _____ mm

Shocks

Front Rear

Piston: _____

Oil: # _____ # _____

Spring: _____

Limiters: In _____ mm In _____ mm

Out _____ mm Out _____ mm


Length (A): _____ mm _____ mm

O-Ring: _____

Shock Top Type: ☐ Alu (UM719/Std) ☐ UM753-1


Ball End Type: Front ☐ S ☐ M ☐ L

Rear ☐ S ☐ M ☐ L




Am0 - V1

Battery placement



Chassis

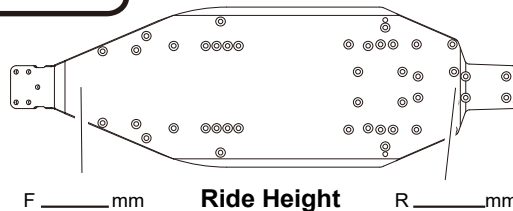

Tire

Front Rear

Tire _____

Insert _____

Wheel _____

Other

Motor: _____

ESC: _____

Ratio: _____

Differential

☐ Gear: _____

☐ Ball: _____

Transmission

☐ Rear Motor

☐ Mid-Ship 3 Gear

☐ Mid-Ship 4 Gear

☐ Mid-Ship Laydown

Battery Type

☐ Straight

☐ Separate

☐ Short

Type _____

Track Condition

☐ Smooth ☐ Sandy

☐ Bumpy ☐ Soft Dirt

☐ Low Traction ☐ Grass

☐ Med. Traction ☐ Blue Groove

☐ High Traction ☐ Clay

☐ Wet ☐ Dusty

☐ Dry ☐ _____


Wing

☐ UM767 (Std)

☐ Step 2.0 - Straight

☐ Step 3.0 - Round

☐ Other _____



Lip: _____ mm

NOTES