


ULTIMA RZ6 SET UP SHEET

KYOSHO
THE FINEST RADIO CONTROL MODELS

Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Toe: ☐ In ☐ Out _____°

Tie Rod: _____

Front Bulkhead


Weight Placement:

- ☐ None
☐ Bulkhead Inside _____ g
☐ On the skid plate _____ g


4.8mm Ball Stud:

- ☐ UM128(Std.)
☐ UMW508(+2mm High Mount)

Upper Spacer:



4.8mm Ball Stud Spacer:



Caster:

- ☐ 25°
☐ 30°
☐ A (UM502)
☐ B (UM721/Std)
☐ B (UMW722/Brass)
☐ B (UMW723/Alu)
☐ C (UM567)

Spacer:

- ☐ 0.5
☐ 1.0
☒ None

Caster Block:

- ☐ 0°
☐ 2°
☐ 4°

AL. Steering Support:

- ☐ None
☐ UMW724

Axle Spacer:

- ☐ Out _____ mm
☐ In _____ mm

Wheel Hub:

- ☐ UM569 / Std
☐ UM506

Caster Block Position:

- ☐ IN (wide/Std)
☐ OUT (Narrow)

4.8mm Ball Stud:

- ☐ LA246 (-1mm Low Mount)
☐ 97050M (Std)

Ackerman Steer Spacer:

_____ mm


Ackerman arrow direction:

- ☐ Front(std) ☐ Rear

Option:

- ☐ UMW701 Alu ST Plate
☐ UMW702 Alu Clank Arm

Bump Steer Spacer:



Axle Height Spacer:

_____ mm
 _____ mm

Wheelbase: F: _____ mm R: _____ mm

Comments: _____

Rear Suspension:

Shock Position:




Wing Stay Position:

Shock Stay Type:

- ☐ LA352(std)
☐ LAW59
 (Carbom/2mmLow)

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129

Upper Spacer:

_____ mm

Camber:

_____°


Sus.Arm:

- ☐ LA272(std)
☐ UM713B

Upper Spacer:

_____ mm

Hub Carrier:



- ☐ 0°Type-B(UM519)
☐ 0°Type-B2(UM519-2)
☐ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)

Front: _____ mm Rear: _____ mm

Wheelbase:

_____ mm _____ mm _____ mm _____ mm


Lower Sus Holder Block:

Front _____ mm Rear _____ mm

Lower Sus Holder Spacer:


Front _____ mm Rear _____ mm

Comments:



Sway Bar:

- ☐ None
☐ _____ mm



Rear Diff:

- ☐ Gear Diff. (Oil:# _____)
 (Oil weight: _____ g)
☐ Ball Diff.

Shock:

Front

Rear

Shock Piston:

Shock Oil: # _____ # _____

Shock Spring:


Limiters: in _____ mm out _____ mm in _____ mm out _____ mm

Shock Length(A): _____ mm _____ mm

Shock Too Type: ☐ Alu(UM719/Std) ☐ UM753-1


5.8mm Ball End:

Front: ☐ S ☐ M ☐ L
 Rear: ☐ S ☐ M ☐ L



Chassis:

Ride Height:

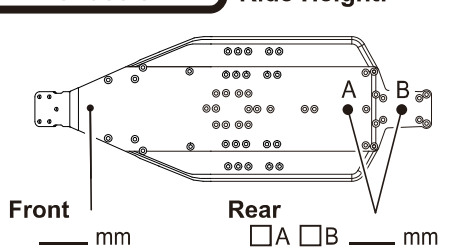

Front _____ mm

Rear ☐ A ☐ B _____ mm

Tire:

Front

Rear

Tire: _____

Inserts: _____

Wheel: _____

Traction Compound: _____

Electronics:

Battery:

- ☐ Saddle Pack ☐ Short

Battery Position:

- ☐ Std ☐ 8mm Front

Motor Position:


- ☐ Front ☐ Rear

Motor Mount Position:

- ☐ Std ☐ 8mm Front



前
Front



Motor:

Pinion/Spur: _____ / _____

Body / Wing:

Body:

Wing Mount:

- ☐ Narrow ☐ Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- ☐ 4° ☐ 7° ☐ 10°

Lip Height:

_____ mm

Material:

Screw: ☐ Steel ☐ Titanium

Pinion Gear: ☐ Steel ☐ Aluminium

Shock O-Ring: ☐ O-ring ☐ X-ring ☐ Red ☐ Clear

- ☐ Smooth ☐ Sandy
☐ Bumpy ☐ Soft Dirt
☐ Low Traction ☐ Grass
☐ Med. Traction ☐ Blue Groove
☐ Higt Traction ☐ Clay
☐ Wet ☐ Dusty
☐ Dry ☐ Astro turf
☐ EOS carpet