

Name _____

Date _____

Track / City _____

Event _____

Front Suspension



Upper Spacer: _____ mm

Front Tower:
 Std
 JT Tower


Toe: In Out _____°
 Tie Rod: _____

Front Bulkhead

Weight Placement: * 1oz=28g
 None
 Bulkhead Inside _____ oz _____ g
 On the skid plate _____ oz _____ g



4.8mm Ball Stud:
 UM128 (Std.)
 UMW508 (+2mm High Mount)



Caster:
 25°
 30°

4.8mm Ball Stud Spacer: _____ mm

Camber: _____°

Spacer: 0.5 0°
 1.0 2°
 None 4°


AL. Steering Support:

None
 UMW724

Axle Spacer:
 Out _____ mm
 In _____ mm

Wheel Hub:
 UM569 / Std
 UM506

Caster Block Position:
 IN (wide/Std)
 OUT (Narrow)



4.8mm Ball Stud:


LA246 (-1mm Low Mount)
 97050M (Std)

Ackerman Steer Spacer: _____ mm

UMW701 Aluminum ST Plate
 UMW702 Aluminum Clank Arm

Bump Steer Spacer: _____ mm
 Axle Height Spacer: _____ mm

_____ mm
 _____ mm



Wheelbase: F: _____ mm R: _____ mm


Rear Suspension



Shock Position:

Wing Stay Position:

Upper Arm Position:



4.8mm Ball Stud:

97050M(Std)
 UM129

Upper Spacer: _____ mm

Sus. Arm:

LA272(Std)
 UM713

Camber _____°

Hub Carrier:

Type-B (UM519)
 Type-B2 (UM519-2)

Upper Spacer: _____ mm

Slipper Type
 Separates Direct
 0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Sway Bar:

None
 _____ mm

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Toe In: _____°



Wheelbase:

Front: _____ mm


Rear: _____ mm

Rear Diff


Gear Diff. # _____
 Ball Diff. _____

Shock

	Front		Rear	
Piston:	_____	_____	_____	_____
Oil:	# _____	# _____	# _____	# _____
Spring:	_____	_____	_____	_____
Limiters:	in _____	mm _____	in _____	mm _____
	out _____	mm _____	out _____	mm _____
Length(A):	_____ mm	_____ mm	_____ mm	_____ mm
O-ring:	_____	_____	_____	_____
Shock Top type:	<input type="checkbox"/> Alu(UM719/Std) <input type="checkbox"/> UM753-1			
Ball End type:	Front:	<input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L	_____	_____
	Rear:	<input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L	_____	_____



Chassis

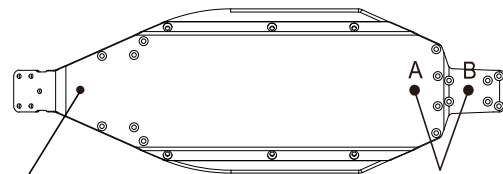

F _____ mm Ride Height: A B R _____ mm

Material

Screw: Steel Titanium
 Pinion Gear: Steel Aluminium

Electronics

Motor: _____
 ESC: _____
 Setting: _____
 Battery: _____
 Pinion/Spur: _____
 Radio: _____
 Servo: _____
 Receiver: _____

Track Condition

Smooth Sandy
 Bumpy Soft Dirt
 Low Truction Grass
 Med. Truction Blue Groove
 Higt Truction Clay
 Wet Dusty
 Dry Astro turf

Wing

Wing Mount :
 Blast-S Narrow
 Blast-L Wide
 Step-S
 Step-M
 Step-L
 Step 2.0
 Step 3.0
 Straight
 Round
 Lip : _____

Wing Angle :

4°
 7°
 10°

Tire

	Front	Rear	Comment:
Tire:	_____	_____	_____
Inserts:	_____	_____	_____
Wheel:	_____	_____	_____

Comment
