


ULTIMA RZ6 SET UP SHEET

KYOSHO
THE FINEST RADIO CONTROL MODELS

Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Toe: In Out _____°

Tie Rod: _____

Front Bulkhead


Weight Placement:

- None
- Bulkhead Inside _____ g
- On the skid plate _____ g


4.8mm Ball Stud:

- UM128(Std.)
- UMW508(+2mm High Mount)

Upper Spacer:



4.8mm Ball Stud Spacer:



Caster:

- 25°
- 30°
- A (UM502)
- B (UM721/Std)
- B (UMW722/Brass)
- B (UMW723/Alu)
- C (UM567)

- 0.5
- 1.0
- None


Comments: _____

Camber:



AL. Steering Support:

- None
- UMW724



4.8mm Ball Stud:

- LA246 (-1mm Low Mount)
- 97050M (Std)


Ackerman Steer Spacer:

- _____ mm
- Front(std) Rear

Option:

- UMW701 Alu ST Plate
- UMW702 Alu Clank Arm

Bump Steer Spacer:

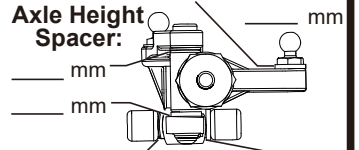

Axle Height Spacer:

- _____ mm
- _____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Suspension:

Shock Position:




Wing Stay Position:

Shock Stay Type:

- LA352(std)
- LAW59 (Carbom/2mmLow)

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer:


_____ mm

Camber:



Sus.Arm:


- LA272(std)
- UM713B

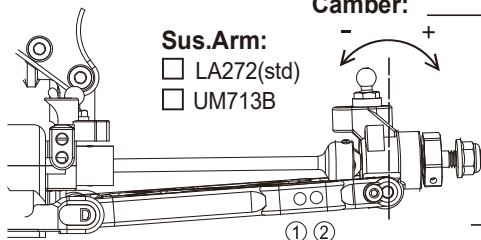

Upper Spacer:

_____ mm

Hub Carrier:



- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)



Wheelbase:

_____ mm _____ mm _____ mm _____ mm

Lower Sus Holder Block:

Front _____ Rear _____

Toe In:

_____°

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments:

Shock:

Front

Rear

Shock Piston:

Shock Oil:

_____ # _____

Shock Spring:

Limiters:

in _____ mm out _____ mm

in _____ mm out _____ mm

Shock Length(A):

_____ mm _____ mm


Shock Top Type:

- Alu(UM719/Std)
- UM753-1

5.8mm Ball End:


Front: S M L

Rear: S M L



Chassis:

Ride Height:

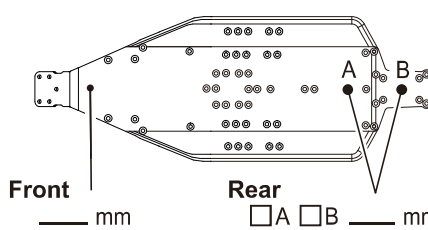

Front _____ mm

Rear A B _____ mm

Tire:

Front

Rear

Tire:

Inserts:

Wheel:

Traction Compound:

Electronics:

Battery:

- Saddle Pack Short

Battery Position:


- Std 8mm Front

Motor Position:

- Front Rear

Motor Mount Position:

- Std 8mm Front



Motor:

Pinion/Spur: _____ / _____

- Smooth Sandy
- Bumpy Soft Dirt
- Low Traction Grass
- Med. Traction Blue Groove
- High Traction Clay
- Wet Dusty
- Dry AstroTurf
- _____

Body / Wing:

Body:

Wing Mount:

- Narrow Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- 4° 7° 10°

Lip Height:

_____ mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear