

Name _____

Date _____

Track / City _____

Event _____

Front Suspension



Upper Spacer: _____ mm

Front Tower:

- ☐ Std
☐ JT Tower

Toe: ☐ In ☐ Out _____°

Tie Rod: _____

Front Bulkhead


Weight Placement: * 1oz=28g

- ☐ None
☐ Bulkhead Inside _____ oz _____ g
☐ On the skid plate _____ oz _____ g




4.8mm Ball Stud:

- ☐ UM128 (Std.)
☐ UMW508 (+2mm High Mount)



4.8mm Ball Stud Spacer: _____ mm



Caster:

- ☐ 25°
☐ 30°

Camber: _____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°


_____°

_____°

_____°

AL. Steering Support:

- ☐ None
☐ UMW724



4.8mm Ball Stud:

- ☐ LA246 (-1mm Low Mount)
☐ 97050M (Std)

Ackerman Steer Spacer: _____ mm

- ☐ UMW701 Aluminum ST Plate
☐ UMW702 Aluminum Clank Arm

Axle Spacer:

- ☐ Out _____ mm
☐ In _____ mm

Wheel Hub:

- ☐ UM569 / Std
☐ UM506

Caster Block:

- ☐ 0°
☐ 2°
☐ 4°


Caster Block Position:

- ☐ IN (wide/Std)
☐ OUT (Narrow)

Bump Steer Spacer: _____ mm

Axle Height Spacer:

- ☐ _____ mm
☐ _____ mm



Wheelbase: F: _____ mm R: _____ mm


Rear Suspension

Shock Position:



Wing Stay Position:

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129

Upper Spacer: _____ mm

Sus. Arm:

- ☐ LA272(Std)
☐ UM713
☐ _____

Camber _____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°

_____°


_____°

_____°

_____°


_____°

Hub Carrier:



Upper Spacer: _____ mm

Shock Position:



Wheelbase:

Front: _____ mm

Rear: _____ mm

Slipper Type

- ☐ Separates ☐ Direct

- ☐ 0°Type-B(UM519)
☐ 0°Type-B2(UM519-2)
☐ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)

Sway Bar:

- ☐ None
☐ _____ mm

Lower Sus Holder Block:

Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Rear Diff

- ☐ Gear Diff. # _____

- ☐ Ball Diff. _____

Shock

Front

Rear

Piston:

Oil: # _____ # _____

Spring:

Limiters: in _____ mm out _____ mm


Length(A): _____ mm

O-ring: _____


Shock Top type: ☐ Alu(UM719/Std) ☐ UM753-1

Ball End type: Front: ☐ S ☐ M ☐ L

Rear: ☐ S ☐ M ☐ L



Chassis

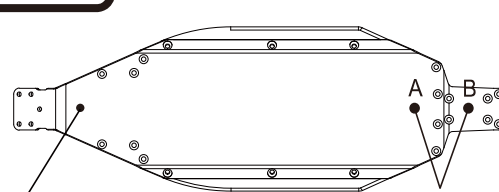

F _____ mm Ride Height: ☐ A ☐ B R _____ mm

Material

Screw: ☐ Steel ☐ Titanium

Pinion Gear: ☐ Steel ☐ Aluminium

Electronics

Motor: _____

ESC: _____

Setting: _____

Battery: _____

Pinion/Spur: _____

Radio: _____

Servo: _____

Reciever: _____

Track Condition

- ☐ Smooth
☐ Bumpy
☐ Low Truction
☐ Med. Truction
☐ Higt Truction
☐ Wet
☐ Dry

- ☐ Sandy
☐ Soft Dirt
☐ Grass
☐ Blue Groove
☐ Clay
☐ Dusty
☐ Astroturf
☐ _____

Wing

- ☐ Blast-S
☐ Blast-L
☐ Step-S
☐ Step-M
☐ Step-L
☐ Step 2.0
☐ Step 3.0
☐ Straight
☐ Round

Wing Mount :

- ☐ Narrow
☐ Wide

Wing Angle :

- ☐ 4°
☐ 7°
☐ 10°

Lip :

Tire

Front

Rear

Comment:

Tire: _____

Inserts: _____

Wheel: _____

Comment