


Name _____ Date _____ Track / City _____ Event _____

Front Suspension




Upper Spacer: _____ mm

4.8mm Ball Stud:
 UM128 (Std)
 UMW508 (+2mm High Mount)

Shock Mount:
 IN
 OUT

Camber: _____ °



Forward (Std)
 Reverse


4.8mm Ball Stud:
 LA246 (-1mm Low Mount)
 UM129 (Std)

Ackerman Steer Spacer: _____ mm

Bump Steer Spacer: _____ mm

Toe: In Out _____ °

Sus Mount:
 UM503
 UM567
 UM721



Castor Spacer:
 25° 0.5
 30° 1.0
 None

Axle Spacer:
 Out _____ mm


Axle Height Spacer:
 Up
 Down

Castor Block:
 IN (wide/Std)
 OUT (Narrow)


Wheelbase: Long Middle Short

Comments: _____

Rear Suspension



UM788 UM706




Upper Spacer: _____ mm

Comments: _____

Sus Holder Spacer:

F 0.5 1.0 None
 R 0.5 1.0 None

Anti-Squat: _____ °
Sway Bar: None _____ mm



Upper Spacer: _____ mm

Wheelbase:

F: _____ mm
 R: _____ mm

Camber: _____ °

Rear Hub add Toe:
 0° Type-B (UM519)
 0° Type-B2 (UM519-2)
 0° Alu (UMW704-0)
 0.5° Alu (UMW704-05)
 1° Alu (UMW704-1)

Axle Spacer:
 Out _____ mm
 In _____ mm

Lower Sus Holder:

Normal Aluminum(Opt)
 RF RF2 Front _____ Rear _____

Drive

Rear Motor
 Midship Motor

Diff

Gear Diff. # _____
 Ball Diff. _____

Shocks

Front

Rear

Shock Piston: _____

Shock Oil: # _____ # _____


Shock Spring: _____

Limiters: in _____ mm out _____ mm

Shock Length(A): _____ mm


Shock Top Type: Nomal Alu(UM719)

5.8mm Ball End:
 Front: S M L
 Rear: S M L



Chassis

Weight Placement

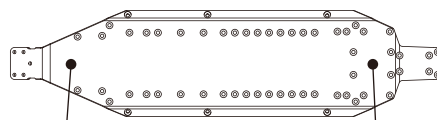

F _____ mm **Ride Height:** R _____ mm

Tires

Front

Rear

Tire: _____

Inserts: _____

Wheel: _____

Traction Compound: _____

Comment : _____

Battery Placement



Electronics

Motor: _____

Pinion/Spur: _____

Battery: _____

ESC: _____

Radio: _____

Servo: _____

Throttle/Brake: _____

EPA: _____ Expo: _____

Initial brake: _____

Drag brake: _____

Throttle profile: _____

Steering expo: _____

Steering speed: _____

Body

Material

Screw: Steel Titanium

Servo Hone: Nomal Rigid(UM717)

Pinion Gear: Steel Aluminium

Shock Ring: O-ring X-ring Red Clear