


LAZER ZX6.6 SETUP SHEET

KYOSHO
THE FIRST RACING COMPANY BORN

Name: Enzo Albertani Date: 3/11/18 Track / City: Beach RC, South Carolina Event: Palmetto Classic

Front Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW58)
- Other: JTP

Lower Sus Holder Block:

Front Bin Rear Bin

Lower Sus Holder Spacer:

Front 1 mm Rear 0 mm

Comments: Middle hole on front tower

Upper Arm Position:




4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: 1 mm

Camber: -1

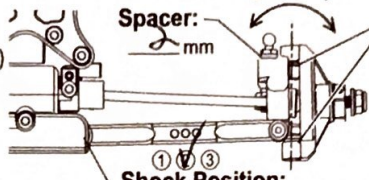

Spacer:

2 mm

Axle-Height Spacer:

- Up
- Down

Caster Block:

- 7°
- 10°

Bump Steer Spacer:

0 mm

Toe:

- In
- Out 5

Sway Bar:

- None
- 1 mm

Ackerman Spacer:

0.5 mm

Front Diff:

- Gear Diff. # 5000
- Ball Diff.

Rear Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW59)
- Other: JTP

Wing Stay Position:

Lower Sus Holder Block:

Front Pin Rear Pin

Lower Sus Holder Spacer:

Front 1 mm Rear 5 mm

Comments: Middle hole on JTP tower

Upper Arm Position:




4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: 1 mm

Toe In: 3

Camber: -1



Wheelbase:

Front 2 mm
Rear 0 mm

Stiffener:

- Std.
- Carbon Comp. (LAW53)

Hub Carrier:

- 0° Type-B (UM519)
- 0° Type-B2 (UM519-2)
- 0° Alu (UMW704-0)
- 0.5° Alu (UMW704-05)
- 1° Alu (UMW704-1)

Upper Spacer: 2 mm

- 0° Type-B (UM519)
- 0° Type-B2 (UM519-2)
- 0° Alu (UMW704-0)
- 0.5° Alu (UMW704-05)
- 1° Alu (UMW704-1)

Sway Bar:

- None
- 1.1 mm

Center Plate:

- Std.
- Aluminum (LAW55)

Rear Diff:

- Gear Diff. # 5000
- Ball Diff.

Shock:

Shock Piston:

Front 2x1.6 Rear 2x1.6

Shock Oil:

37.5wt # 32.5wt

Shock Spring:

Front Red Rear White

Limiters:

in mm out mm in mm out mm

Shock Length (A):

Front 20.5 mm Rear 28.6 mm


Shock Top Type: Alu. (UM719/Std) UM753-1

5.8mm Ball End:

- Front: S M L
Rear: S M L



Chassis:

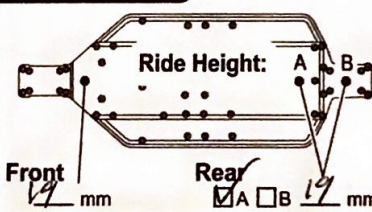

Front 19 mm

Rear A B 19 mm

Tire:

Front PL Position Rear PL Position
Compound: MC MC
Inserts: Std Std
Wheel: Kyo Kyo
Note: FDJ Dew

Electronics:

- Battery:** Saddle Pack Short
- Motor Position:** Front Rear
- Servo Mounting:** Straight Sideways Aluminum (LAW56)
- Motor Mount Position:** Std 8mm Front
- Battery Position:** Std 8mm Front
- Motor:** REDS 5.5t
- Pinion / Spur:** 19/78
- ESC:** REDS

Body / Wing:

Body:

Stock

Wing Mount:

- Narrow
- Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- 4°
- 7°
- 10°

Lip Height:

_____ mm

Material:

- Screw: Steel Titanium

Pinion Gear:

- Steel
- Aluminum

Shock O-Ring:

- O-ring
- X-ring
- Red
- Clear

JTP front/rear towers, JTP 2.5mm carbon chassis stiffener, JTP battery strap.