

Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW58)
- Other _____

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: _____ mm

Camber _____ °

Spacer:

_____ mm

Axle-Height Spacer:

- Up
- Down


Caster Block:

- 7°
- 10°

Shock Position:

Wheelbase: Front _____ mm
Rear _____ mm

Bump Steer Spacer:



Toe: _____ mm
 In
 Out _____ °

Sway Bar:

- None
- _____ mm

Ackerman Spacer:


_____ mm

Front Diff:

- Gear Diff. # _____
- Ball Diff. _____

Rear Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW59)
- Other _____

Wing Stay Position:

Lower Sus Holder Block:



Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: _____ mm

Toe In: _____ °

Sus. Arm:

- LA272(Std)
- UM713B

Camber _____ °

Hub Carrier:




Type-B (UM519)
Type-B2 (UM519-2)

Upper Spacer: _____ mm

Wheelbase:

Front _____ mm
Rear _____ mm

Shock Position:



Wheelbase:

Front: _____ mm
Rear: _____ mm

Center Drive :

- Diff. Gear # _____
- Slipper Clutch
- Separates
- Direct

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

Sway Bar:

- None
- _____ mm

Center Plate:

- Std.
- Aluminum (LAW55)

Rear Diff:

- Gear Diff. # _____
- Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

Shock Oil:

_____ # _____

Shock Spring:

Limiters:

in out mm mm in out mm mm

Shock Length (A):


_____ mm _____ mm

Shock Top Type:

- Alu. (UM719/Std)
- UM753-1


5.8mm Ball End:

- Front: S M L
Rear: S M L



Chassis:

Ride Height:

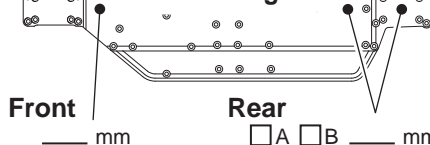

Front _____ mm Rear A B _____ mm

Tire:

Front

Rear

Tire: _____
Compound: _____
Inserts: _____
Wheel: _____
Note: _____

Electronics:

- Battery: Saddle Pack
 Short

- Motor Position: Front
 Rear

- Servo Mounting: Straight
 Sideways
 Aluminum (LAW56)

- Motor Mount Position:
 Std 8mm Front

- Battery Position:
 Std 8mm Front

Motor: _____

Pinion / Spur: _____

ESC: _____

Body / Wing:

Body: _____ Wing Mount: Narrow Wide Wing Dum Height: _____ mm

Wing: _____ Wing Angle: 4° 7° 10° Lip Height: _____ mm

Material:

- Screw: Steel Titanium

Pinion Gear: Steel Aluminum

Shock O-Ring: O-ring X-ring Red Clear

Track Condition

- Smooth
- Bumpy
- Low Traction
- Med. Traction
- Higt Traction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groove
- Clay
- Dusty
- _____