

Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW58)
- Other _____

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:




4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: _____ mm

Camber _____°

Spacer: _____ mm

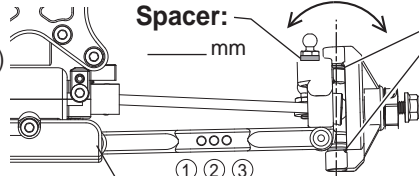


Shock Position:

Wheelbase: Front _____ mm

Rear _____ mm

Bump Steer Spacer: _____ mm



Toe:

- In _____°
- Out _____°

Sway Bar:

- None
- _____ mm

Ackerman Spacer: _____ mm



Axle-Height Spacer:

- Up
- Down

Caster Block:

- 7°
- 10°

Stiffener:


- Std.
- Carbon Comp. (LAW52)

Front Diff:

- Gear Diff. # _____
- Ball Diff. _____

Rear Suspension:

Shock Position:

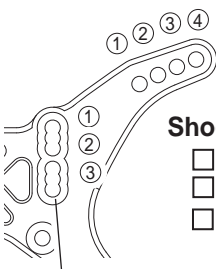

Shock Stay:

- Std.
- Carbon (LAW59)
- Other _____

Wing Stay Position:

Lower Sus Holder Block:



Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129


Upper Spacer: _____ mm

Toe In: _____°

Sus. Arm:

- LA272(Std)
- UM713B

Camber _____°

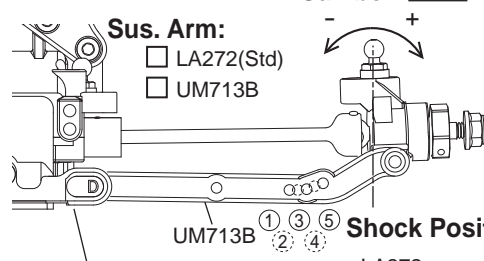

Wheelbase:

Front _____ mm

Rear _____ mm


Stiffener:

- Std.
- Carbon Comp. (LAW53)

Hub Carrier:



Upper Spacer: _____ mm



Wheelbase:

Front: _____ mm

Rear: _____ mm

Center Drive :

- Diff. Gear # _____
- Slipper Clutch
- Separates
- Direct

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

Sway Bar:

- None
- _____ mm

Center Plate:

- Std.
- Aluminum (LAW55)

Rear Diff:

- Gear Diff. # _____
- Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

Shock Oil:

_____ # _____

Shock Spring:

Limiters:

in out mm mm in out mm mm


Shock Length (A): _____ mm

_____ mm

Shock Top Type: Alu. (UM719/Std) UM753-1


5.8mm Ball End:

- Front: S M L
- Rear: S M L



Chassis:

Ride Height:

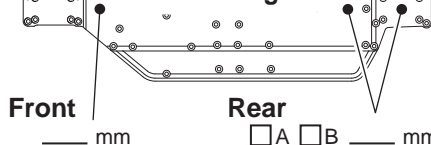

Front _____ mm

Rear

A B _____ mm

Tire:

Front

Rear

Compound: _____

Inserts: _____

Wheel: _____

Note: _____

Electronics:

- Battery: Saddle Pack Short

- Motor Position: Front Rear

- Servo Mounting: Straight Sideways Aluminum (LAW56)

- Motor Mount Position: Std 8mm Front

- Battery Position: Std 8mm Front

Motor: _____

Pinion / Spur: _____

ESC: _____

Body / Wing:

Body:

Wing Mount:

Wing Dum Height:

Narrow Wide _____ mm

Wing:

Wing Angle:

Lip Height:

4° 7° 10° _____ mm

Material:

- Screw: Steel Titanium

- Pinion Gear: Steel Aluminum

- Shock O-Ring: O-ring X-ring Red Clear

Track Condition

- Smooth
- Bumpy
- Low Traction
- Med. Traction
- Higt Traction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groove
- Clay
- Dusty
- _____