

Name Nick Caro Date 13th November 2016 Track / City Chadderton Event oOpleSeries Rd2

Front Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW58)
- Other

Lower Sus Holder Block:


Front A Rear A

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: *Inside Camber link hole on hub*

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: 0.5 mm

Camber -1°

Bump Steer Spacer:

2 mm

Toe:

- In
- Out 1°

Sway Bar:

- None
- 1.4 mm

Ackerman Spacer:

0 mm

Spacer:

2 mm

Axle-Height Spacer:

- Up
- Down

Caster Block:

- 7°
- 10°

Shock Position:

Wheelbase: Front 0 mm
Rear 1 mm

Stiffener:


- Std.
- Carbon Comp. (LAW52)

Front Diff:

- Gear Diff. # 3k
- Ball Diff.

Rear Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW59)
- Other

Wing Stay Position:

Lower Sus Holder Block:


Front B - in Rear E - out

Lower Sus Holder Spacer:

Front 2 pip mm Rear 1 pip mm

Comments: *2.5deg inboard + 0.5 Hubs (3deg)*

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: 2 mm

Stiffener:

- Std.
- Carbon Comp. (LAW53)

Center Drive :

- Diff. Gear
- Slipper Clutch
- # _____
- Separates
- Direct

Toe In: 2.5°

Camber -1°

Sus. Arm:

- LA272(Std)
- UM713B

Hub Carrier:

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)


- None
- 1.6 mm

Sway Bar:

- None
- 1.6 mm


Center Plate:

- Std.
- Aluminum (LAW55)



Wheelbase:

Front 2 mm
Rear 0 mm



Shock Position:

Upper Spacer:

2 mm

Wheelbase:

Front: 0 mm
Rear: 4 mm

Rear Diff:

- Gear Diff. # 3k
- Ball Diff.

Shock:

Front

Rear

Shock Piston: 2 x 1.6 2 x 1.7

Shock Oil: # 32.5wt AE # 30wt AE

Shock Spring: Gold Gold

Limiters:


in		mm		in		mm	
out	mm	out	mm	out	mm	out	mm

Shock Length (A): 20 mm 28 mm


Shock Top Type: Alu. (UM719/Std) UM753-1

5.8mm Ball End:

- | | | | |
|--------|----------------------------|---------------------------------------|----------------------------|
| Front: | <input type="checkbox"/> S | <input checked="" type="checkbox"/> M | <input type="checkbox"/> L |
| Rear: | <input type="checkbox"/> S | <input checked="" type="checkbox"/> M | <input type="checkbox"/> L |



Chassis:

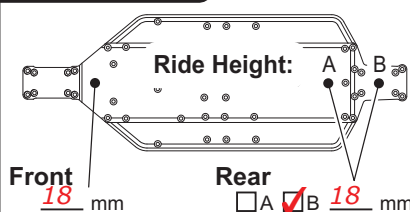

Front 18 mm

Rear A B 18 mm

Tire:

Front

Rear

Tire: 4wd Cut Stagger Mini Spike

Compound: Yellow Yellow

Inserts: Medium Medium

Wheel: Kit Kit

Note:

Electronics:

Battery:

- Saddle Pack
- Short

Motor Position:

- Front
- Rear

Servo Mounting:

- Straight
- Sideways
- Aluminum (LAW56)

Motor Mount Position:

- Std
- 8mm Front

Battery Position:

- Std
- 8mm Front

Motor: VST2 6.5

Pinion / Spur: 22/78

ESC: R10

Body / Wing:

Editable by Am0 at PettitRC.com

Body:

Kit

Wing Mount:

- Narrow
- Wide

Wing Dum Height:

_____ mm

Wing:

Step 3.0

Wing Angle:

- 4°
- 7°
- 10°

Lip Height:

_____ mm

Material:

- Screw: Steel Titanium

Pinion Gear:

- Steel
- Aluminum

Shock O-Ring:

- O-ring
- X-ring
- Red
- Clear

*Wide Hexes front and rear
Increased droop rear from
27 to 28 on medium ball
end.*

All spikes etc cut of tyres